

THE DECOMMISSIONING LINE

京张报废线

Dare to take down, dare to install — a concept urban design for the Centennial Jingzhang AI Innovation Belt

First principle: the decommissioning covenant

Every AI facility entering public space registers five fields on installation day:

- 1 install date
- 2 decommission date
- 3 removal custodian
- 4 deposit status
- 5 site-restoration standard

Default term 3 years; extension requires re-certification.
Issue, re-certify and deregister powers sit in three separate stations and may not be combined.

Two unfavorable readings, published

- 1. Max suture gap 1.55 km exceeds the proposal's own 800 m standard
- 2. Two scenario cards fail the proposal's own admission rule

Key readings (recomputed in EPSG:4548)

Overall area 11.41 sq km (provisional boundary)
Spine 9.7 km | nodes 12 | plazas 3 | sutures 8
Land-use parcels 36 (gap-free, overlap-free)
Green-ratio floor 12.1% | reserved land 55,000 sq m
Scenario cards: 10 pass + 2 self-rejected
3 pilgrimage landmarks: Covenant Hall · Observation Gallery · Decommissioning Hall

Deliberately withheld

FAR · building heights · retain-renovate-demolish conclusions · road redlines · deposit amounts · investment commitments
(each absence reasoned in metrics.json / assumptions.json)

Third-party verification: `node visual/assets/verify_covenants.js` (zero-dependency, two-sided assertions)

FIG.1

京张报废线·总体结构 一线·三站·两翼·十二节点·八缝合口

THE DECOMMISSIONING LINE — one line, three stations, two wings, 12 lifecycle nodes, 8 sutures

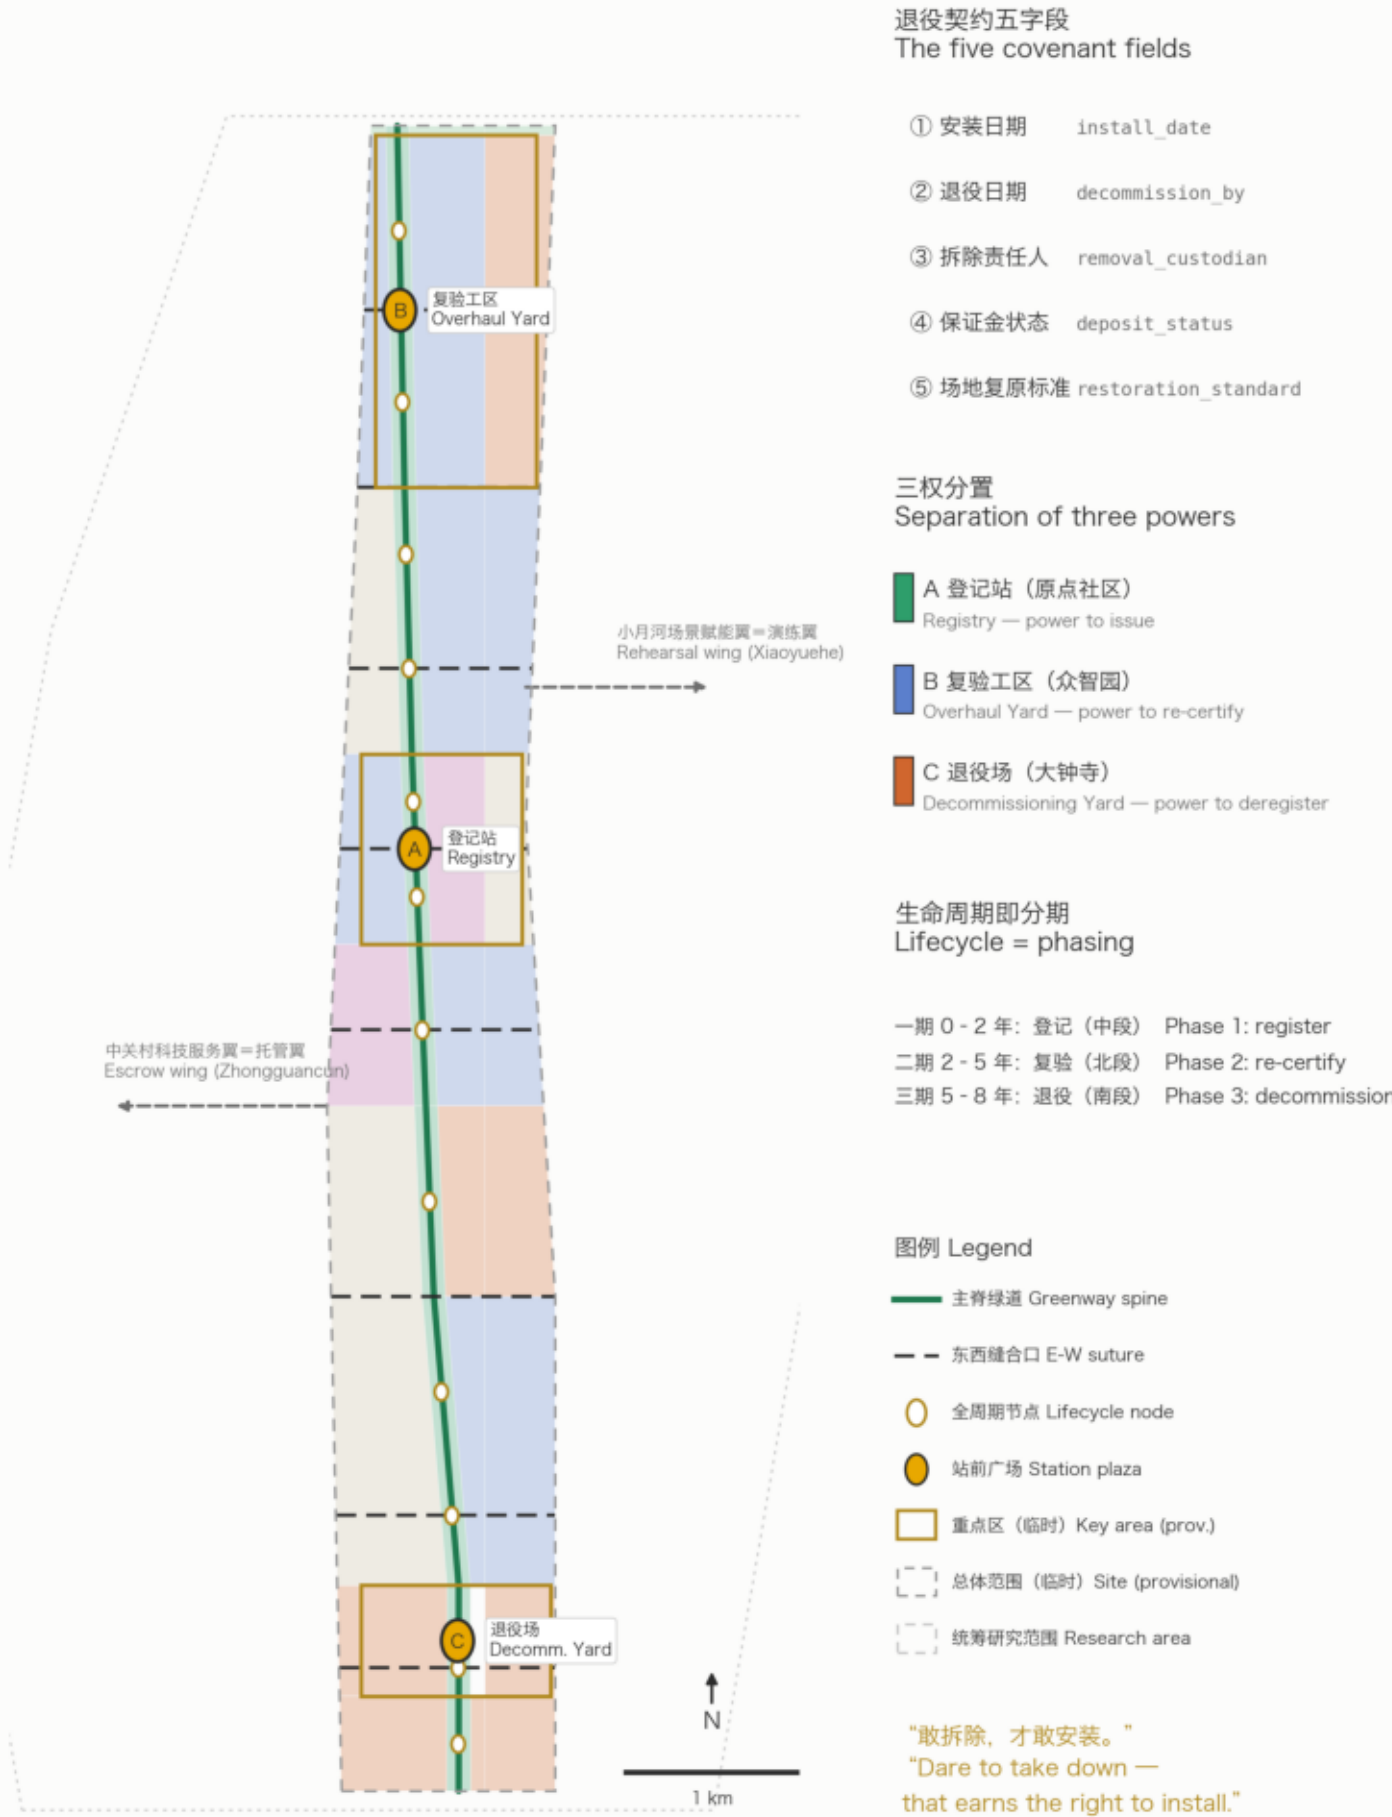


FIG.2

用地结构与全生命周期分区 36 个单元 · 零缝隙 · 零重叠

Land-use structure — 36 parcels, gap-free and overlap-free partition of the provisional boundary


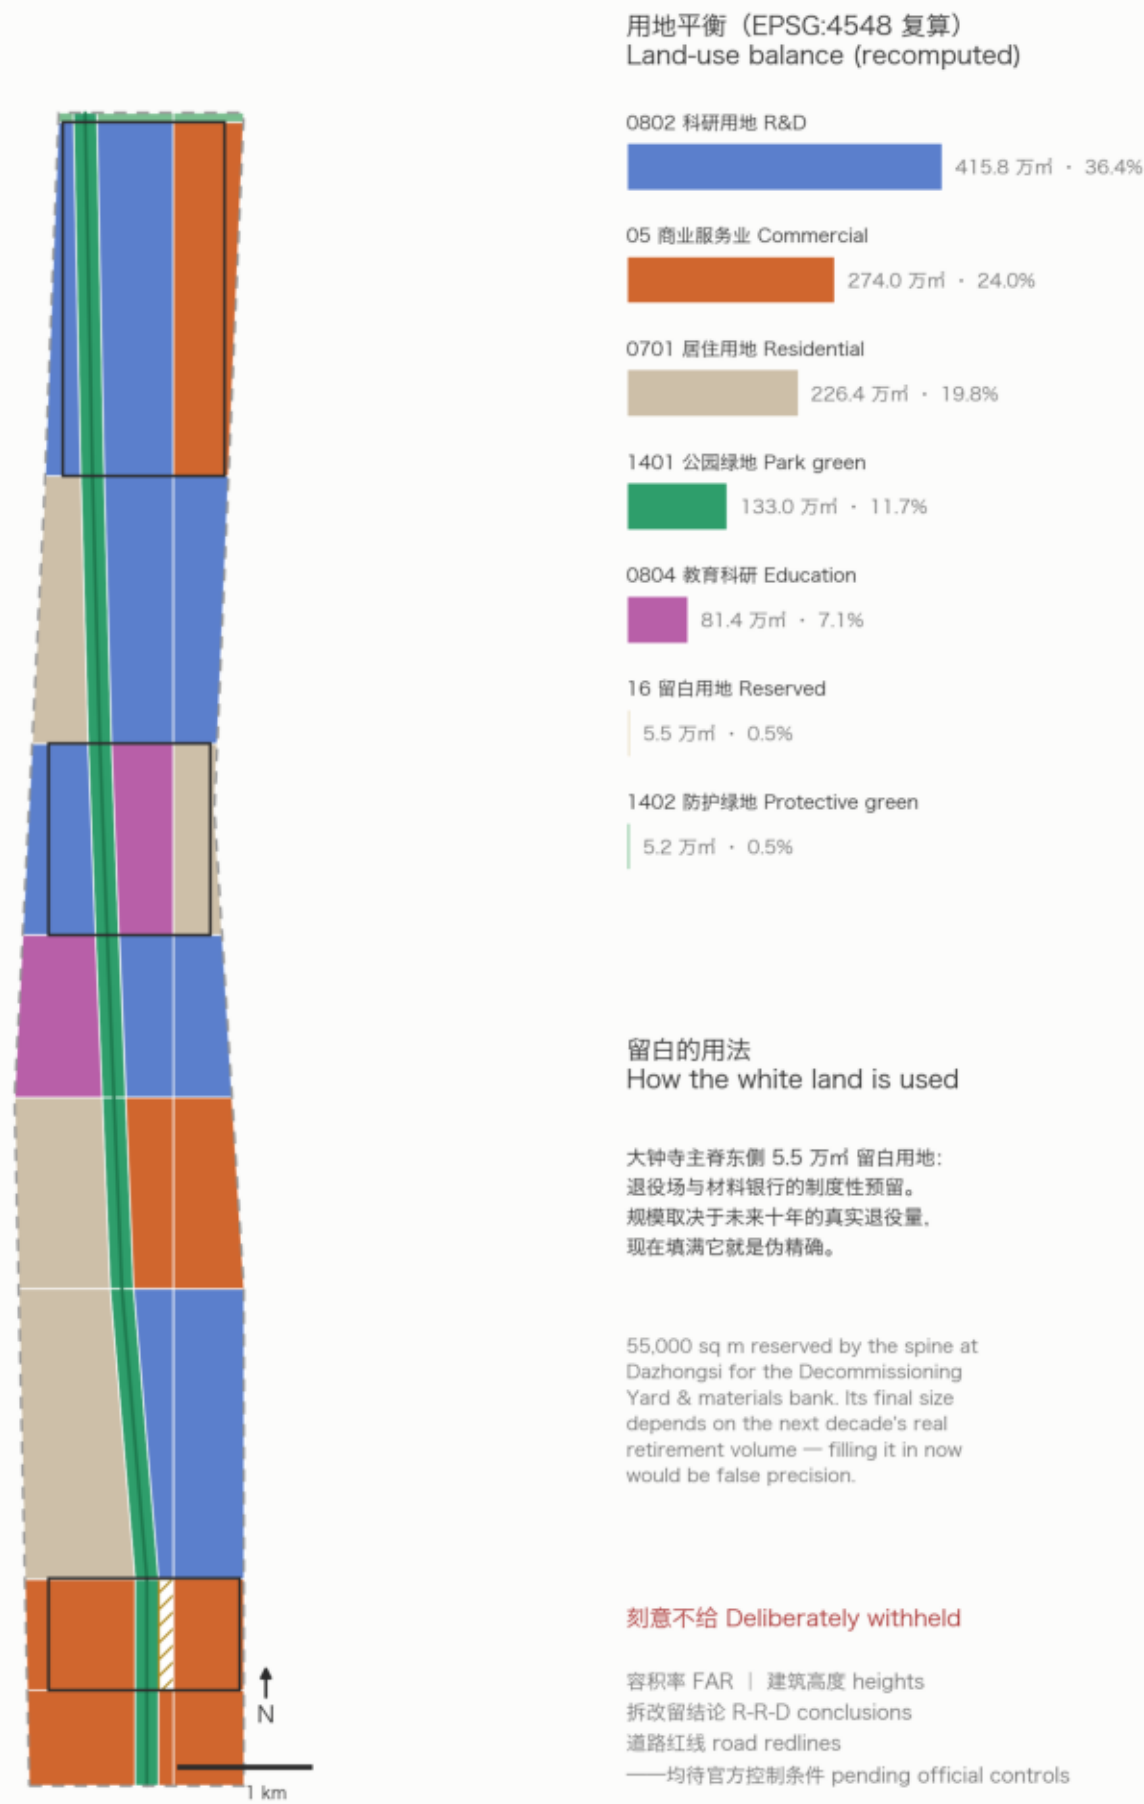



FIG.3
三站详细设计 登记站 · 复验工区 · 退役场（三权分置）
The three stations — Registry, Overhaul Yard, Decommissioning Yard (separated powers)

B 众智园 = 复验工区
Zhongzhiyuan = Overhaul Yard · power to re-certify

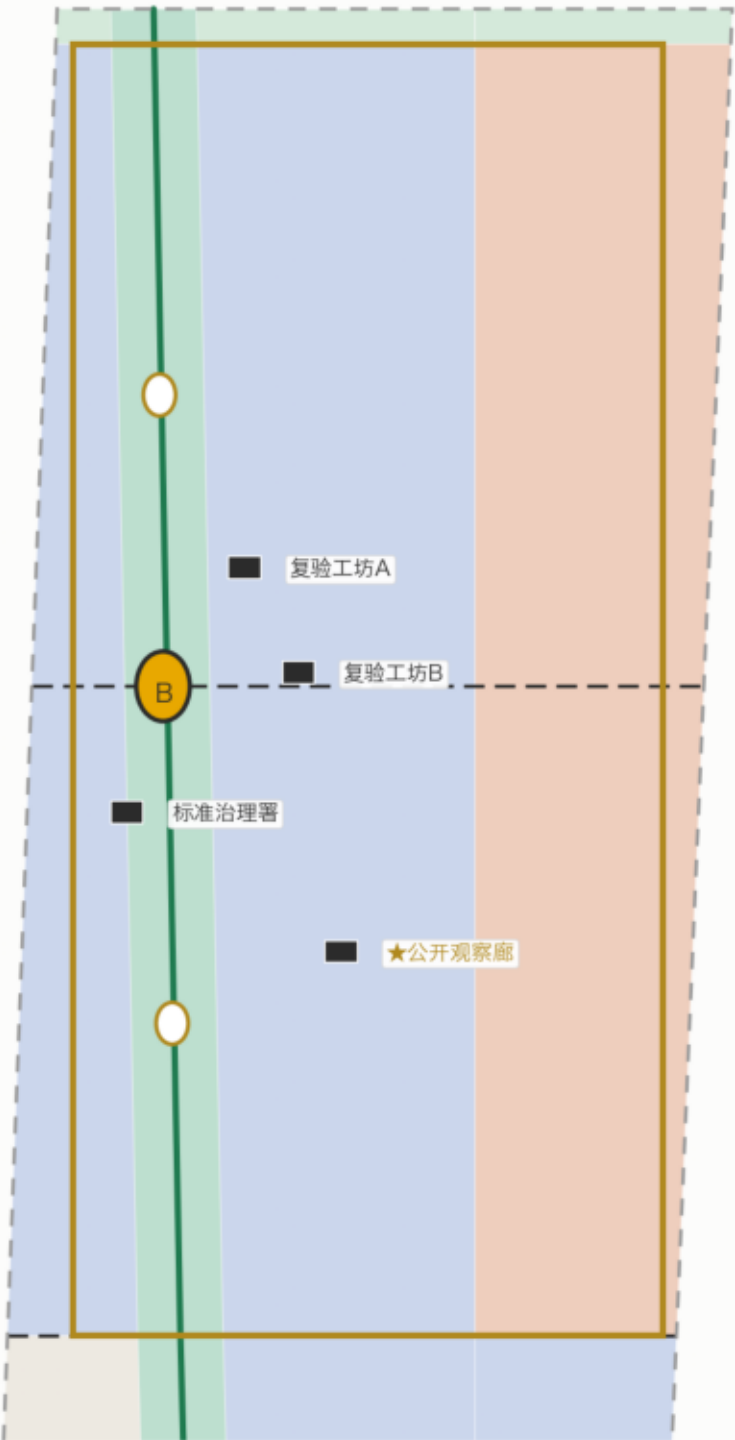


花园型：复验公开进行 · 标准制定 · 安全治理
约 192.1 万㎡ (临时对表公告 192.1 ha)

A 原点社区 = 登记站
Origin Community = Registry · power to issue

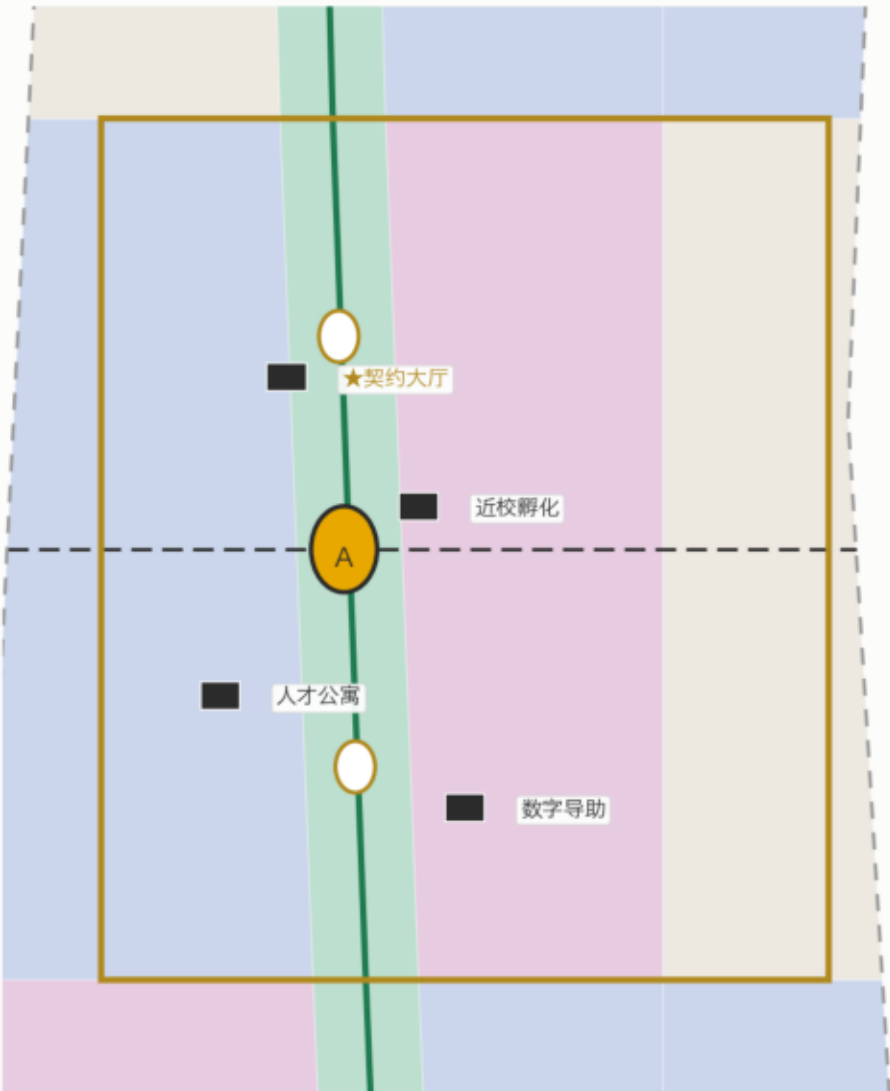

近校型：出生登记 · 首装档案 · 存量改造优先
约 104.3 万㎡ (临时对表公告 104.3 ha)

★ = AI朝圣地标 pilgrimage landmark
C 大钟寺 = 退役场
Dazhongsi = Decommissioning Yard · power to deregister

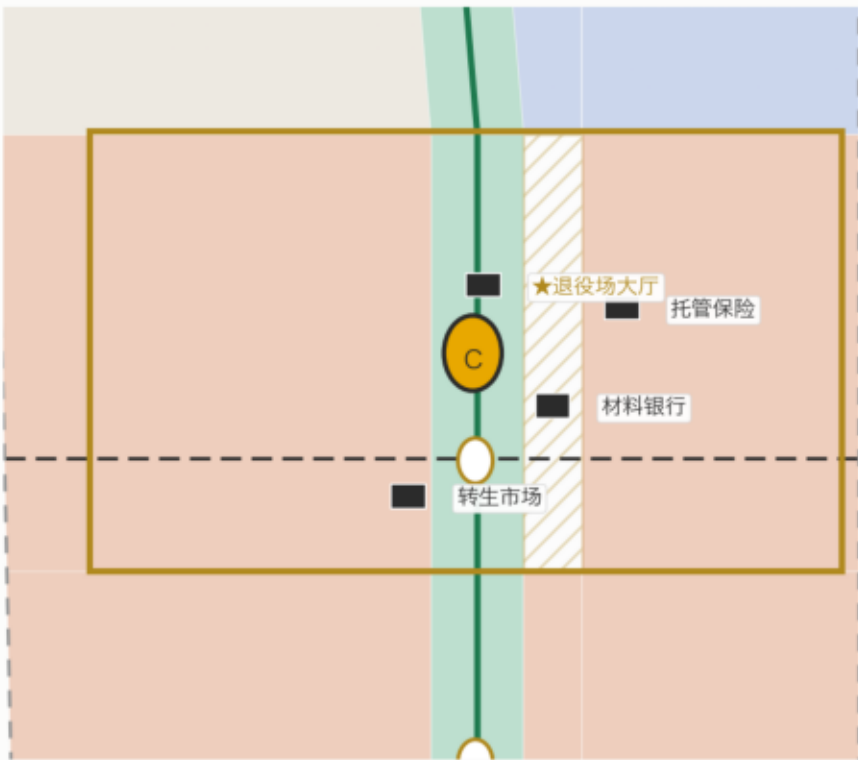


城市型：注销 · 材料银行 · 转生市场 · 城市AI档案馆
约 72.0 万㎡ (临时对表公告 72.0 ha)

边界与重点区为临时粗略范围 (provisional, 虚线灰), 不作官方红线; 数据: 本包 geometry/ (EPSG:4326 显示, EPSG:4548 复算); 智能体生成图件 (matplotlib), 2026-08。
Boundaries are provisional rough (grey dashed), not official redlines. Data: package geometry/ (EPSG:4326 display, EPSG:4548 recomputation). Agent-generated figure (matplotlib), 2026-08.

FIG.4

慢行主脊 · 八缝合口 · 蓝绿与公共空间 （含一项公开的不利读数）

Slow-mobility spine, 8 sutures, blue-green & public space — incl. one published unfavorable reading

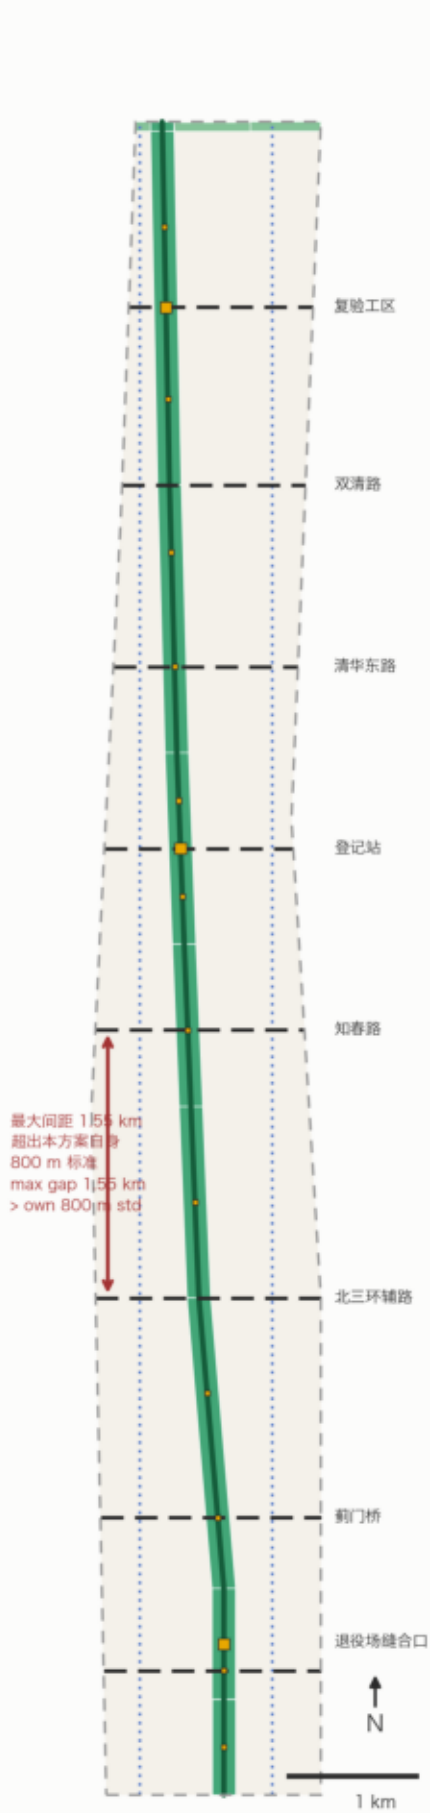

系统读数（复算值）
System readings (recomputed)

主脊长度 Spine length	9.7 km
缝合口 Sutures	8 处
全周期节点 Lifecycle nodes	12 个
站前广场 Station plazas	3 个
结构性绿地 Structural green	138.2 万㎡
绿地率下限 Green-ratio floor	12.1%
公共空间 Drawn public space	2.5 万㎡

不利读数为什么公开？
Why publish the failing reading?

本方案主张缝合口间距 ≤ 800 m，
但北三环辅路—知春路段两侧是
大型院落权属，无公开权属数据时
方案拒绝假装能开口。
缺口按假设 A-SUTURE-006 登记，
整改前提：取得权属与现状数据。


The proposal refuses to pretend it can
cut openings through large institutional
compounds without ownership data.
Registered as assumption A-SUTURE-006
with its remedy precondition.

节点小广场：石碑+电子墨水屏
屏幕退役后，石碑留下。
Stone + e-ink at every node —
when the screen retires,
the stone remains.

FIG.5

指标复算与概念自证 三类指标 · 双向断言 · 两项不利读数

Metric recomputation & self-verification — three metric classes, two-sided assertions, two unfavorable readings

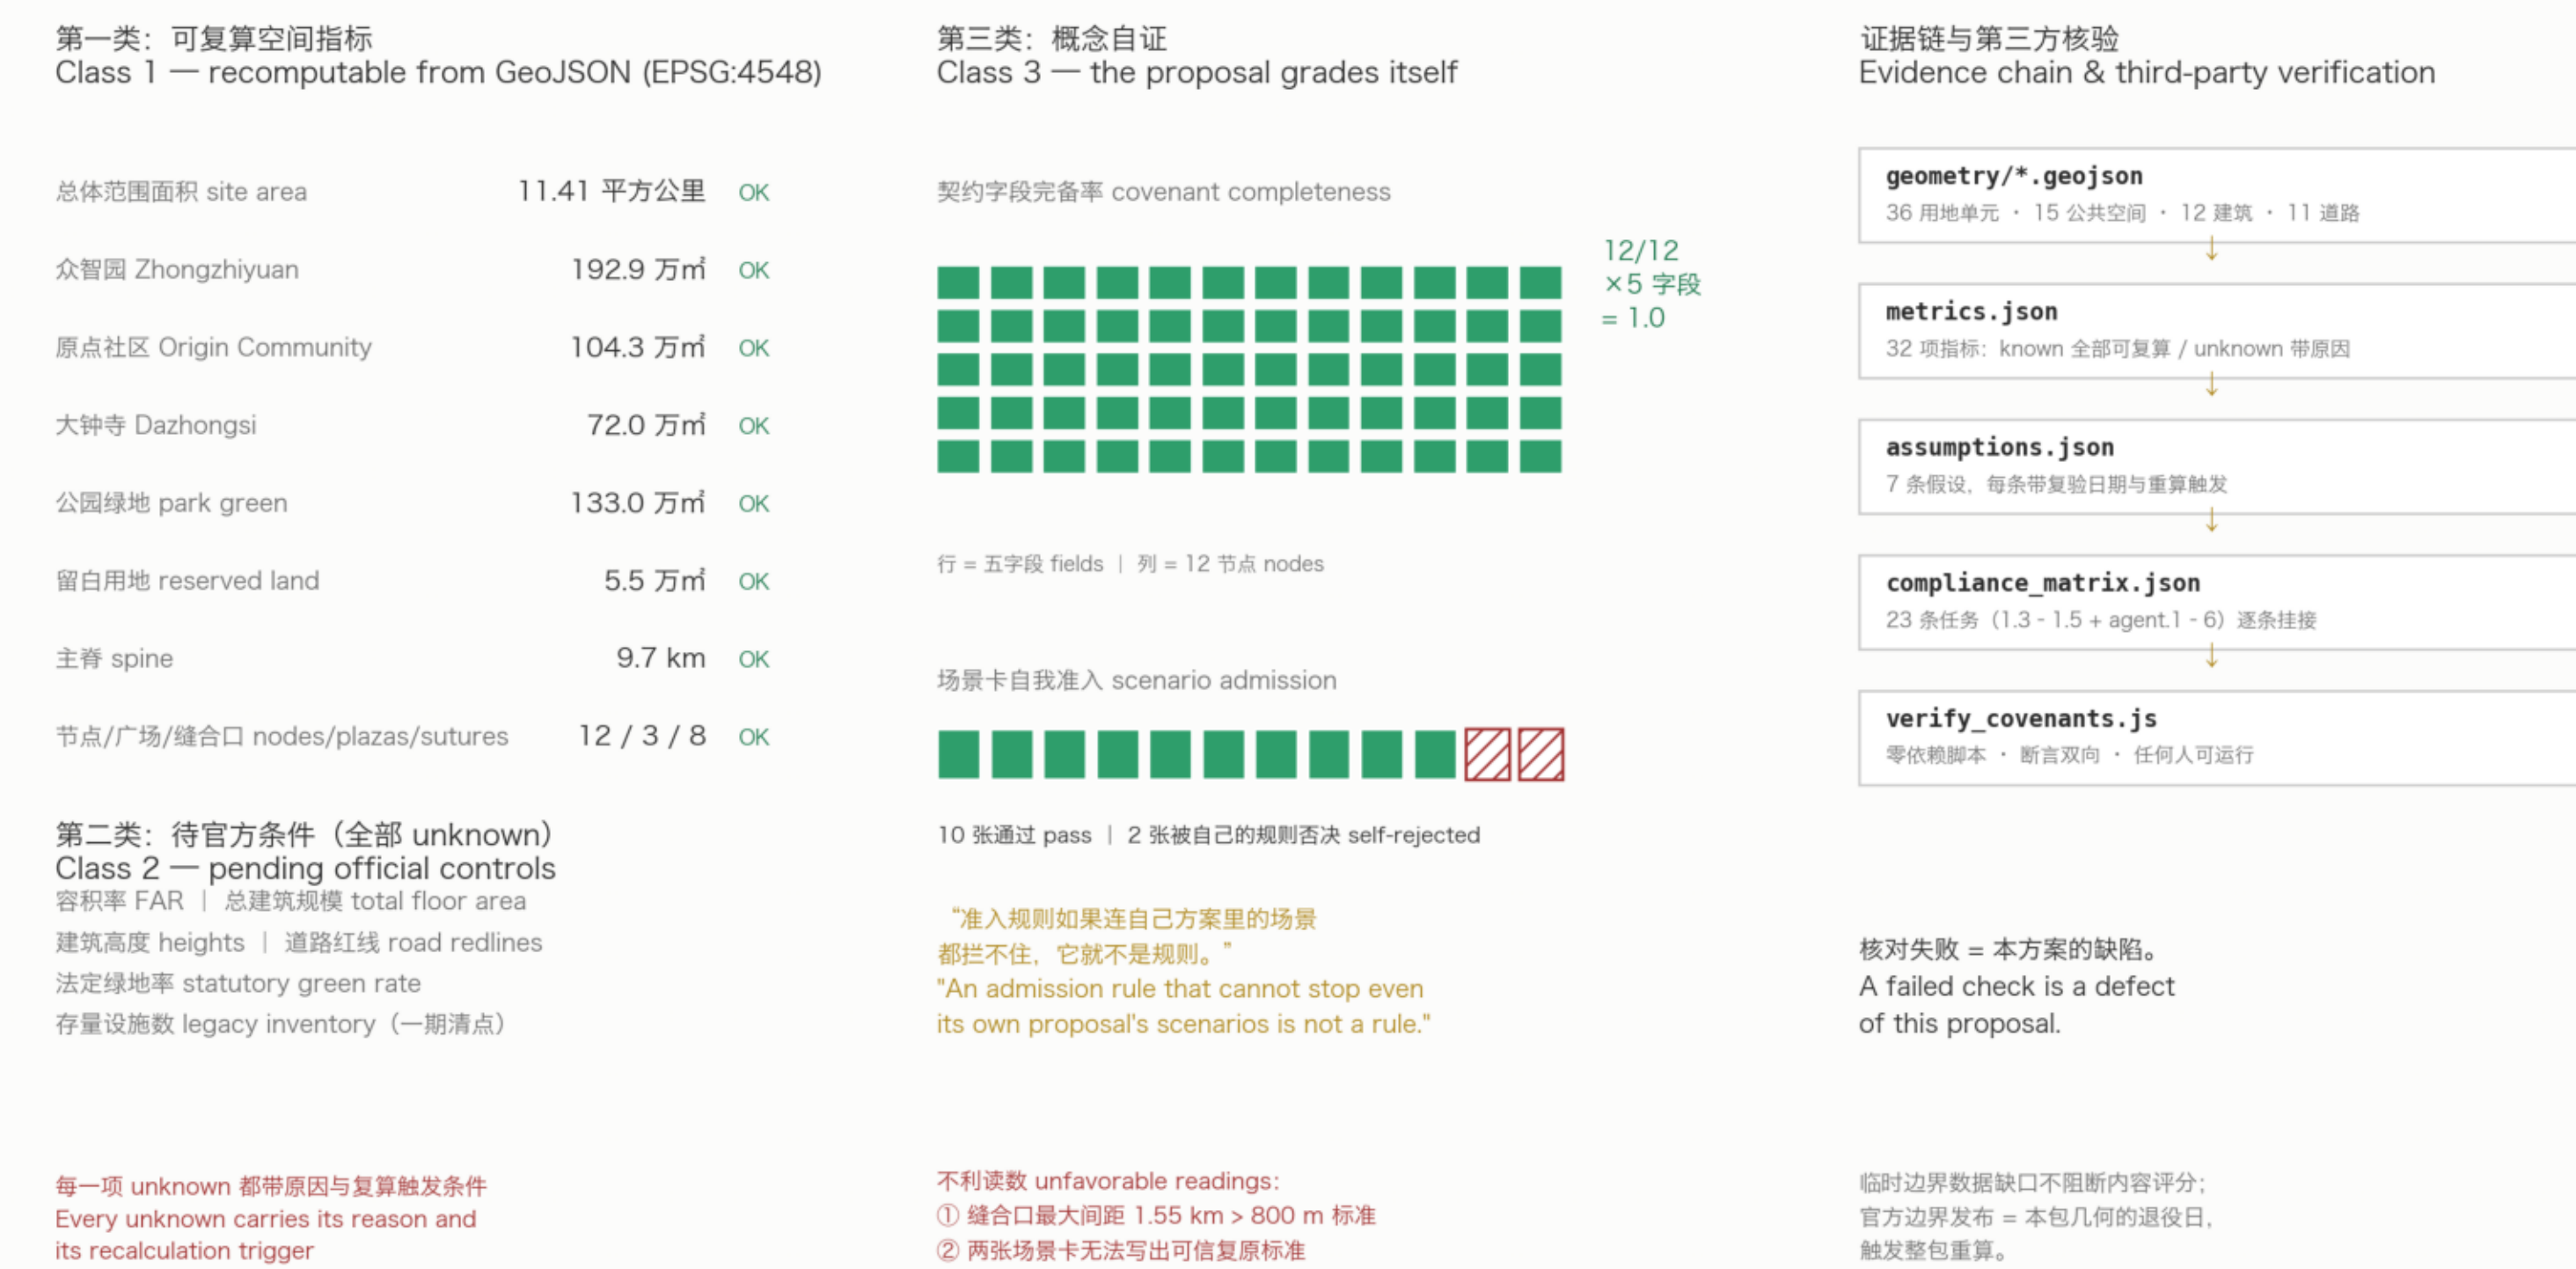

Renewal projects and phasing

ID	Project	Phase	Type	Key dependency
DL-01	Belt-wide legacy facility inventory	P1 yr0-2	institution	street & owner cooperation
DL-02	Registry Covenant Hall (adaptive reuse)	P1	renewal	building tenure negotiation
DL-03	12 node covenant markers	P1	public space	park management consent
DL-04	Rehearsal-wing unplug-test segment	P1	pilot	Xiaoyuehe site coordination
DL-05	Overhaul workshops & gallery	P2 yr2-5	new build	official controls
DL-06	First suture batch	P2	slow mobility	road redlines & traffic assessment
DL-07	Decommissioning Hall · materials bank · market	P3 yr5-8	new build / white land	white-land conversion
DL-08	Dazhongsi four-quadrant connection	P3	rail integration	rail operator & municipal

Phasing is isomorphic with the lifecycle: phase 1 builds registration capacity (middle, 4.03M sq m); phase 2 completes the Overhaul Yard as the first cohort reaches re-certification (north, 2.26M sq m); phase 3 opens the Decommissioning Yard for the first retirement wave (south, 5.12M sq m).

Assumptions register (7, each with review date and trigger)

A-CONTROLS-001 official controls pending | A-BOUNDARY-002 provisional boundary (official publication = decommission date of this geometry)
A-COVENANT-003 default 3-year term (design starting point) | A-DEPOSIT-004 no deposit figures published
A-LEGACY-005 legacy count pending phase-1 inventory | A-SUTURE-006 suture-gap shortfall (published) | A-SPINE-007 approximate spine alignment

Personas (6) and industry test scenarios (3)

Personas: researchers · open-source developers · startups · maintenance & removal workers · residents (incl. elderly) · international visitors
Test chain: unplug-test certification (right to enter) → re-certification benchmark (right to remain) → materials-recovery verification (quality of exit)

AI scenario cards (12; 2 rejected by the proposal's own rule)

#	Card	Carrier	Restoration key point / rejection reason
01	Legacy inventory patrol	whole belt	patrol devices covenant-registered; retire at task end
02	Node covenant markers	12 nodes	stone + e-ink; stone remains as street furniture
03	Public unplug drill	rehearsal wing	the drill is a public rehearsal of restoration
04	Overhaul open day	Zhongzhiyuan	indoor, no street residue
05	Second-life market	Yard	clears on close; movable stalls
06	Materials-bank open house	Dazhongsi	industrial building convertible
07	Accessible guidance	spine	embedded sockets; removal restores paving
08	Robot curb-time pilot	rehearsal wing	paint and signs only; revocation restores street
09	AI archive exhibition	Decomm. Hall	indoor
10	First-deployment program	Registry	term halved (18 mo); rehearsal wing mandatory
11	Edge-compute kiosk [REJECTED]	—	irreversible power/cooling retrofit; no credible standard
12	Data-element lounge [REJECTED]	—	no public basis for verifiable data-deletion standard