

Narrative

The heritage park becomes the operating-diagram main line (9.5 km spine), forming a three-tier spatial control system and the One-Diagram-Nine-Stations-One-Spine grammar (three major stations + six Intermediate Stops at ~1.3 km intervals). The Urban Operating Diagram is the governance core: every AI public service runs like a train on a published timetable.

Scope

- Regional study 43.6 km²: southern Haidian innovation corridor
- Overall design 11.38 km²: 1–2 km around the heritage park
- Key areas 368.4 ha: Zhongzhi 192.1 + Origin 104.3 + Dazhongsi 72.0
- 6 Intermediate Stops MS-01~06: light stops along the spine (timetable point/signal post/traveler rest/ staffed window)

Key Indicators


11.38 km² Overall design	368.4 ha Key areas	9.5 km Main line	8 Scenario cards	6 Diagram KPIs
-----------------------------	-----------------------	---------------------	---------------------	-------------------

Details

Indicator	Value	Detail
Overall design	11.38 km²	43.6 → 11.38 → 368.4 ha; three tiers
Main line	9.5 km	Five-band spine, unchanged when AI off
Key areas	368.4 ha	ZJ-01 192.1 + ZJ-02 104.3 + ZJ-03 72.0
Scenario cards	8	T-01 ~ T-08; eight fields each
Diagram KPIs	6	Punctuality/Delay/Suspension/Window/Transfer/Compensation

JINGZHANG ON TIME · Overall Design Scope & Key Regions

Spine along the Jing-Zhang main line · stations per previous layout within 3 zones

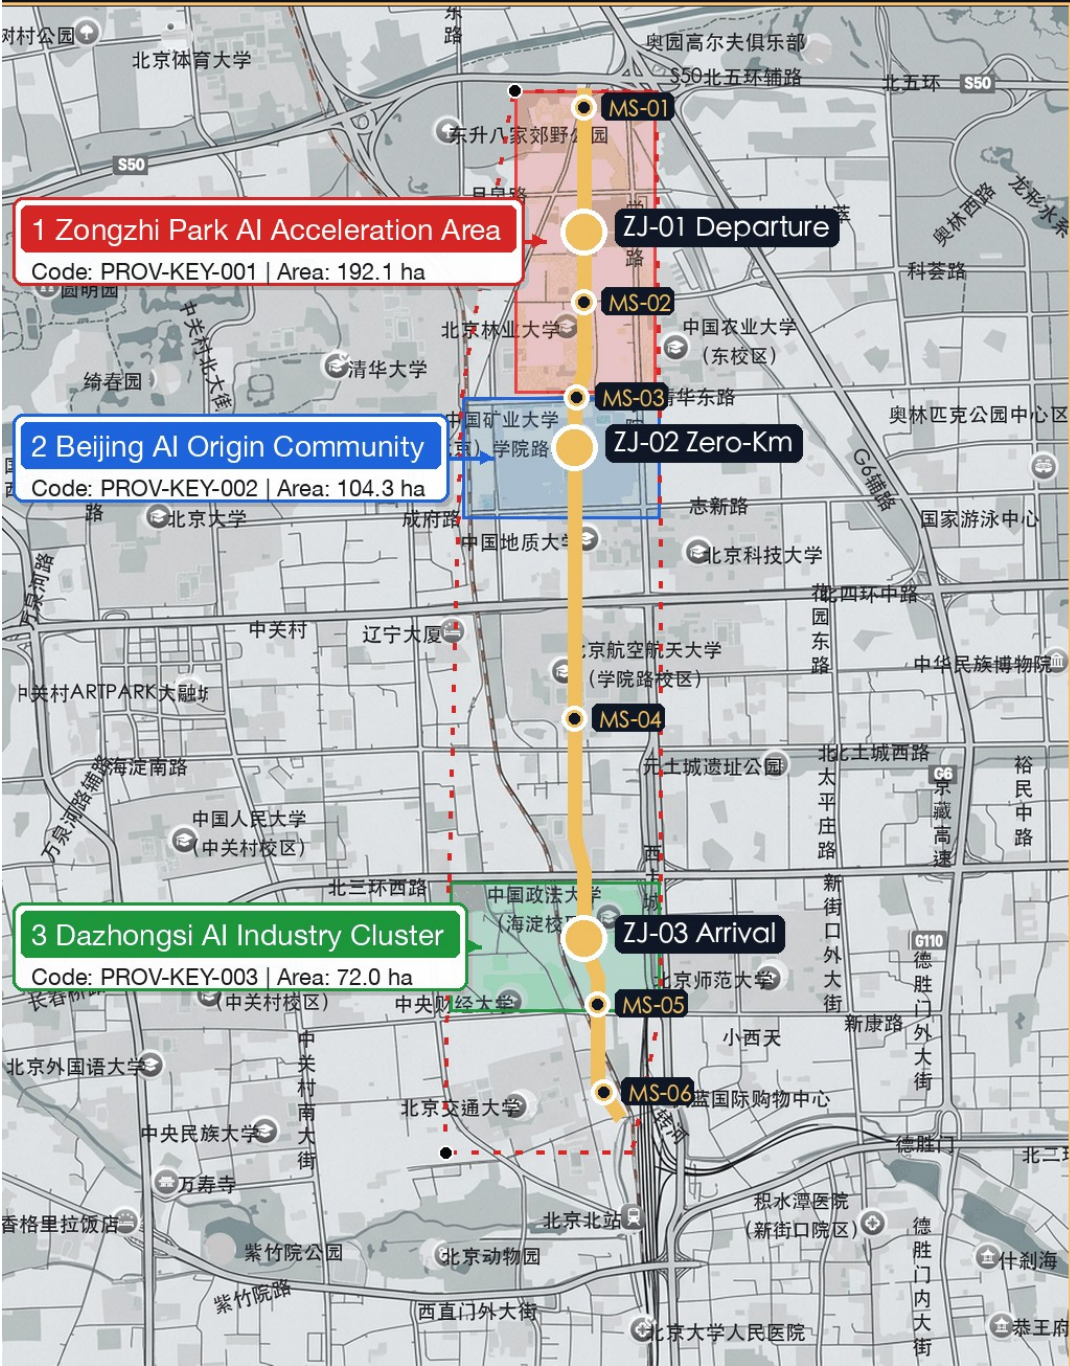

I. Overall Design Scope

- **Planning Scale:** Total area approx. 11.41 km² (EPSG:4548 projection verified area 11.41 km², avg. east-west width 1.2 km – 1.5 km)
- **Northernmost Node:** North 5th Ring Rd & Beijing-Zhangjiakou Railway Intersection (West of Jianting Bridge)
- **Southernmost Node:** Xizhimen North St & Xizhimen Outer St Intersection (North of Xizhimen Transport Hub)
- **Western Boundary:** Extends along Zhongguancun East Rd – Weigongcun Rd – Xueyuan South Rd & Dazhongsi East Rd
- **Eastern Boundary:** Extends along Xueyuan Rd – Xitucheng Rd – Xizhimen North St
- **Positioning & Function:** Centered on 1–2 km surrounding Railway Heritage Park, establishing a three-tier spatial control system of 'Research – Master Design – Key Areas'.

II. Detailed Scopes of 3 Key Regions

1 Zongzhi Park AI Acceleration Area

- Code: PROV-KEY-001 | Area: 192.1 ha (Verified: 192.92 ha)
- **Boundaries:** N. 5th Ring/Qinghe (N), Tsinghua E. Rd (S), Shuangqing Rd (W), G6 Expwy (E)

2 Beijing AI Origin Community

- Code: PROV-KEY-002 | Area: 104.3 ha (Verified: 104.32 ha)
- **Boundaries:** Tsinghua E. Rd (N), Chengfu Rd (S), Zhongguancun E. Rd (W), Xueyuan Rd (E)

3 Dazhongsi AI Industry Cluster

- Code: PROV-KEY-003 | Area: 72.0 ha (Verified: 72.05 ha)
- **Boundaries:** N. 3rd Ring W. Rd (N), Xueyuan S. Rd (S), Zhongguancun S. St (W), Xitucheng Rd (E)

III. Legend

- Overall Design Scope (11.41 km²)
- Focus Area 1: Zongzhi Park AI Acceleration Area (192.1 ha)
- Focus Area 2: Beijing AI Origin Community (104.3 ha)
- Focus Area 3: Dazhongsi AI Industry Cluster (72.0 ha)
- Start / End Node Points (Jianting Bridge / Xizhimen Bridge)
- Subway & Railway Transit Hubs
- Universities & Key Research

Overall design and key areas (EPSG:4548 · provisional)

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16

Narrative

The Urban Operating Diagram is a public spatio-temporal contract: machine-readable schema v1.0 with a zero-dependency checker (11 fixtures: 3 accepted, 8 rejected). Three-signal display; weekly window; gates G0–G4.

Scope

- Gates G0-G4: registration → baseline → trial → punctuality → release/suspend
- Three-signal: green=on time / amber=delayed / red=suspended
- Weekly window: Tue 06:00-12:00 line-wide maintenance

Key Indicators


v1.0 Schema	11 fixtures 3/7	8 Triggers	5 parties Community	5 funds Firewall
----------------	--------------------	---------------	------------------------	---------------------

Details

Mechanism	Core	Carrier
Urban Diagram	Spatio-temporal schedule registration	schema + checker
Paired testing	AI on/off equivalence gap; denominators include failures	unknown until pilot
Transfer	Handovers follow transfer times; human-signed receipts	Receipts (KPI-5)
Community	Authority+operator+university+veto+audit	Charter
Fund firewall	Five funds; three ledgers before G3	Charter

运行图广场 · 标志性图件概念（斜线运行图）

城市运行图（Urban Operating Diagram）：服务时空轨迹 = 斜线；站点 = 节点；天窗 = 垂直线段

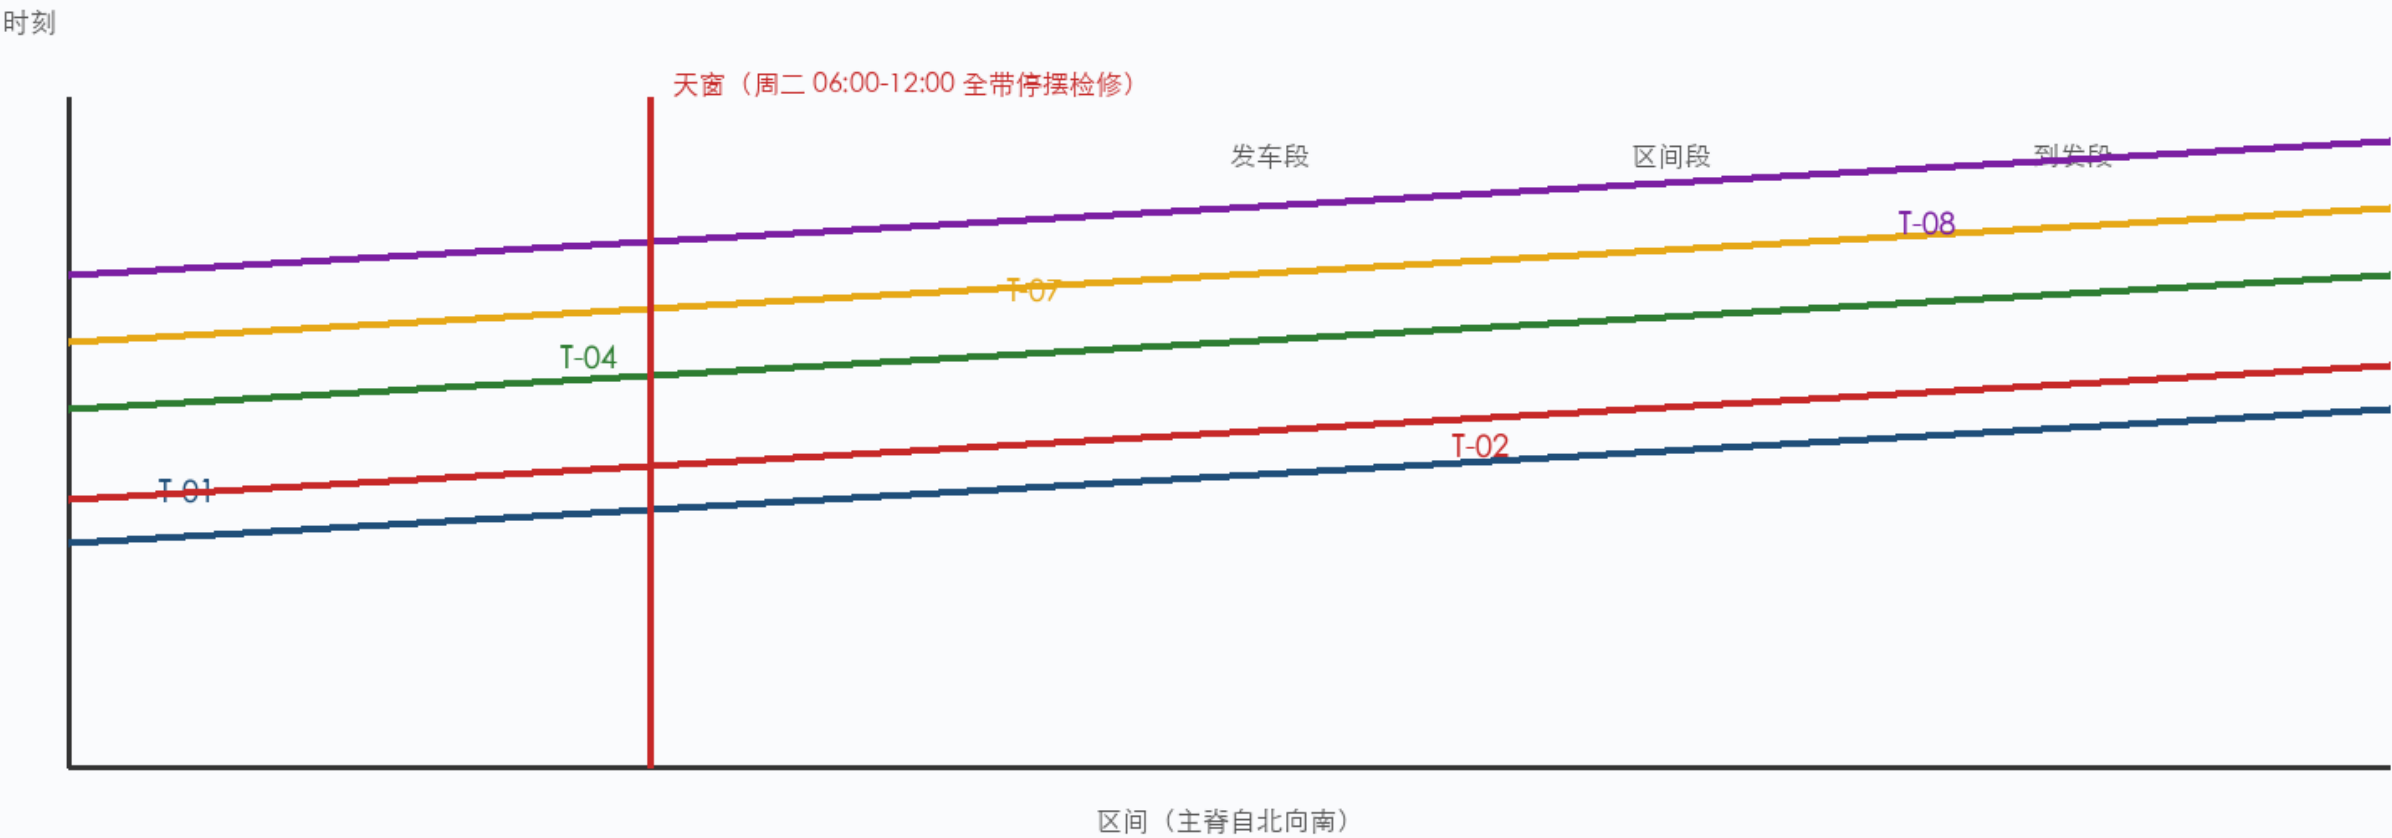

双重用法：

白天=信息界面（服务时刻/状态/换乘）；夜间=状态光带（绿/黄/红投影）· 地面铺装斜线=运行图轨迹· 广场同时是公共坐席与活动场地

Diagram Plaza: operating-diagram lines as public surface

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16

Narrative

Three stations carry the verify-translate-adopt chain in railway departure semantics. Each key area provides a 100-metre window with four-state sections; the five-band order is fixed and unchanged when AI is off.

Scope

- ZJ-01 Departure Yard (192.1 ha): marshalling + paired testing
- ZJ-02 Zero-Kilometre (104.3 ha): Qinghuayuan reuse = Timetable Hall
- ZJ-03 Arrival-Transfer (72.0 ha): plaza kit + yearbook hall

Key Indicators

192.1 ha ZJ-01	104.3 ha ZJ-02	72.0 ha ZJ-03	3 Windows	4 states Sections
-------------------	-------------------	------------------	--------------	----------------------

Details

Area	Size	Role	Design	Anchors
Zhongzhi	192.1 ha	Departure	Marshalling, lab	T-01 + SP
Origin	104.3 ha	Zero-Km	Reuse, stitching	T-04 + T-07
Dazhongsi	72.0 ha	Arrival	TOD, plaza kit	T-02 + T-08

WP-08 · ZJ-01_发车场站（ZJ-01）平面布置示意



底图占位 —— 正式平面基于原始文件总体设计底图（EPSG:4548）

与五道口/清华东路西口轨道站点关系：验证整备库一站前广场—清河界面三级；服务链首站（验证发车段）

点位为概念布置（可移动样段先行） · 正式平面图基于原始底图落位

ZJ-02· 原点零公里站 · 100米窗口断面四态 —— 清华园车站旧址前广场（时刻表大厅前）

断面五带（自公共侧→设施侧）



旧址界面—时刻表带（信息板）—无障碍带—慢行带—人工服务带（首班车人工岗）—信号柱

四态表达（含 AI 撤除后空间状态）



AI OFF 底线：
五带次序不因 AI 状态改变；停运/检修时时刻表带转为人工信息板、信号柱转白灯，无障碍/慢行/人工服务带原样运行

概念断面示意（表达层）· 正式图件基于原始底图出图 · provisional 边界声明

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16

Narrative

Eight scenario cards serve the operating-diagram loop only. The 90-day first service is the minimal implementation unit; suspension is a qualified outcome (falsify-first).

Scope

- T-01 Registration: no timetable, no departure
- T-03 Window Plaza: weekly fixed maintenance window
- T-05 Compensation: delay opens compensation channels
- T-07 Pilot Cabin: full 90-day first-service loop

Key Indicators

8 Cards	7 Profiles	90 days Pilot	405-820k Cost (BOM)	6 Projects
------------	---------------	------------------	------------------------	---------------

Details

ID	Scenario	Space	Tier	TRL	Mechanism
T-01	Registration	stations	L1	7-8	No timetable, no departure
T-02	Punctuality Board	halls	L1	N/A	Monthly punctuality
T-03	Window Plaza	spine	L1	N/A	Weekly window
T-04	Transfer Desk	joints	L2	6-7	Transfer times
T-05	Compensation	stations	L1	N/A	Compensation channels
T-06	Signal Post	spine	L1	N/A	Status code
T-07	Pilot Cabin	Origin	L2	5-6	90-day loop
T-08	Yearbook Hall	Dazhongsi	L1	N/A	Annual review

90-day First Service

D0-30 registration and samples → D31-60 trial (paired testing + first window) → D61-90 punctuality assessment and G3 decision. Resource release tied to gates (10/25/25/25/15%); cost estimate 405-820k RMB (BOM basis, not a budget commitment).

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16



Narrative

TOD stitching at three stations plus the five-band spine and 15 gap-stitching units. One axis, two rivers: heritage spine plus Qinghe/Xiaoyuehe; conceptual green patches 2 units, 0.199 km².

Scope

- TOD 500m union 20.6% (synthetic); five-band slow mobility
- Transfer protocol: human-signed receipts (KPI-5)
- Edge micro-stations (reversible plug-rails)
- 9.5 km wind corridor (est. 0.8-1.5°C, synthetic)

Key Indicators

20.6% TOD 500m	85.6% Green 300m	15 Gaps	5 bands Spine	pending Density
-------------------	---------------------	------------	------------------	--------------------

Details

Indicator	Value	Basis
TOD 500m union	20.6%	EPSG:4548, synthetic
Green 300m	85.6%	EPSG:4548, synthetic
Greenway gaps	15	Measured basis
Spine bands	Fixed	Five-band order
Density	pending	Official census

主脊断面五带 · 9.5km 运行图正线（一脊）

五带固定次序（自西向东，AI 撤除后不变）：时刻表带 — 无障碍带 — 慢行带 — 人工服务带 — 信号柱序列



信号柱每 1.5km 一处（SP-01~07），三站广场加密；天窗时段转白灯检修模式

断点缝合（沿用 v9.8 实测：现状约 15 处断点，12 处重点社区与高校连通待补）
缝合单元 = 无障碍坡道+信号柱+时刻表信息点三件套；缝合完成度纳入换乘衔接准时率 KPI-5 的基线

EPSG:4548 实测口径沿用 · provisional 边界声明

Spine five-band section and signal posts

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16

Narrative

Six diagram KPIs source from the diagram log; three-way separation with no disguise before the pilot. Standard coverage 9/9; compliance separation.

Scope

- KPI-1 Punctuality: on-time / total
- KPI-4 Window execution; KPI-6 Compensation fulfilment
- Compliance: GenAI Art. 14/15, Barrier-Free Art. 39, 2020-45

- 10 risks + 8 hard-stop triggers

Key Indicators

6 KPIs	9/9 Standards	3 Statutes	10 Risks	8 Triggers
-----------	------------------	---------------	-------------	---------------

Details

Standard	Coverage	Status
PROJECT-OFFICIAL-ANNOUNCEMENT	1.3/1.4/1.5	responded
AGENT-OPEN-CALL-TASKBOOK	Orientations	responded
MOHURD-URBAN-DESIGN-MEASURES	Method	responded
MOHURD-CONTROL-DETAILED-PLANNING	Regulatory design	responded
MNR-LAND-USE-CLASSIFICATION	0802/05/1401/0702	responded
GENERATIVE-AI-MEASURES	Art. 14/15	responded
BARRIER-FREE-LAW	Art. 39	responded
ELDERLY-2020-45	Parallel policy	responded

Compliance Separation

Statutory minimums (GenAI Art. 14/15, Barrier-Free Art. 39, 2020-45) are never waived by design recommendation; self-set standards are labelled (self-set); each row states its spatial-operational consequence.

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16



Narrative

All claims are reversible: provisional boundaries trigger whole-package recalculation; census/controls/network stay unknown; pilots require tabletop acceptance + authorization + five-step rollback.

Scope

- 10 risks registered
- 8 hard-stop triggers; rollback pack of nine
- COMMUNITY-DISPLAY-ONLY; no administrative conclusions

Key Indicators


provisional All marked	unknown No disguise	CDO Licence	1.64 en/zh
---------------------------	------------------------	----------------	---------------

Details

Boundary	Handling	Trigger
Official polygon	provisional	Whole recalculation
Building census	unknown	On release
FAR controls	unknown	On release
Road network	concept line	On release

JINGZHANG ON TIME · Overall Design Scope & Key Regions

Spine along the Jing-Zhang main line · stations per previous layout within 3 zones

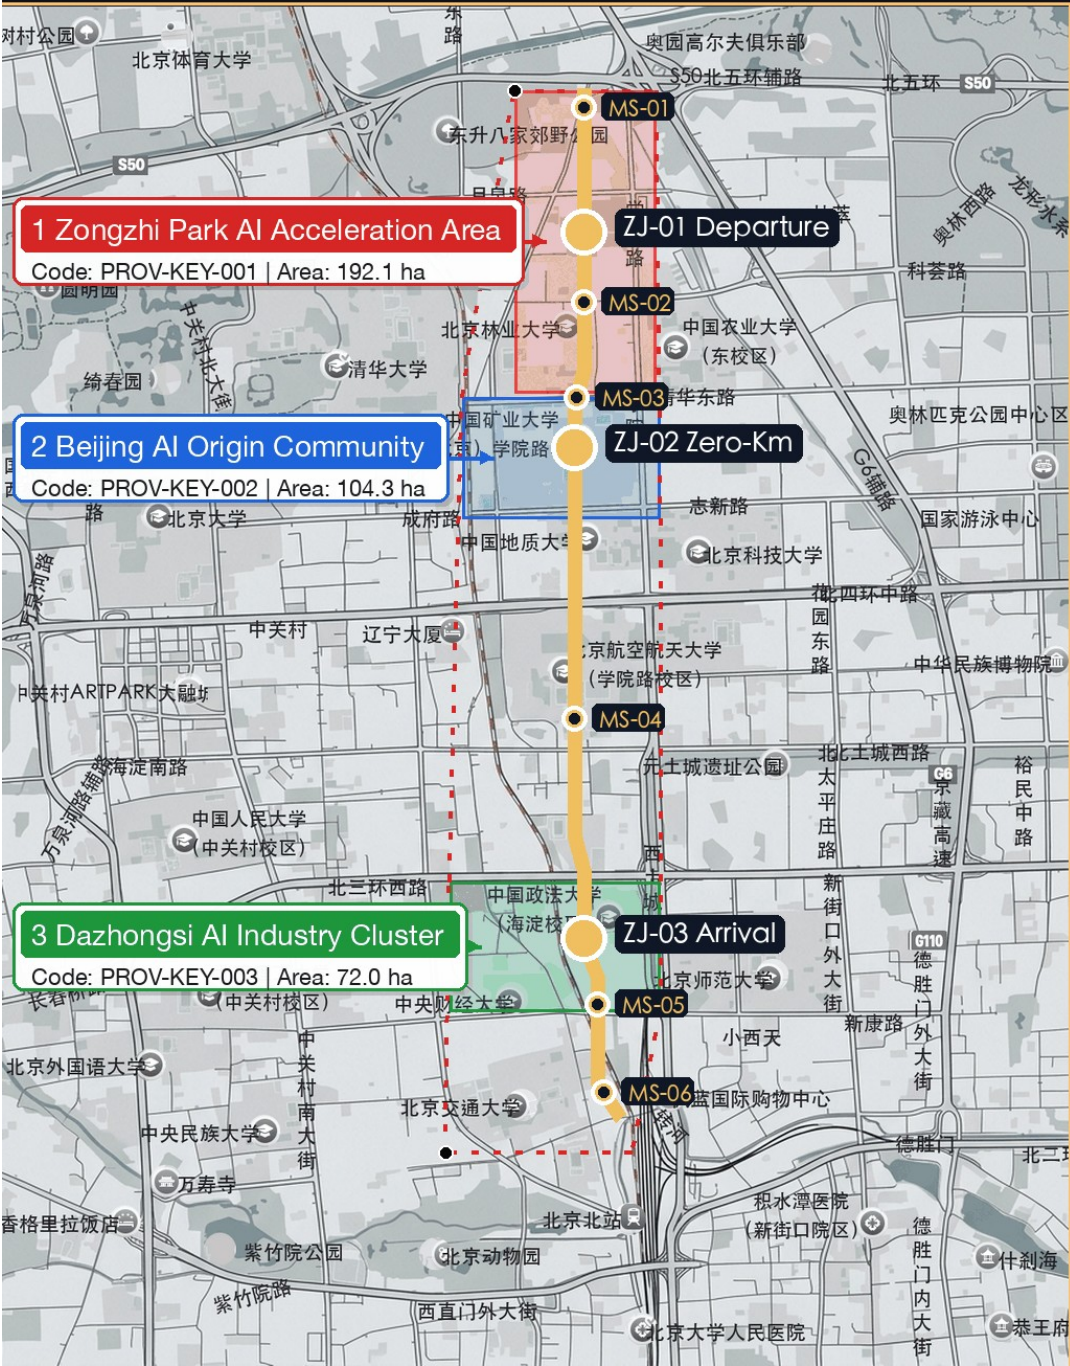

I. Overall Design Scope

- **Planning Scale:** Total area approx. 11.41 km² (EPSG:4548 projection verified area 11.41 km², avg. east-west width 1.2 km – 1.5 km)
- **Northernmost Node:** North 5th Ring Rd & Beijing-Zhangjiakou Railway Intersection (West of Jianting Bridge)
- **Southernmost Node:** Xizhimen North St & Xizhimen Outer St Intersection (North of Xizhimen Transport Hub)
- **Western Boundary:** Extends along Zhongguancun East Rd – Weigongcun Rd – Xueyuan South Rd & Dazhongsi East Rd
- **Eastern Boundary:** Extends along Xueyuan Rd – Xitucheng Rd – Xizhimen North St
- **Positioning & Function:** Centered on 1–2 km surrounding Railway Heritage Park, establishing a three-tier spatial control system of 'Research – Master Design – Key Areas'.

II. Detailed Scopes of 3 Key Regions

1 Zongzhi Park AI Acceleration Area

- Code: PROV-KEY-001 | Area: 192.1 ha (Verified: 192.92 ha)
- **Boundaries:** N. 5th Ring/Qinghe (N), Tsinghua E. Rd (S), Shuangqing Rd (W), G6 Expwy (E)

2 Beijing AI Origin Community

- Code: PROV-KEY-002 | Area: 104.3 ha (Verified: 104.32 ha)
- **Boundaries:** Tsinghua E. Rd (N), Chengfu Rd (S), Zhongguancun E. Rd (W), Xueyuan Rd (E)

3 Dazhongsi AI Industry Cluster

- Code: PROV-KEY-003 | Area: 72.0 ha (Verified: 72.05 ha)
- **Boundaries:** N. 3rd Ring W. Rd (N), Xueyuan S. Rd (S), Zhongguancun S. St (W), Xitucheng Rd (E)

III. Legend

- Overall Design Scope (11.41 km²)
- Focus Area 1: Zongzhi Park AI Acceleration Area (192.1 ha)
- Focus Area 2: Beijing AI Origin Community (104.3 ha)
- Focus Area 3: Dazhongsi AI Industry Cluster (72.0 ha)
- Start / End Node Points (Jianting Bridge / Xizhimen Bridge)
- Subway & Railway Transit Hubs
- Universities & Key Research

Overall design and key areas (provisional)

Note: A3 draft. Final PDF A3 full (420×297mm). Drawings generated on provisional constraint boundaries; not statutory red lines. v6.0 | 2026-08-16