

JING-ZHANG OPEN BELT

Bring the nine-kilometre park back into commuting, public services, and evening life.






CONCEPT VIEW / NOT EVIDENCE OF EXISTING CONDITIONS

02

FROM DISTRICT TO COURTYARD

Nine kilometres, eight hundred metres and one courtyard on the same real fabric

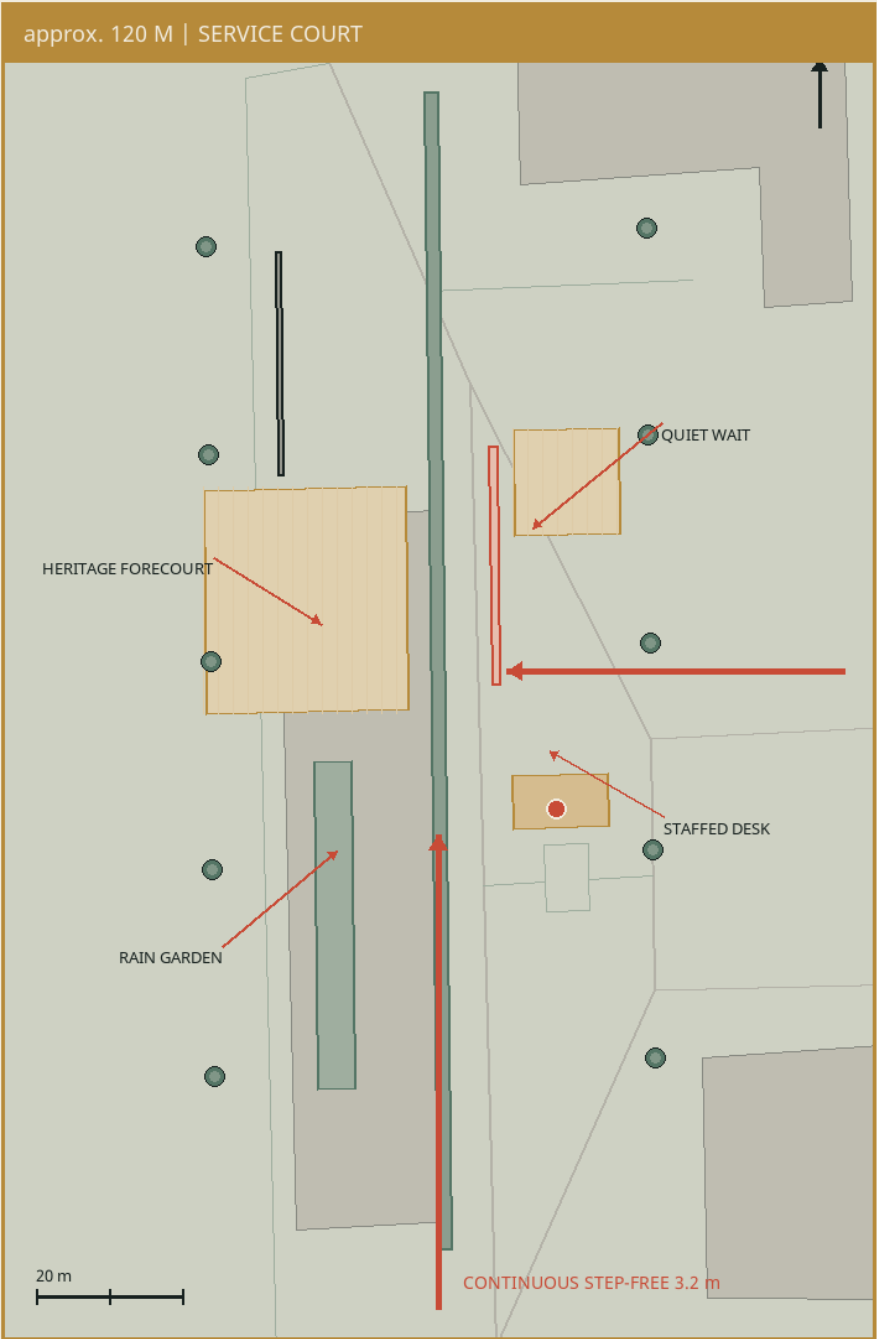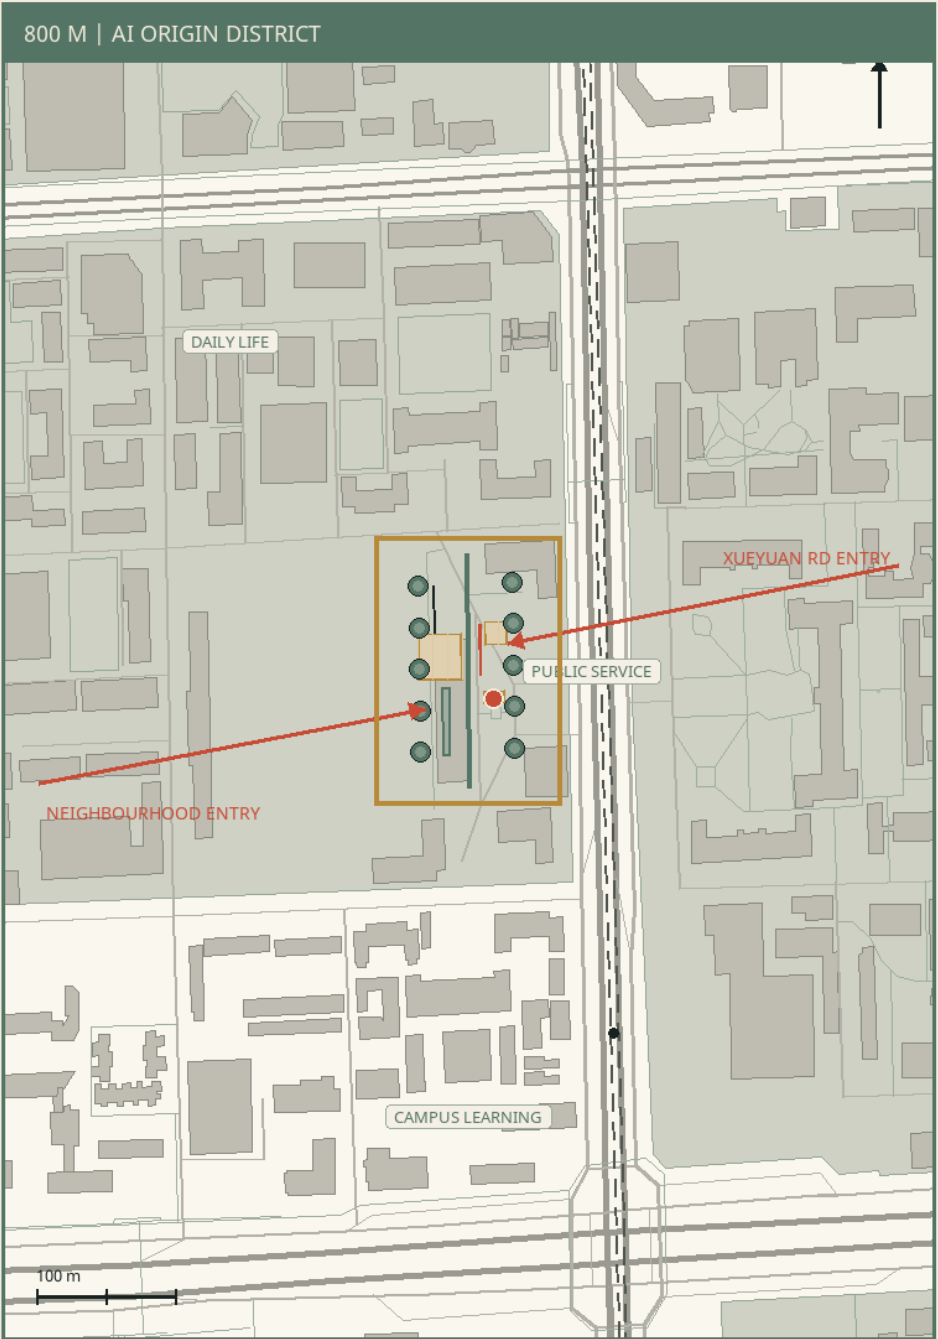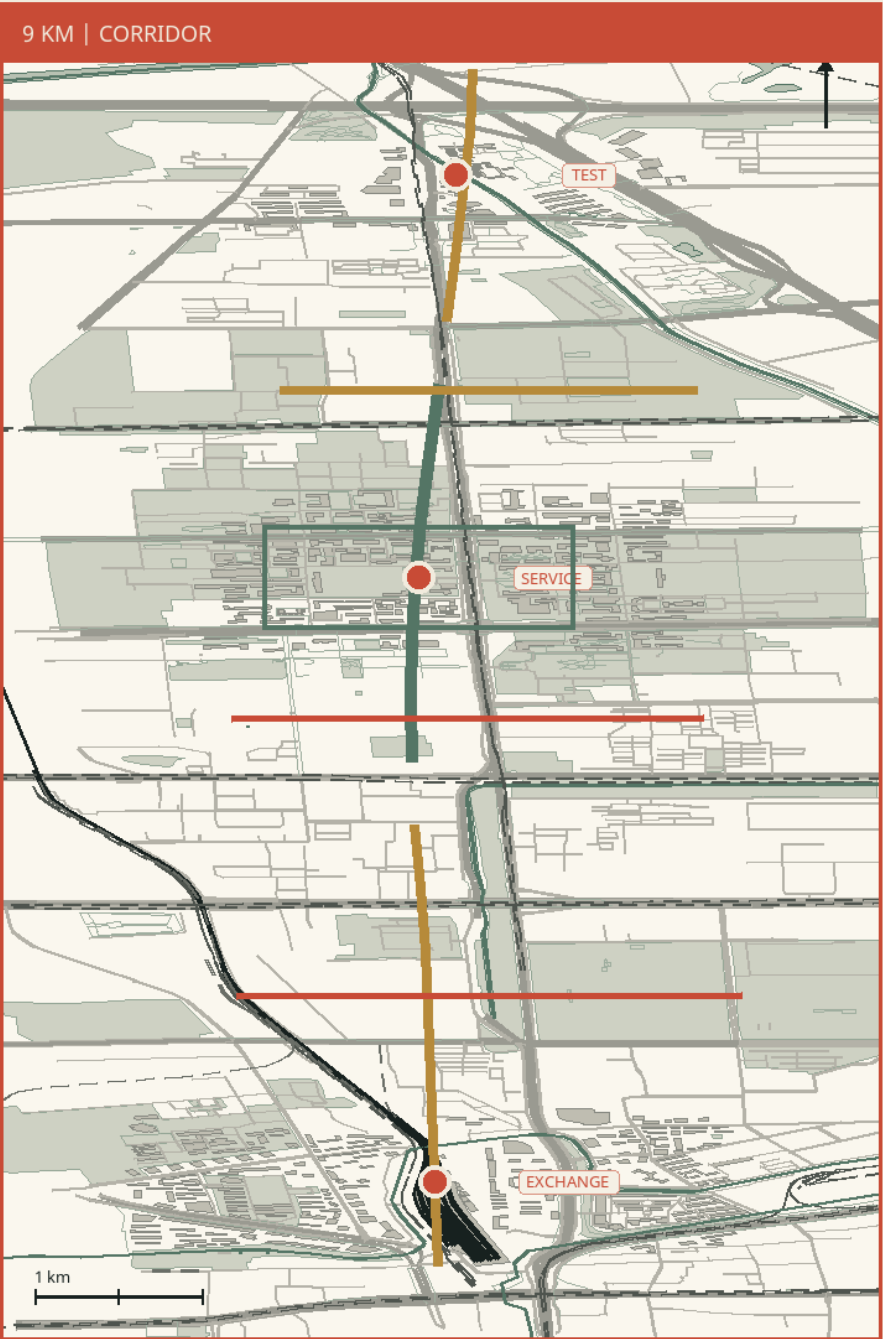

OSM context only | Concept boundaries require survey, ownership and approvals

THREE SCALES | ALL GEOMETRY PROVISIONAL

BUILT

Phase I is open and retains its published definition.

UNDER WAY

Phase II remains construction, not existing condition.


VERIFY

Boundaries, gates, levels, and utilities need field checks.

09

WALK IT BEFORE OPENING

Four public checks placed in the real Zhichun Road–Dazhongsi context

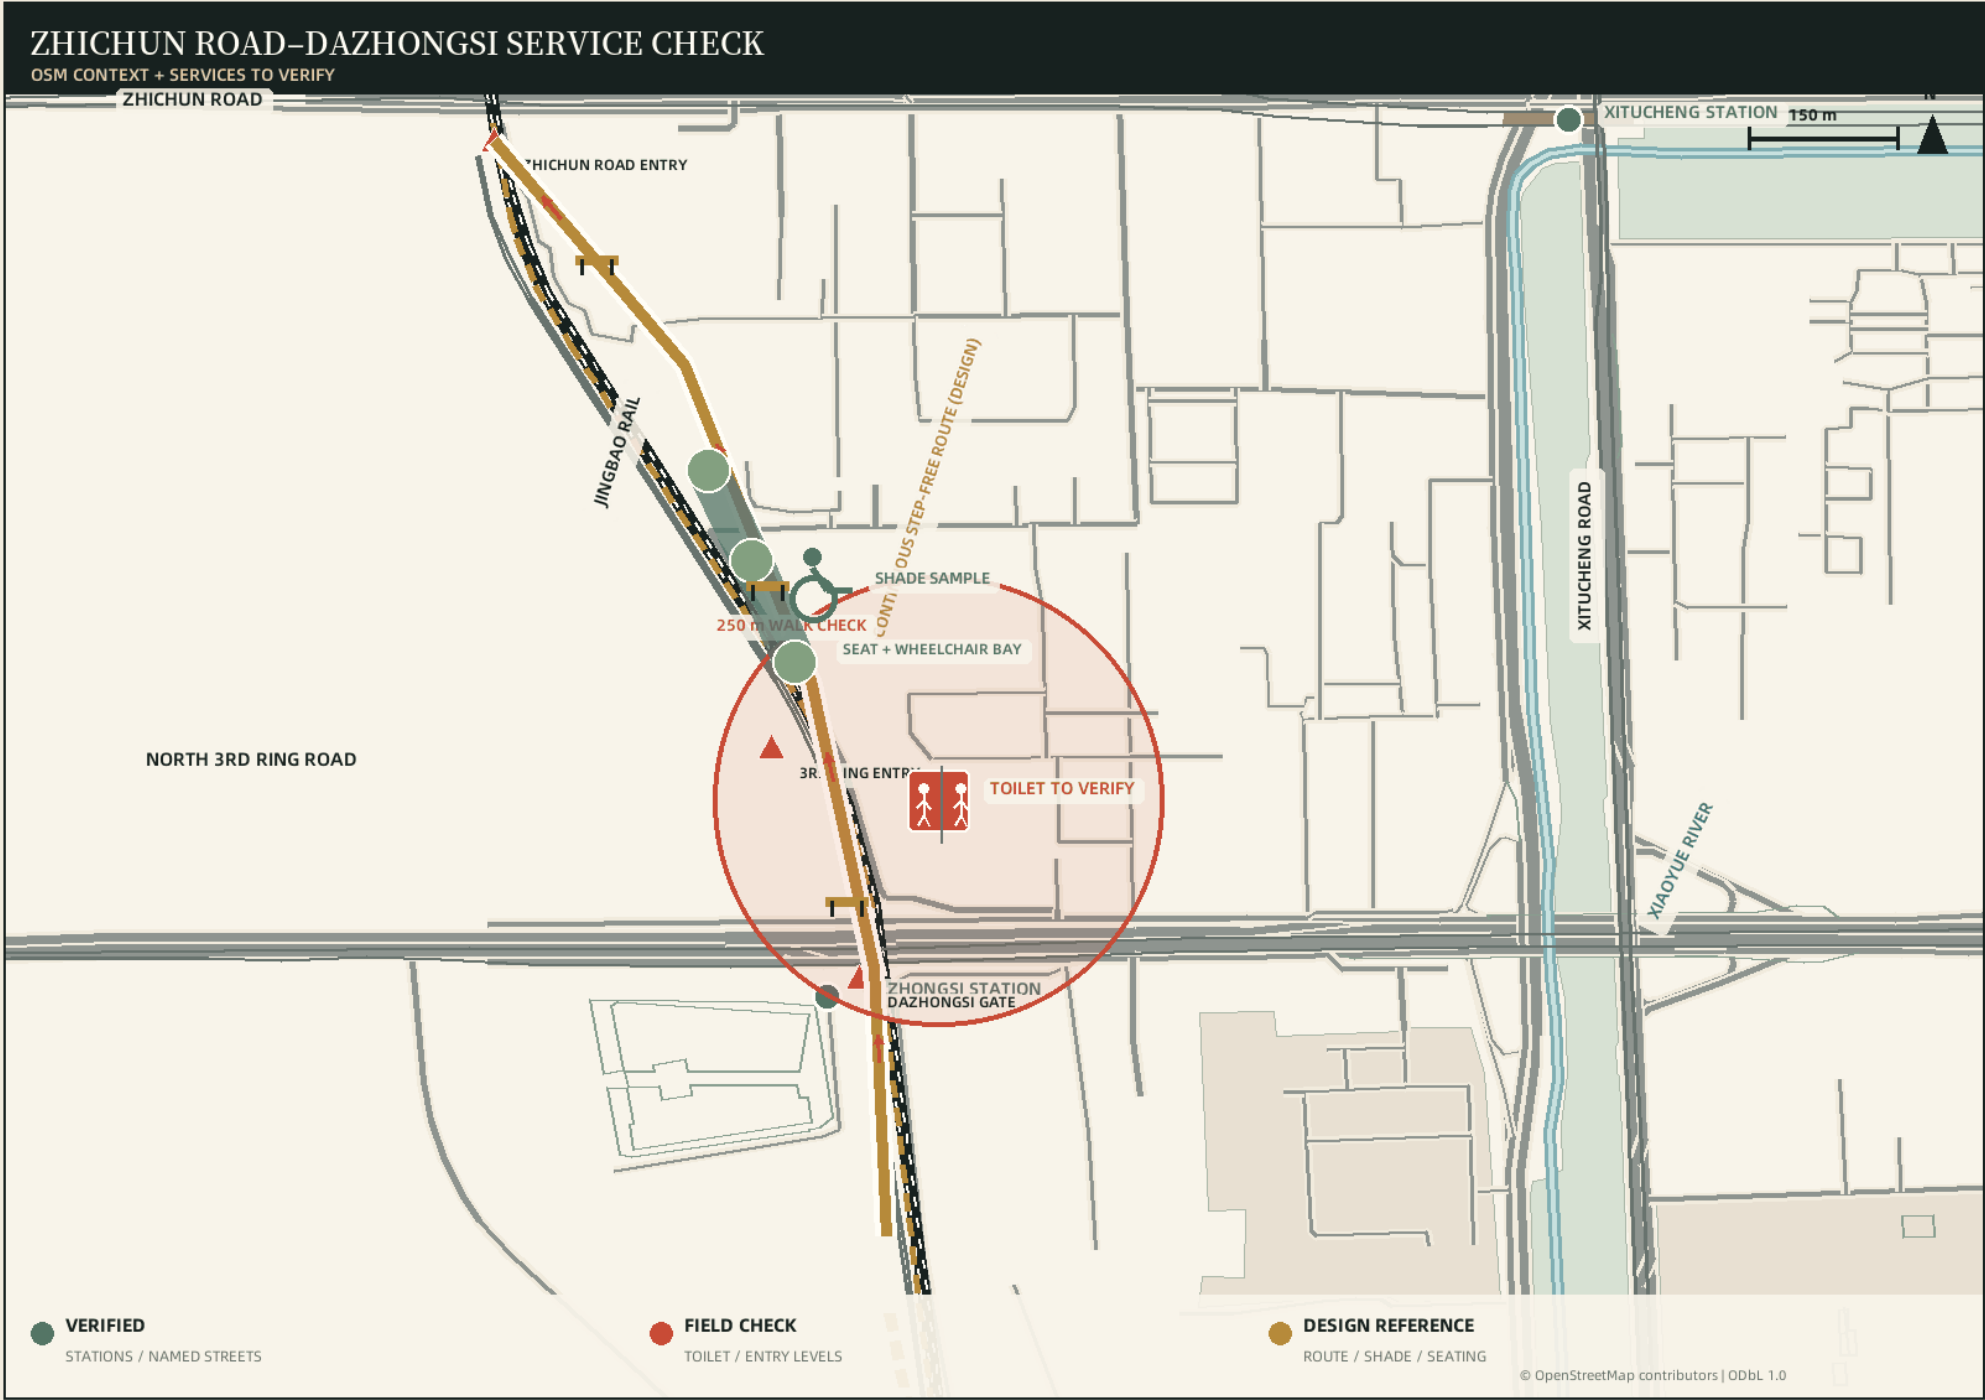

STEP-FREE

CONTINUOUS ACCESSIBLE ROUTE

Check each gate at Dazhongsi, 3rd Ring Road and Zhichun Road

≤250 m

WALK TO A TOILET

GB 51192-2016 advises this distance; verify the point and walked route

>80%*

SHADE ON MAIN + SECONDARY PATHS

Beijing park-guidance reference target, not a statutory value

20% TO 30%

SEATING / WHEELCHAIR BAYS ≥10%

Place bays beside backrest and armrest seats with a clear care sightline

MAP CONTEXT IS VERIFIED; LEVELS, TOILET AND SERVICES STILL NEED FIELD CHECKS

PUBLIC SERVICE AUDIT | ZHICHUN ROAD–DAZHONGSI

OPEN-CITY-AI / HAIDIAN



FORMER QINGHUAYUAN STATION / 2024 / CC BY-SA 4.0

0 STEPS

Verify one continuous accessible route point by point

≤250 m

Check toilet location and opening hours

>80%*

Shade is a reference target; measure in July

10%+

Count wheelchair spaces beside seats on site

01

READ THE NINE KILOMETRES





Real context, public project status and three breaks on one drawing

BUILT

UNDER CONSTRUCTION

PROPOSAL

APPROVAL REQUIRED

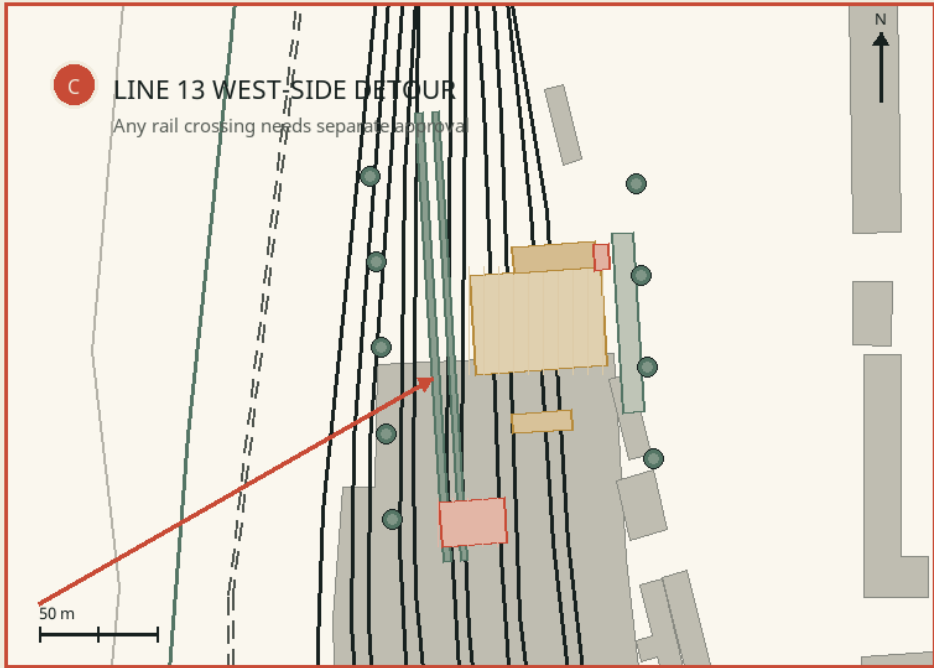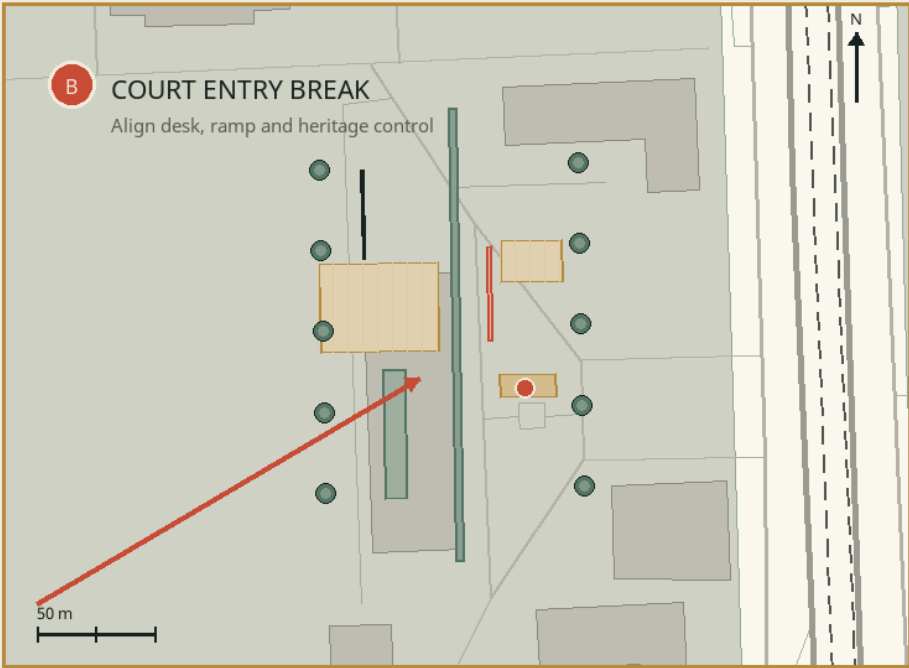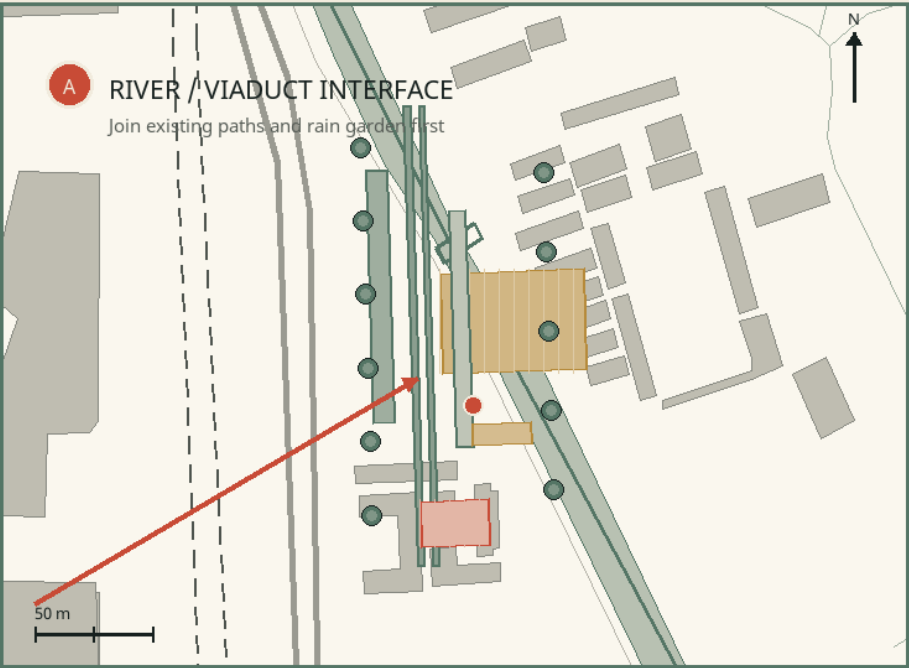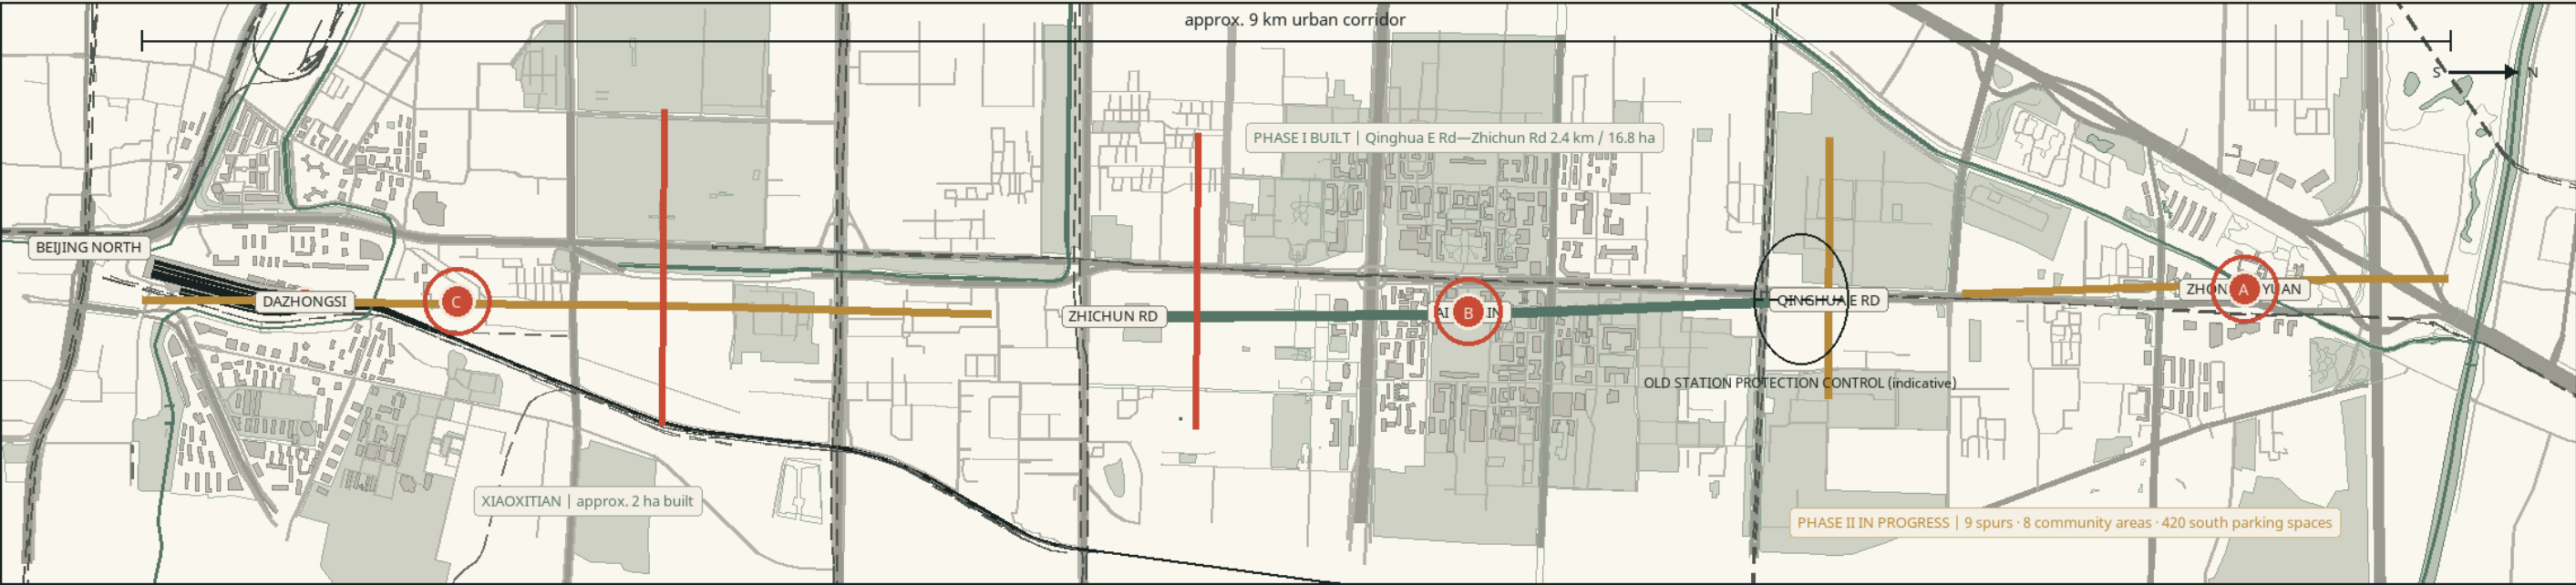

OSM context only | Concept boundaries require survey, ownership and approvals

STATUS CUT-OFF 2026-08 | PROVISIONAL / CONTEXT ONLY

BUILT



Retain original project status

PROPOSED


Five interfaces only

REVIEW


Rail, heritage, water

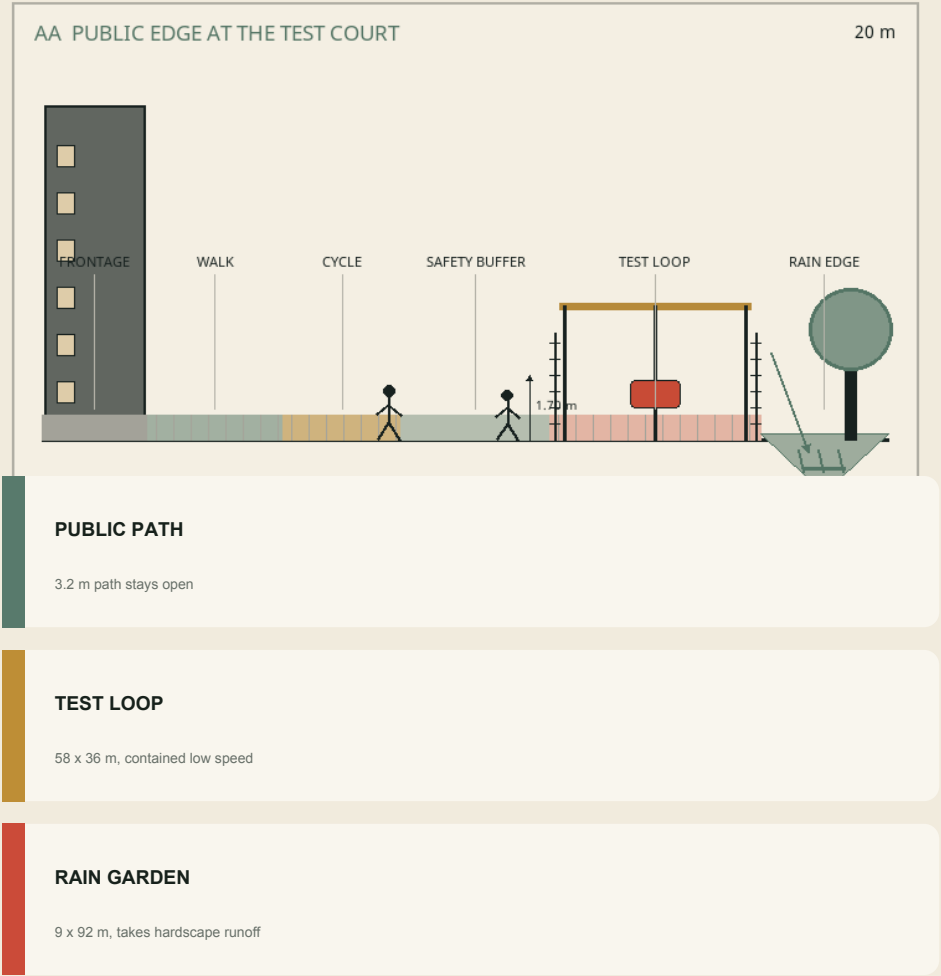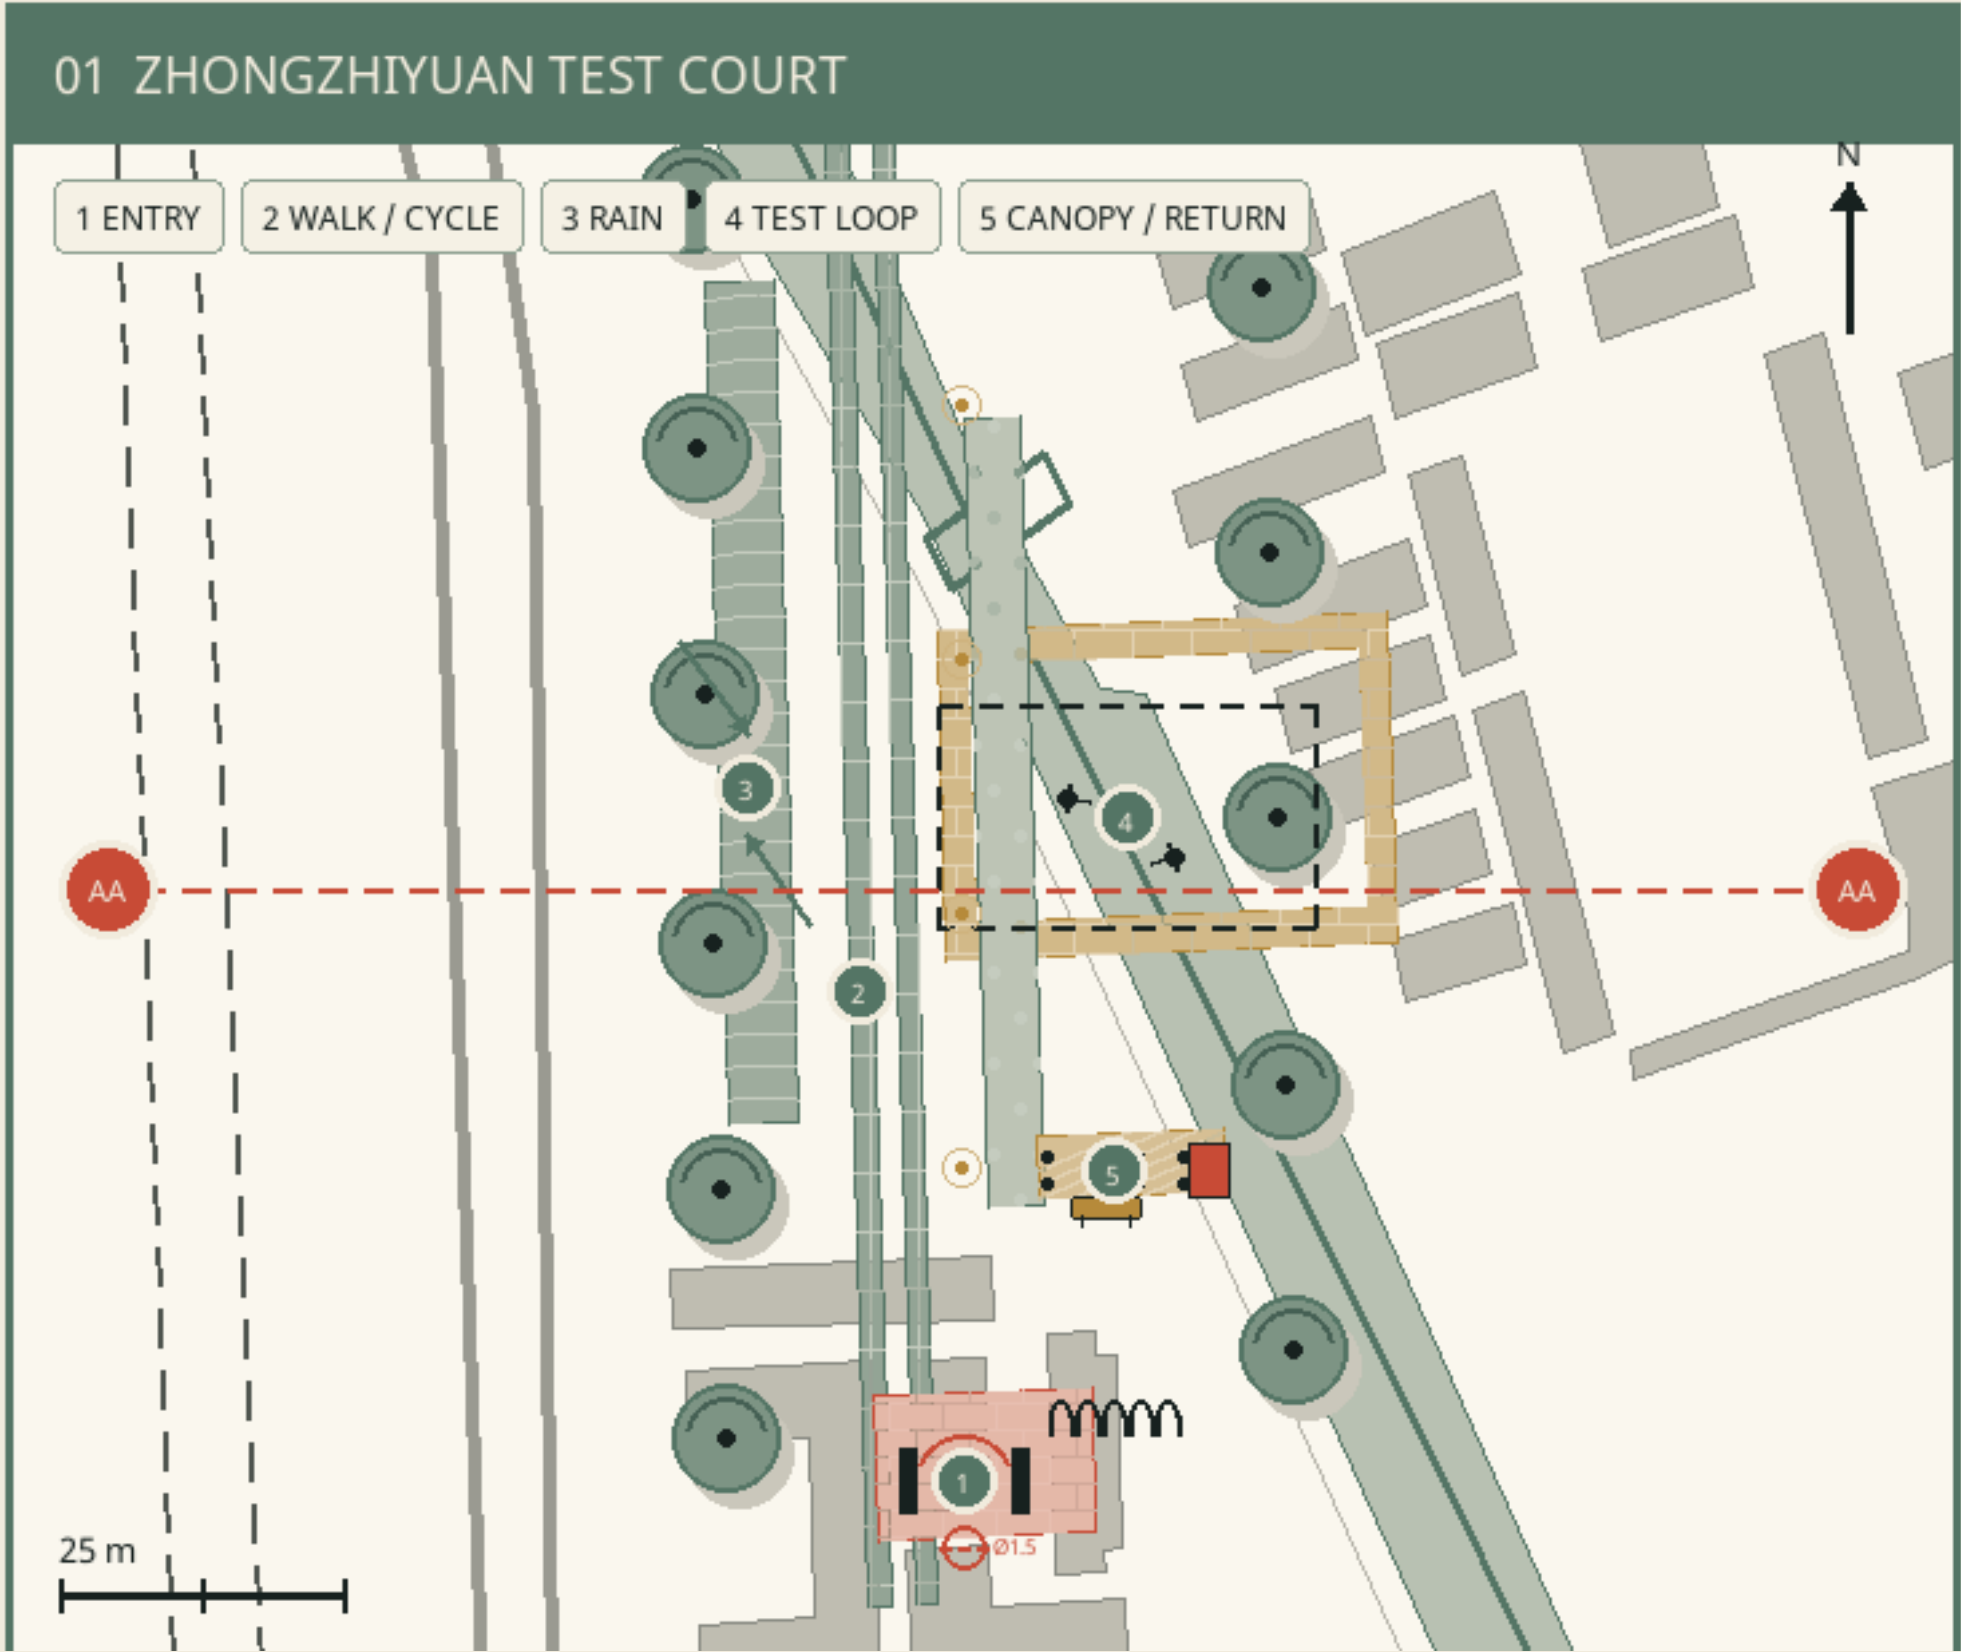

02 AI ORIGIN SERVICE COURT

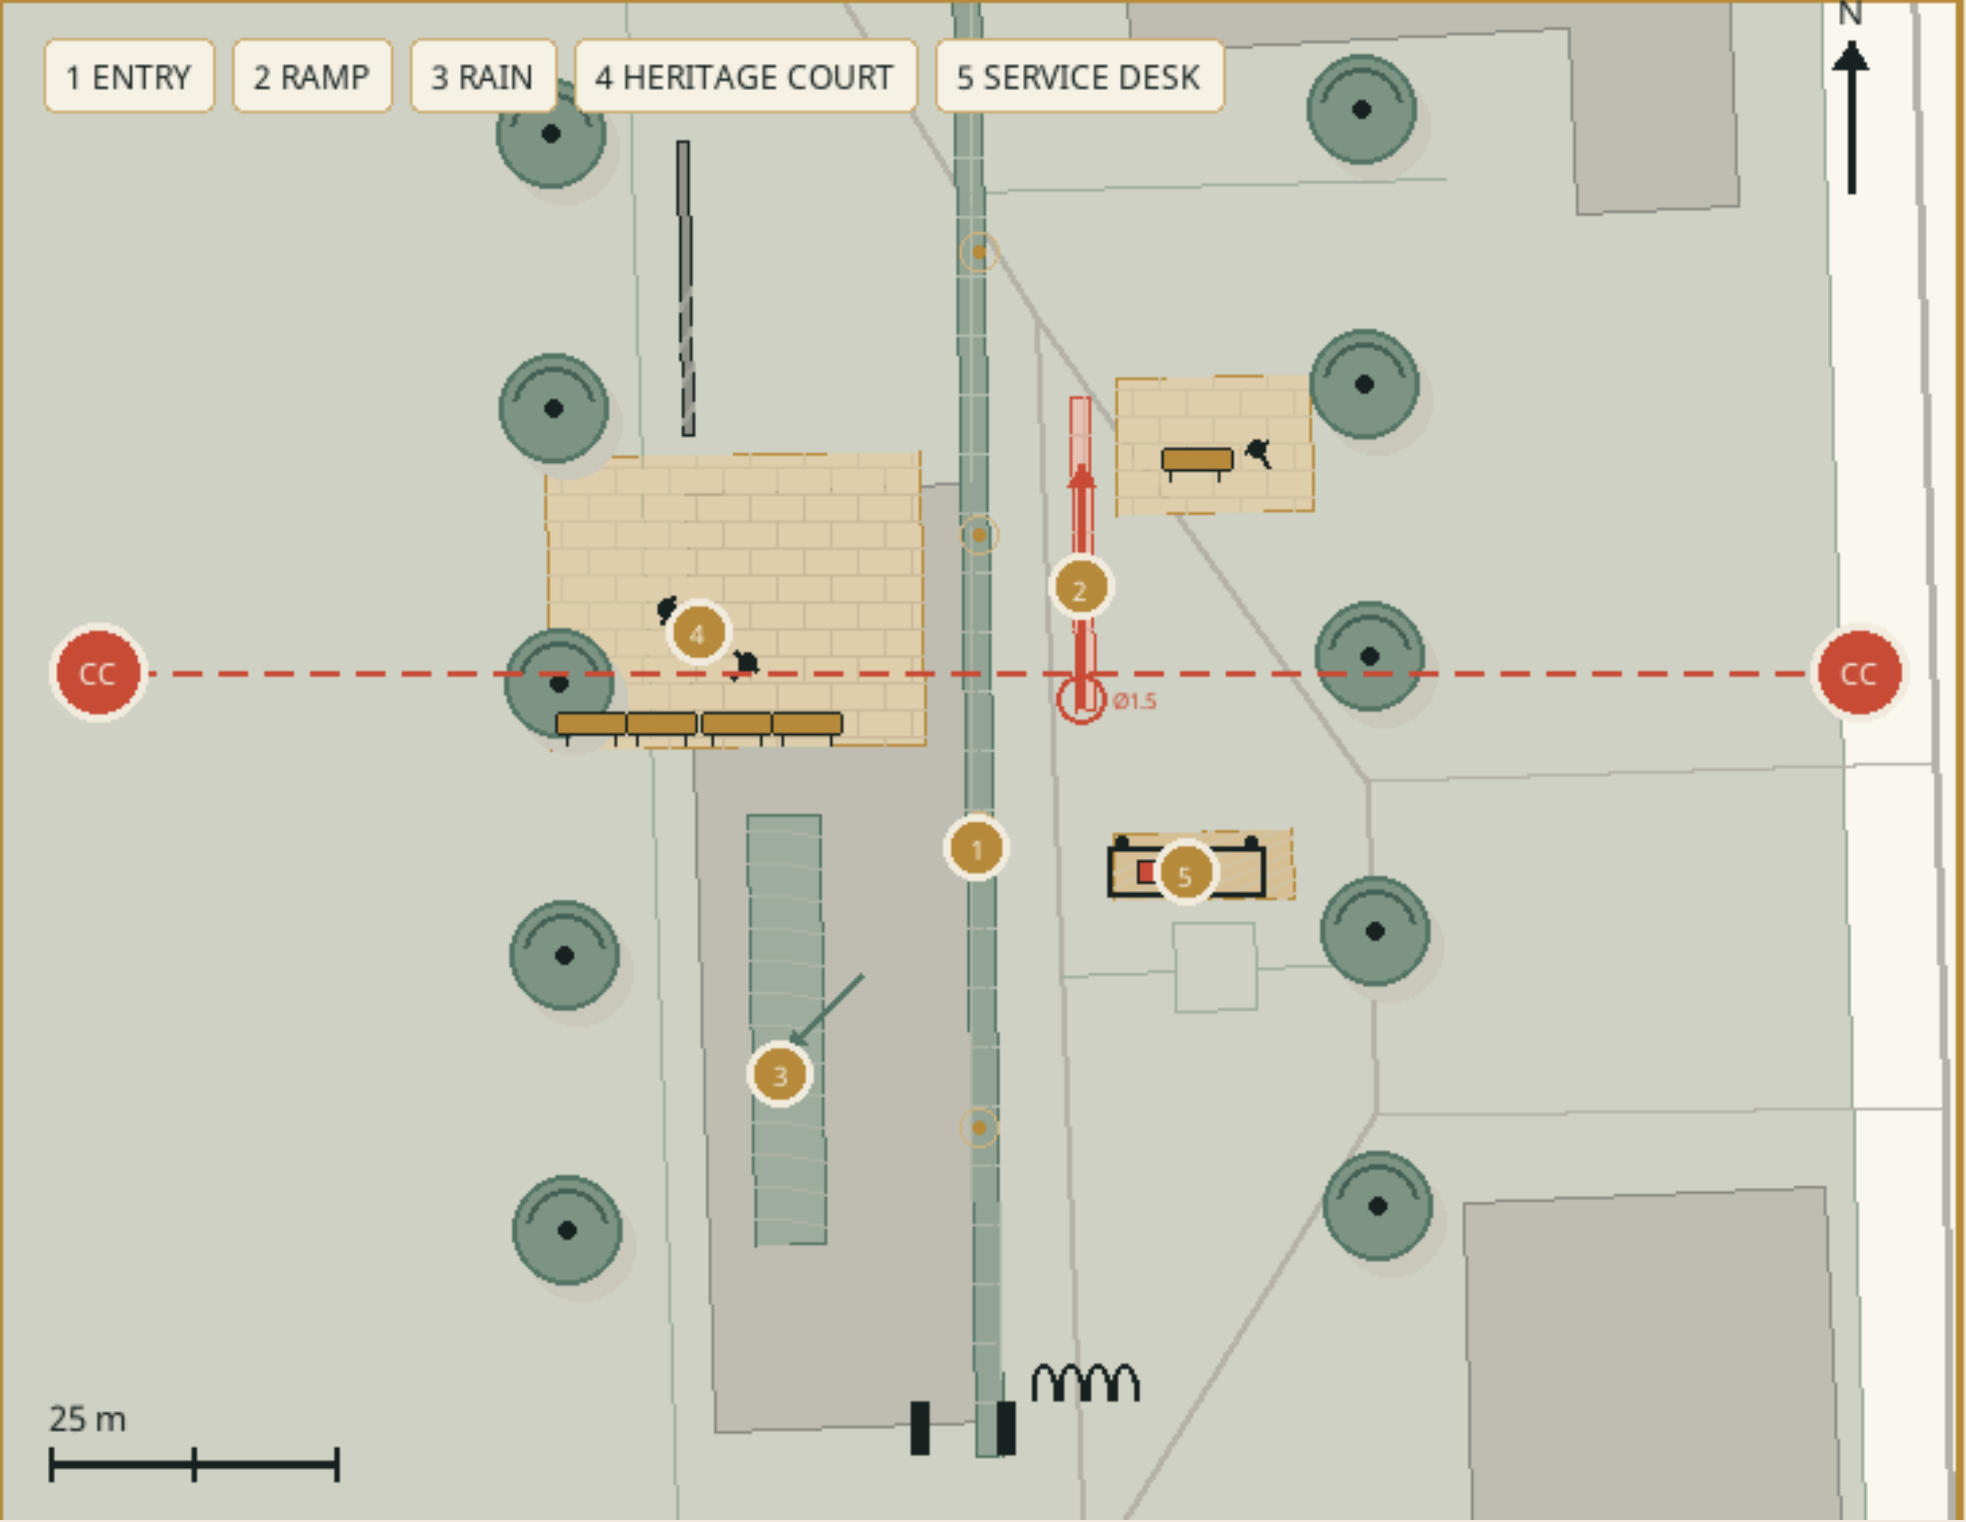

CC OLD STATION FORECOURT 18 m

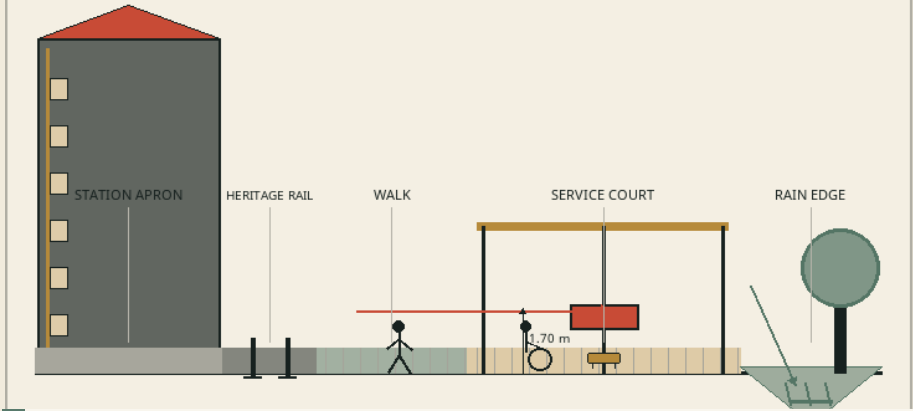

STAFFED DESK

People see staff first


RAMP

2 m clear route to the desk

OLD STATION

Realign when heritage GIS arrives


03 DAZHONGSI EXCHANGE COURT

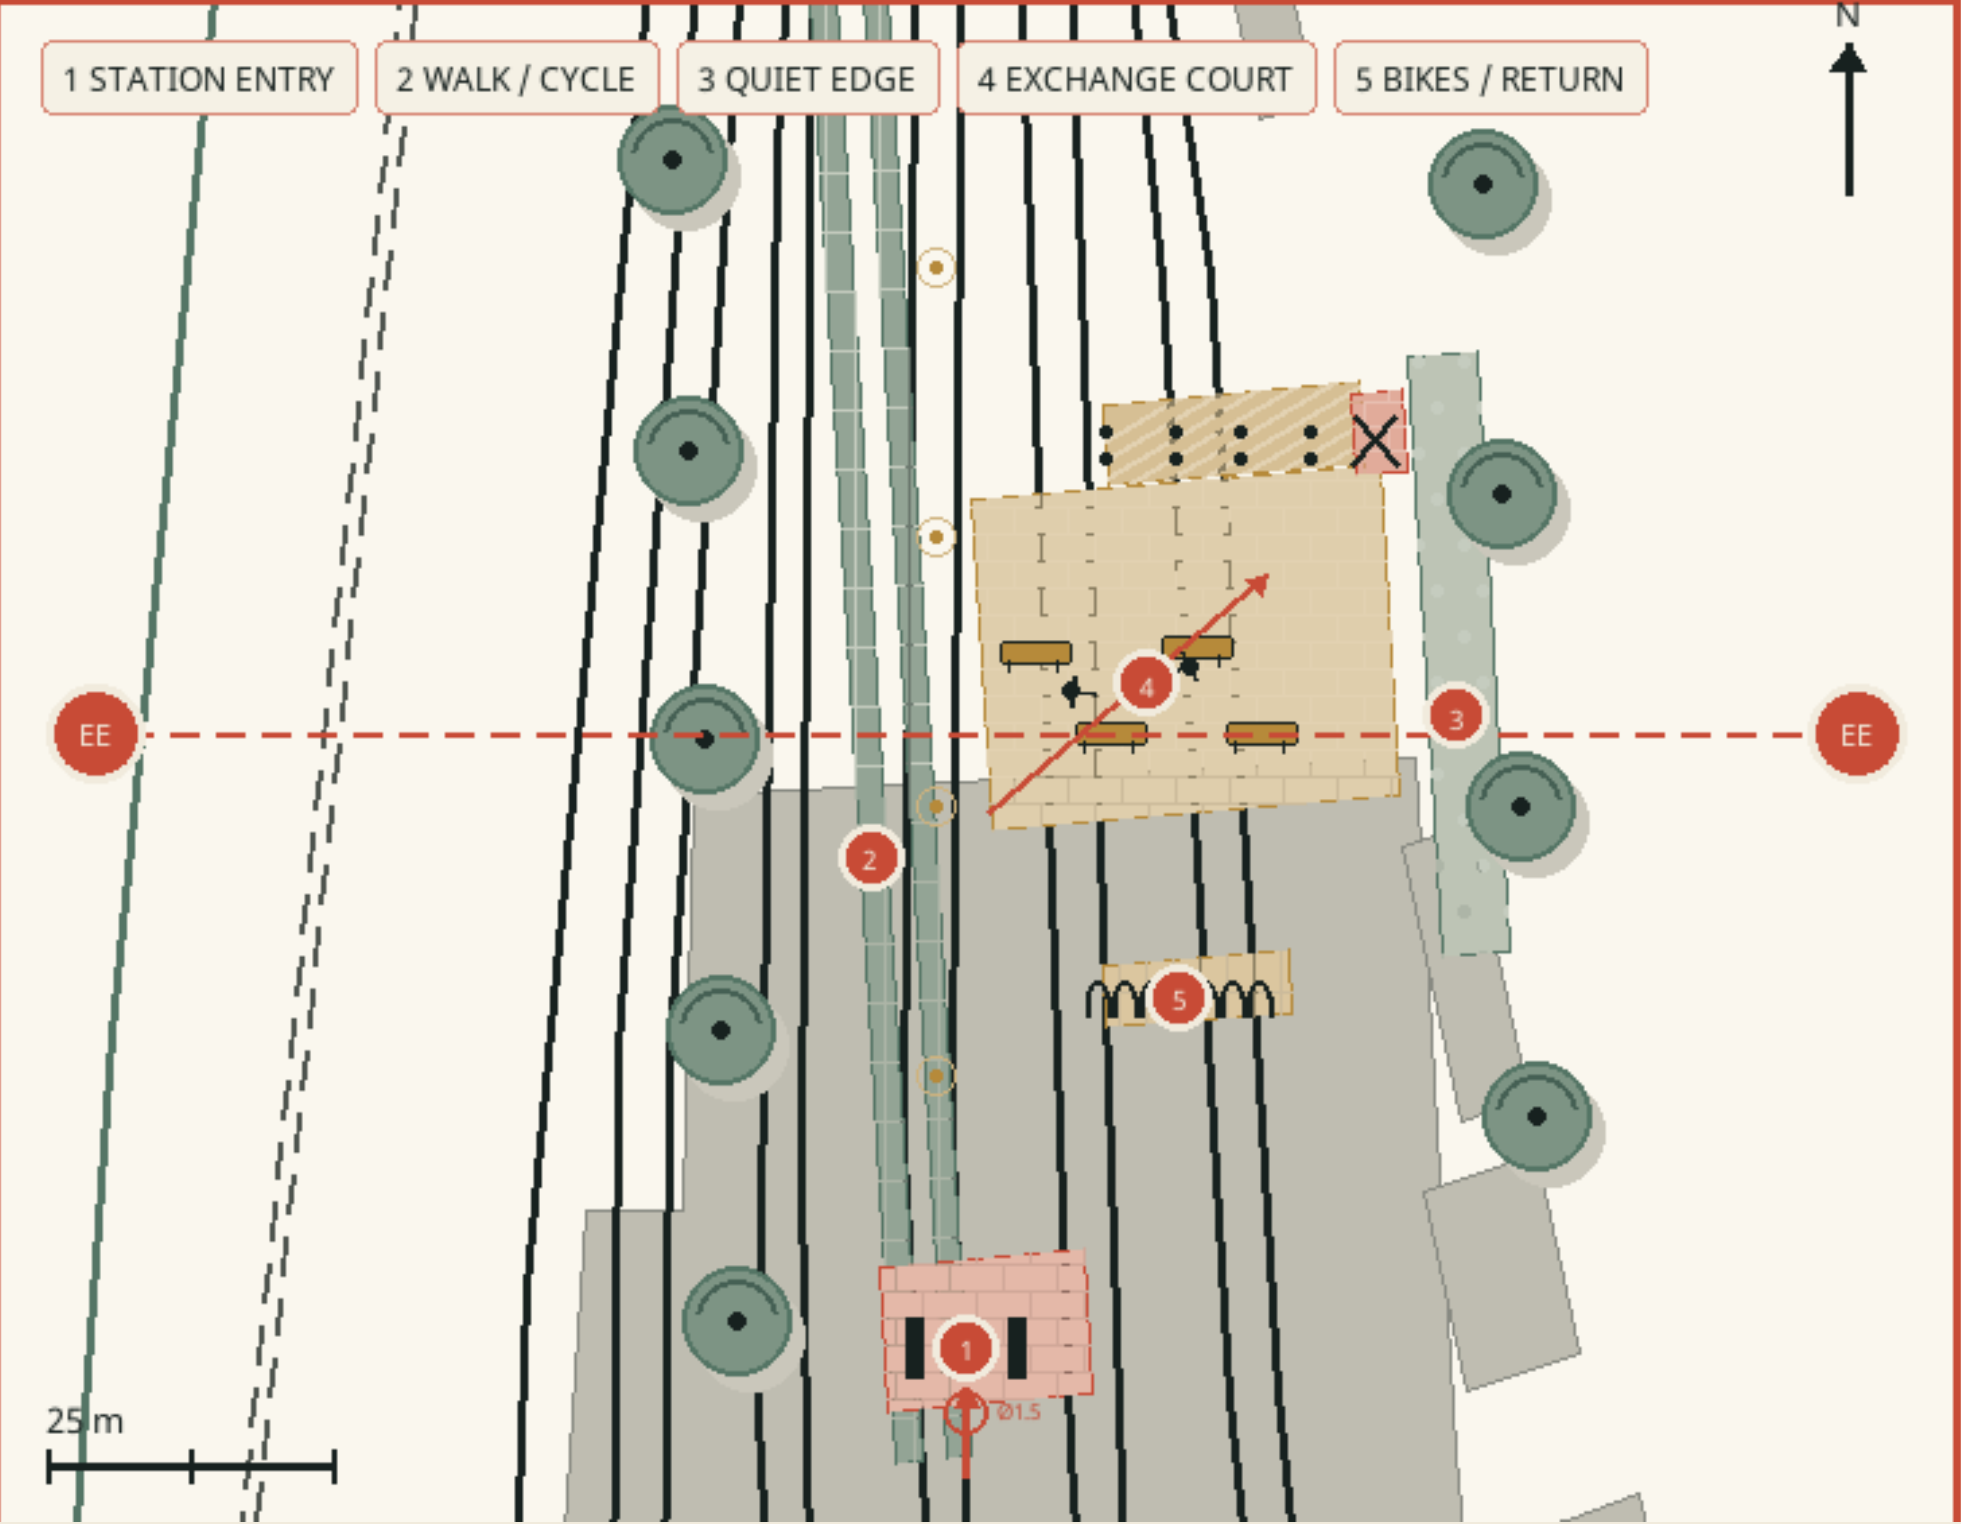

CONCEPT VIEW / NOT EVIDENCE OF EXISTING CONDITIONS

EE DAILY EDGE AT THE EXCHANGE COURT

21 m

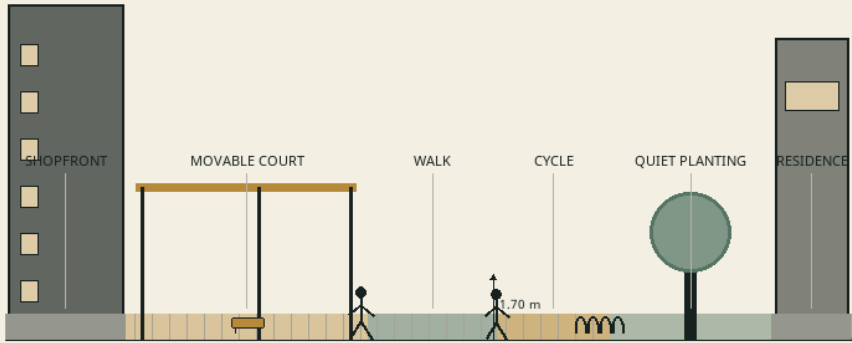

PEAK HOURS

Movement comes first

CANOPY

30 x 8 m; furniture returns after use

EXIT

Remove furniture if evacuation is blocked

04

WALKING, CROSSINGS, RAIL AND WATER


Resolve breaks first; six measured sections set access and drainage

WALK / WATER

SLOW CYCLE

STEP-FREE CROSSING

RAIL / APPROVAL

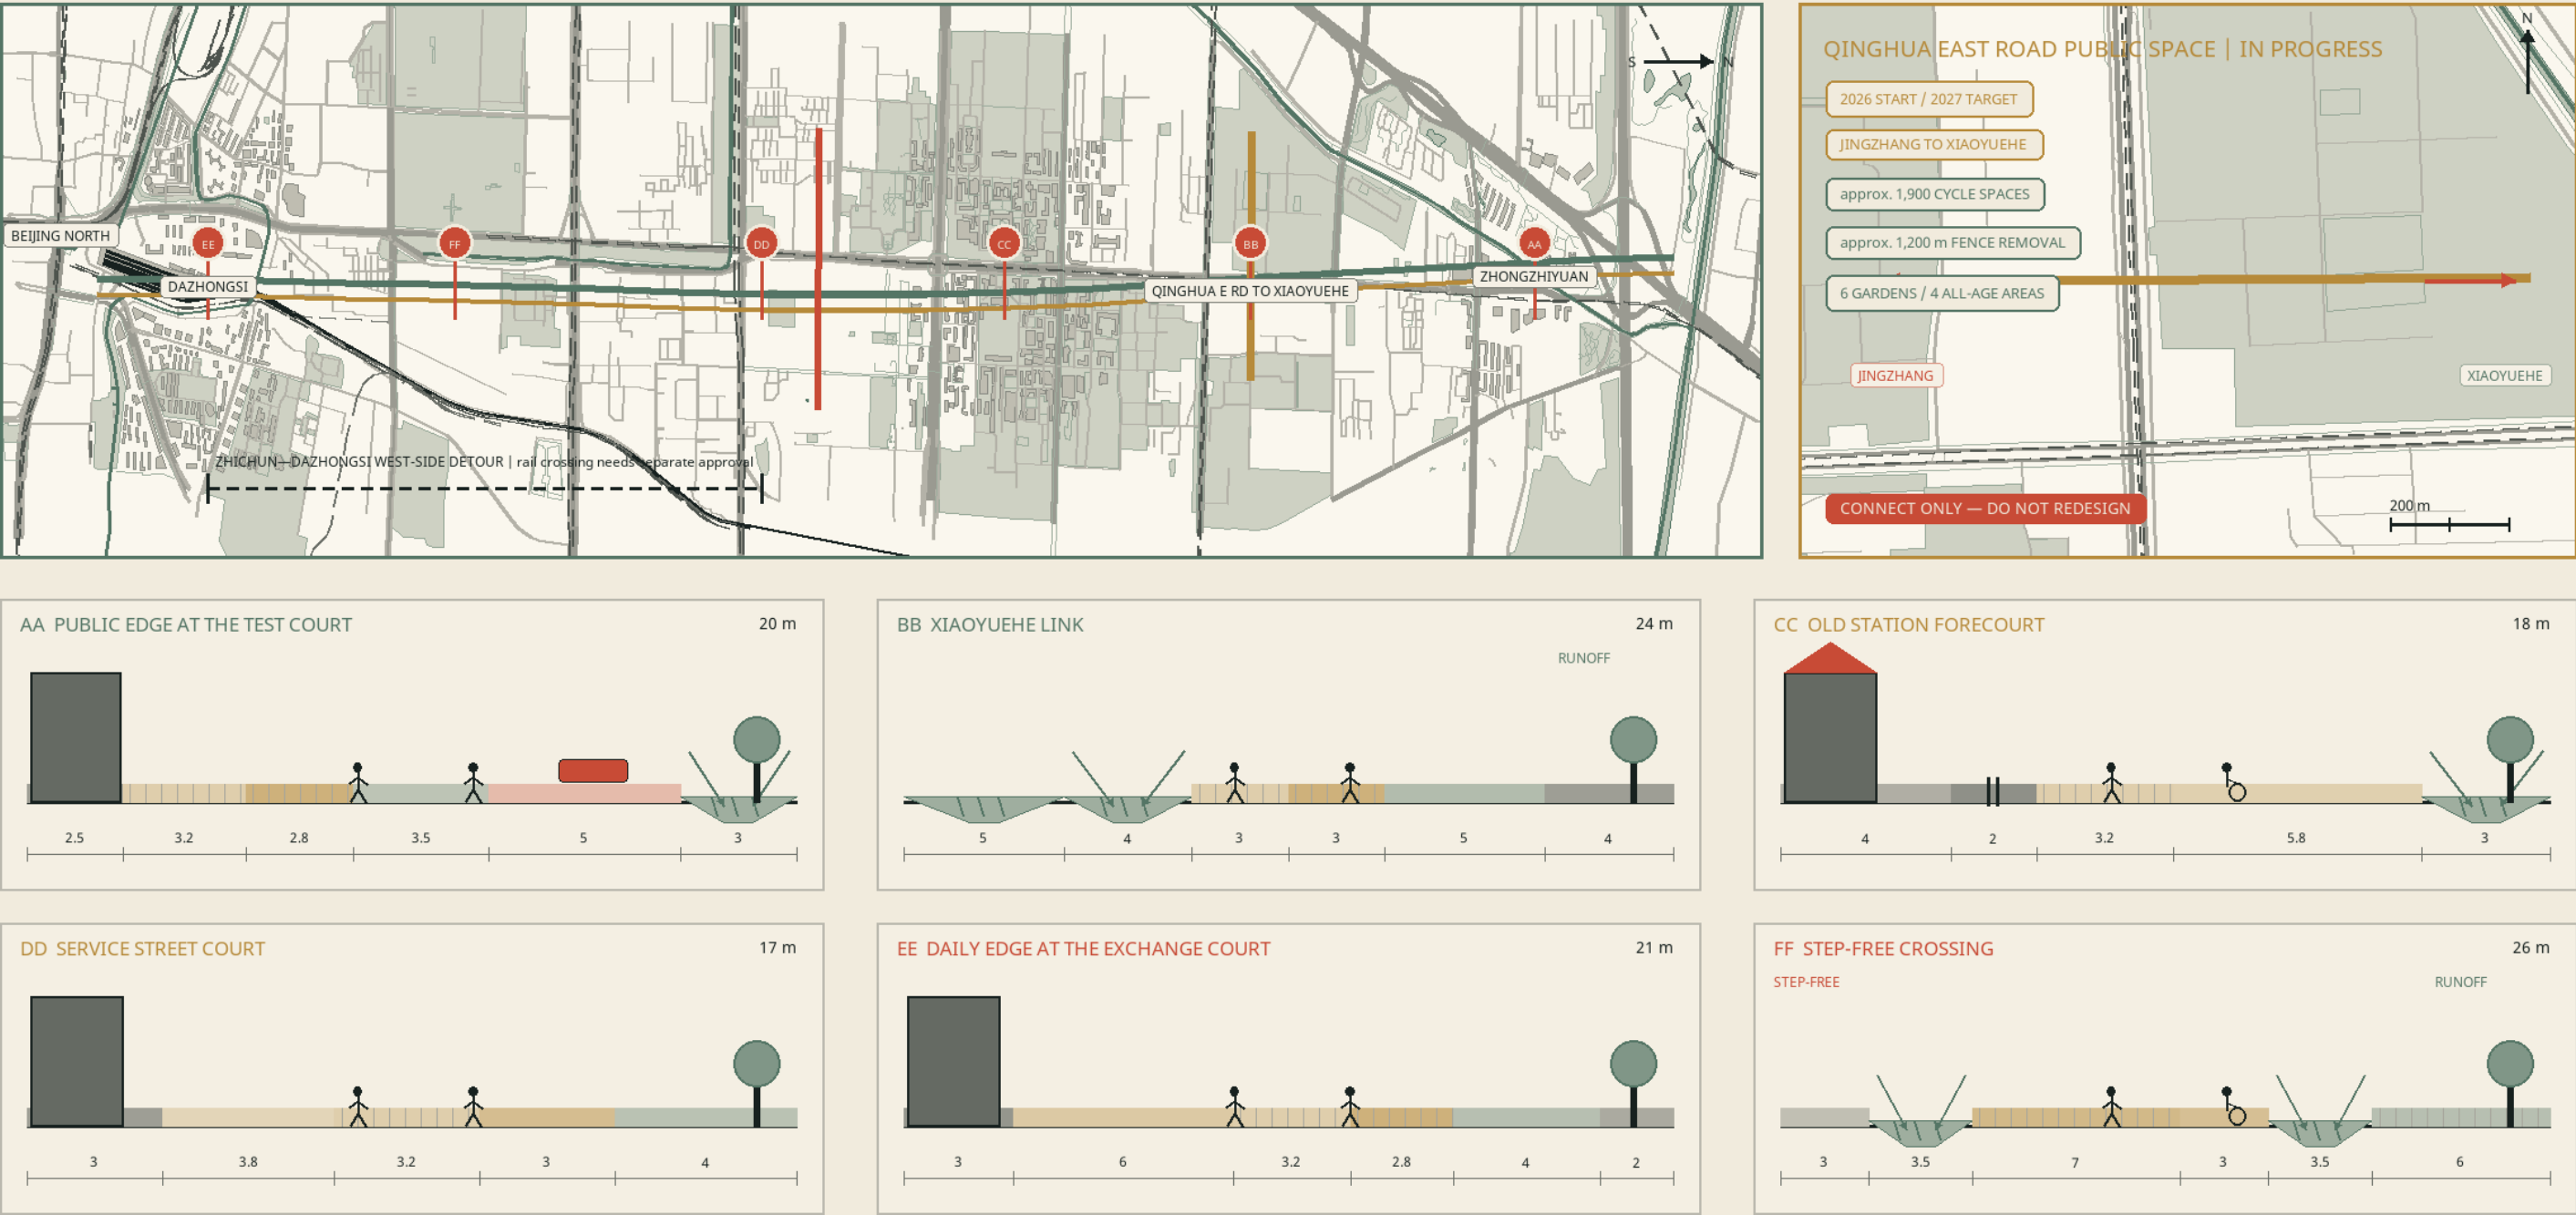


OSM context only | Concept boundaries require survey, ownership and approvals

WIDTHS IN METRES | DB11/T 1761-2020 WORKING LOGIC






CONCEPT VIEW / NOT EVIDENCE OF EXISTING CONDITIONS

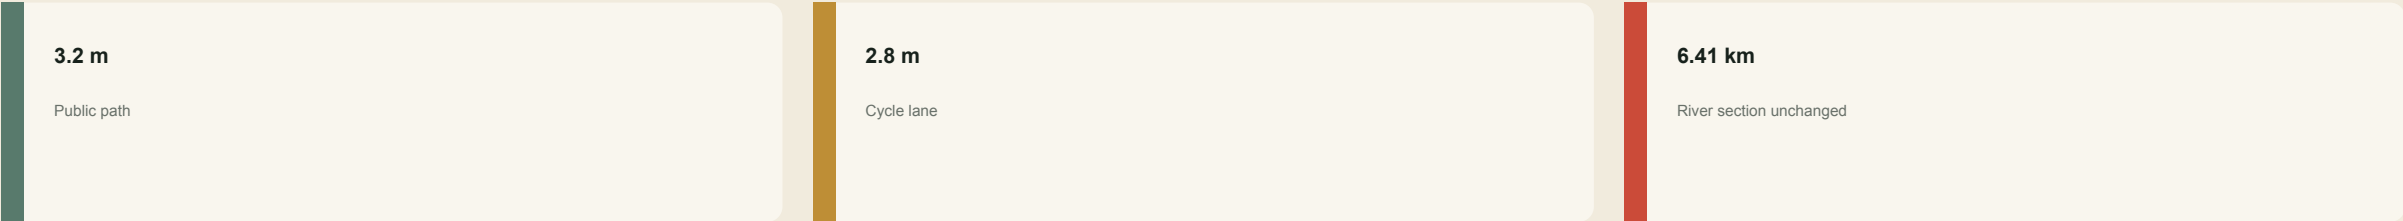

04

THE 300 M NODE, IN DETAIL

One set of dimensions across aerial, plan and section

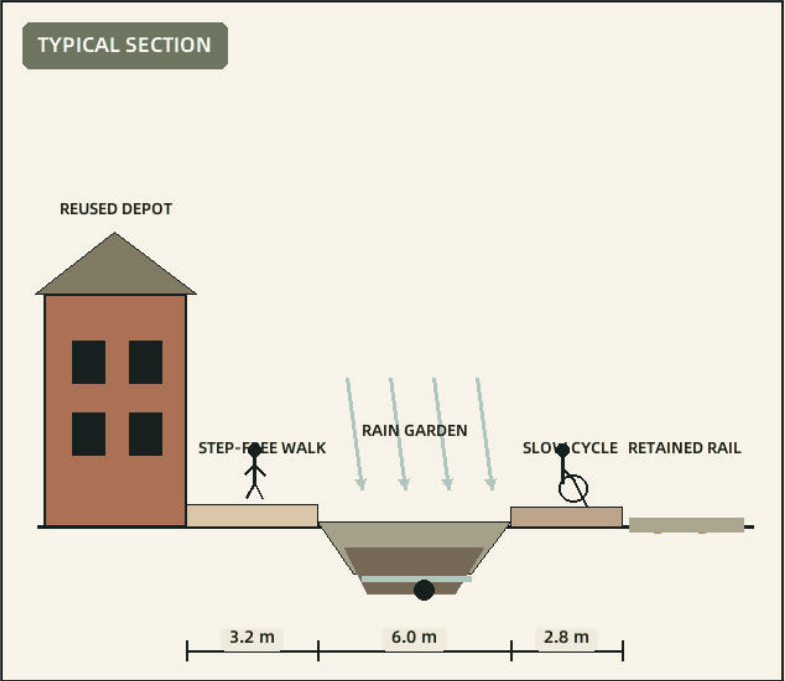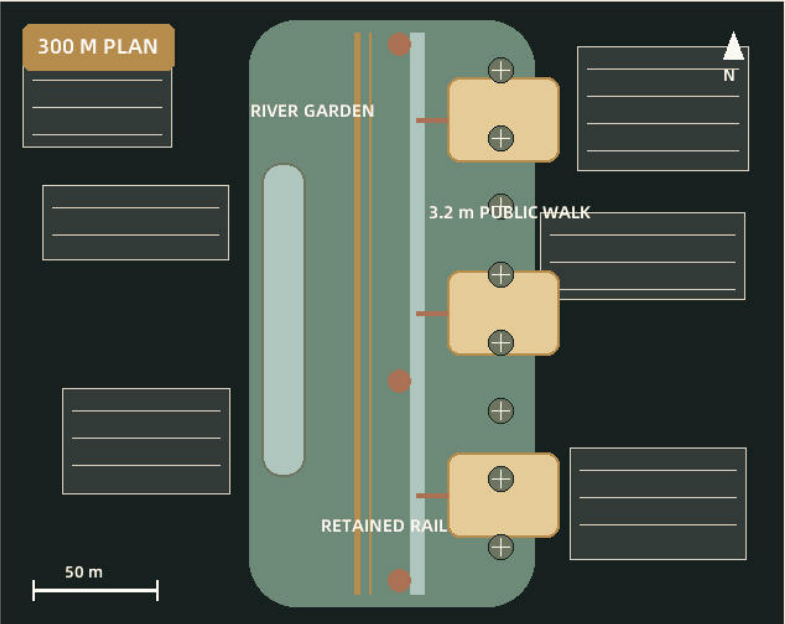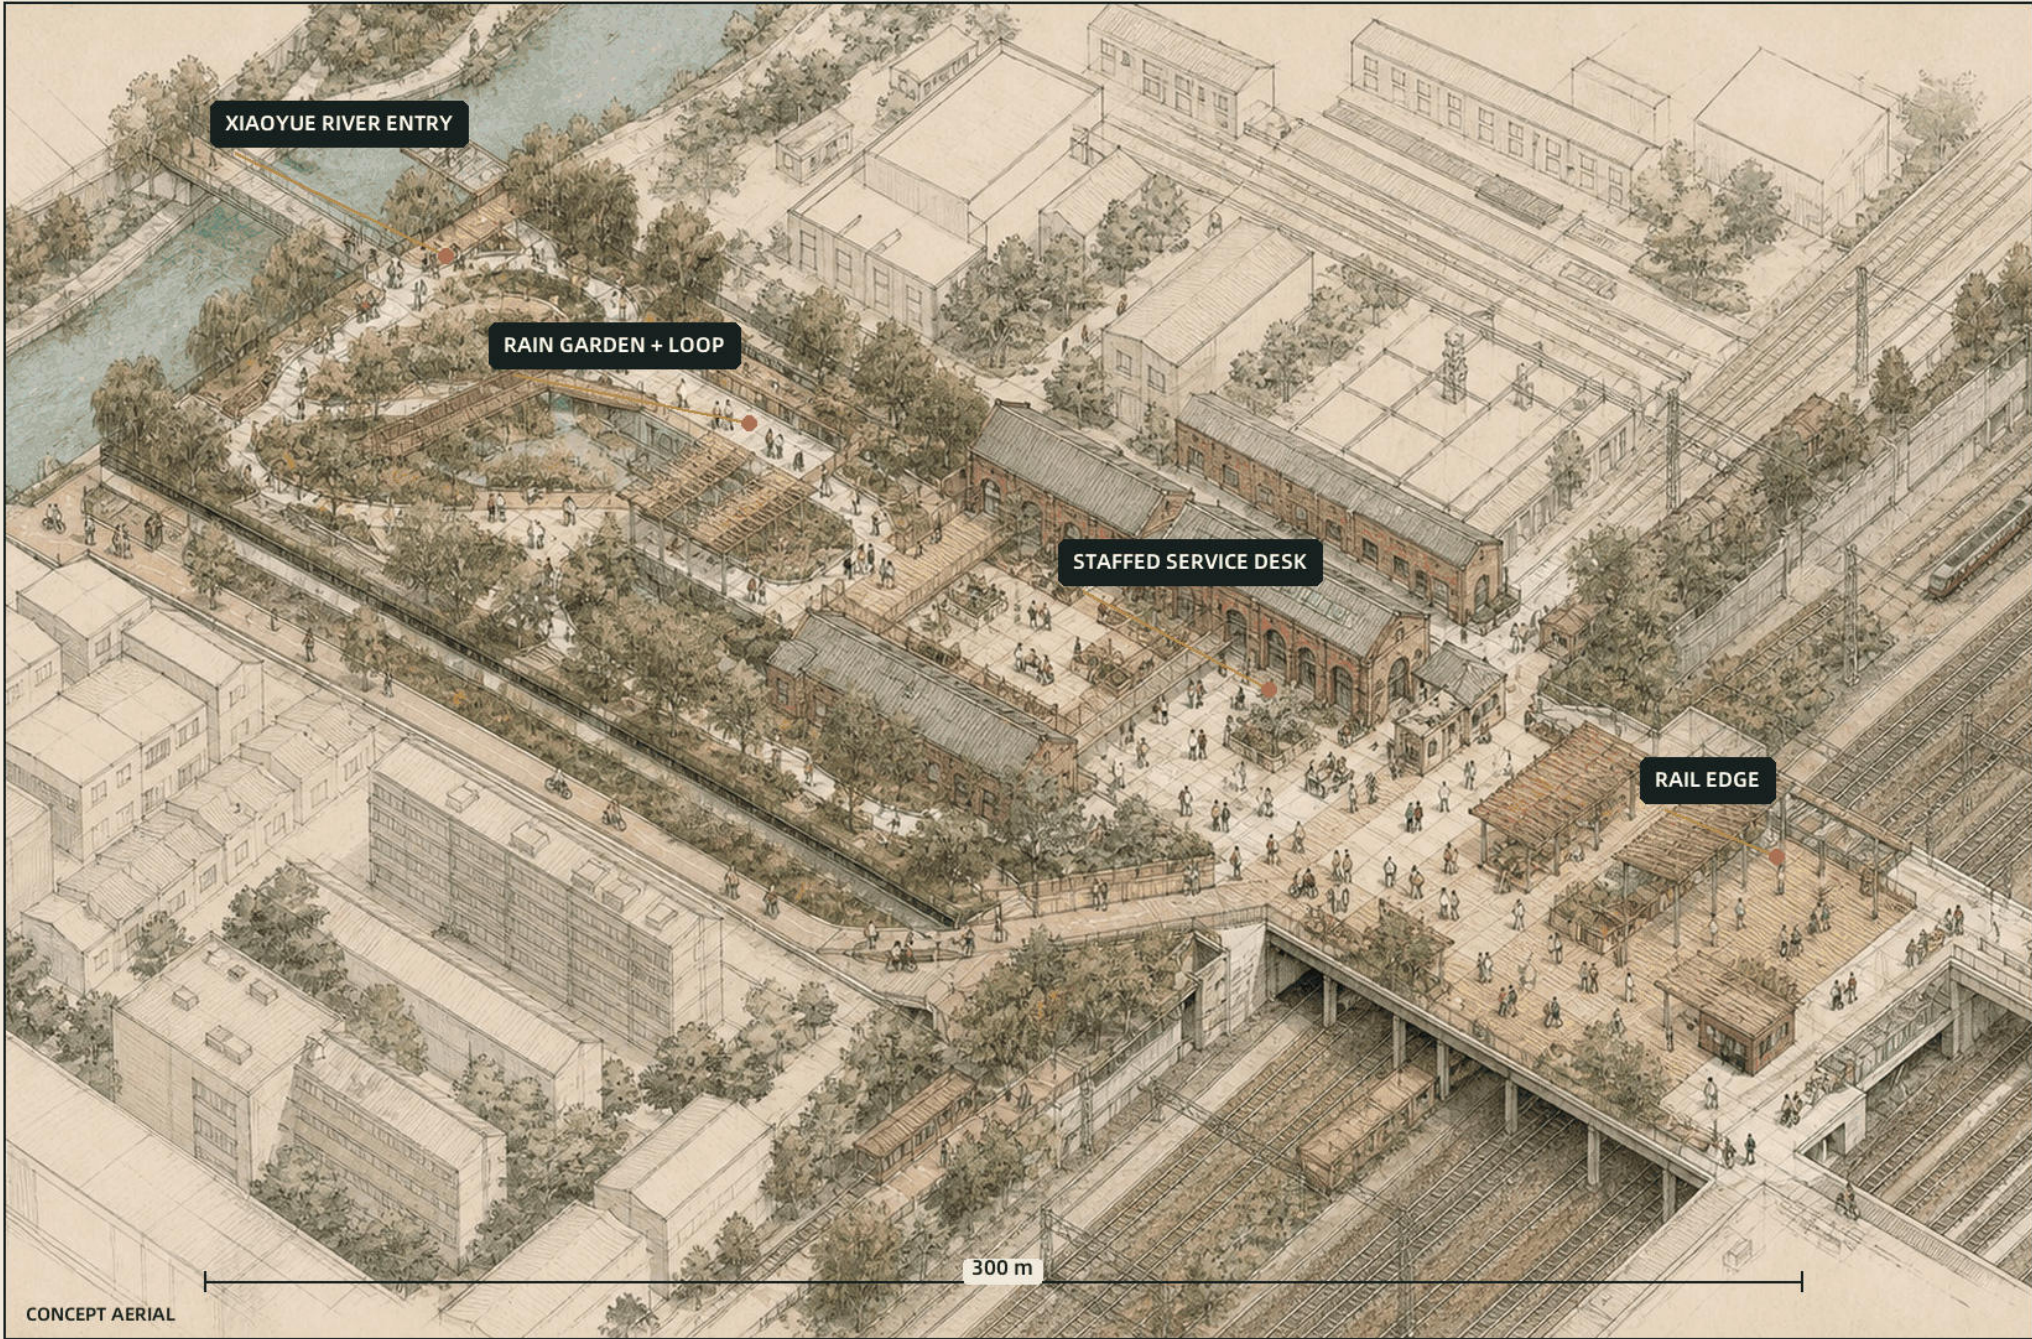

CONCEPT NODE | VERIFY OWNERSHIP, UTILITIES AND LEVELS BEFORE WORKS

OPEN-CITY-AI / HAIDIAN

PUBLIC FRONT

Entrance, ramp, service

SERVICE BACK

Repair, equipment, deliveries

QUIET EDGE

Shade, seats, low light

07

ONE DAY ON THE OPEN BELT

Four moments, four users, and a human fallback each time

07:35

XIAOYUE RIVER ENTRY

COMMUTER

ROUTE

Liudaokou → river gate → Xuezhiyuan

HUMAN FALLBACK

Staff open the drain and hand-direct traffic after ponding

VISIBLE RESULT: THE GATE STAYS OPEN

12:10

AI ORIGIN

OLDER VISITOR

ROUTE

Shaded walk → service desk → quiet bay

HUMAN FALLBACK

The attendant completes the task without asking for a QR code

VISIBLE RESULT: A WHEELCHAIR CAN PARK BESIDE A FRIEND

16:35

ZHONGZHIYUAN

PARENT + CHILD

ROUTE

School gate → test loop → rain garden

HUMAN FALLBACK

Adults hand over at the buffer; staff can stop the test

VISIBLE RESULT: PLAY STAYS OFF THE CYCLE LANE

20:30

DAZHONGSI

NIGHT STEWARD

ROUTE

Metro → court → neighbourhood exit

HUMAN FALLBACK

The steward switches the lighting circuit by hand if it fails

VISIBLE RESULT: WARM LIGHT DOES NOT GLARE INTO HOMES

FIELD CHECK | ROUTES, STAFFING AND RESULTS CAN ALL BE VERIFIED ON SITE

OPEN-CITY-AI / HAIDIAN

07:15

Access + ramp check

12:10

Staffed service

16:35

Heritage reading

20:30

Contained testing

08


FOUR COMPONENTS WE CAN ACTUALLY BUILD

Full-size dimensions, joints and maintenance, not a catalogue wall




01

TREE-SHADE CANOPY

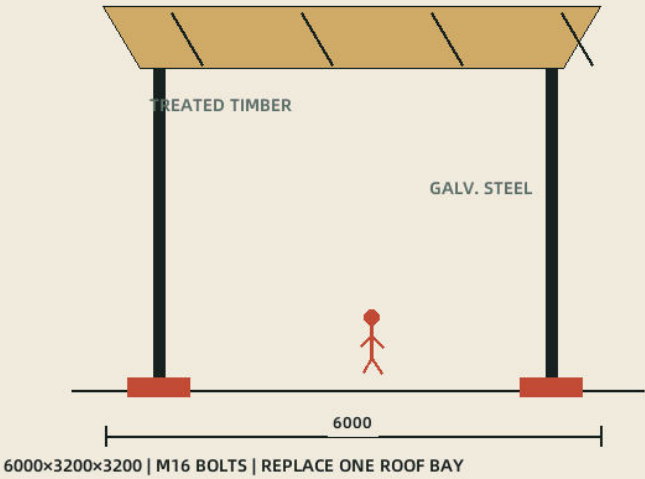


02

THREE-HEIGHT BENCH

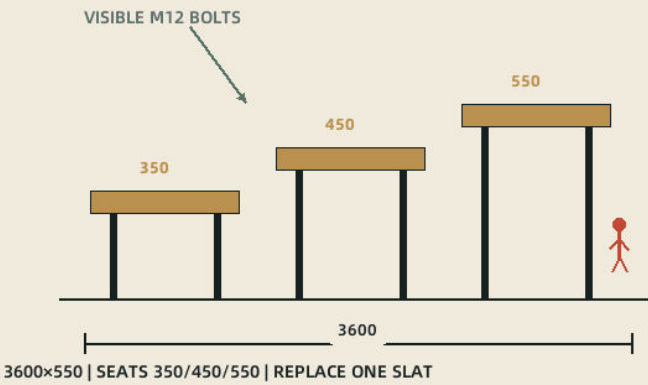


03

CLEANABLE RAIN EDGE

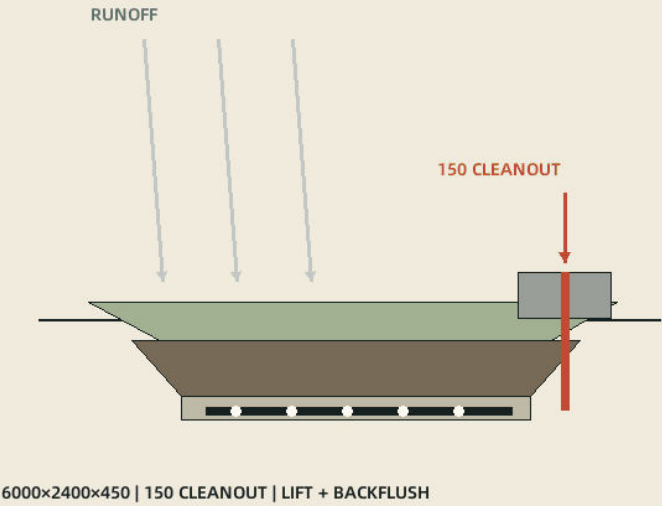

04

STAFFED SERVICE DESK

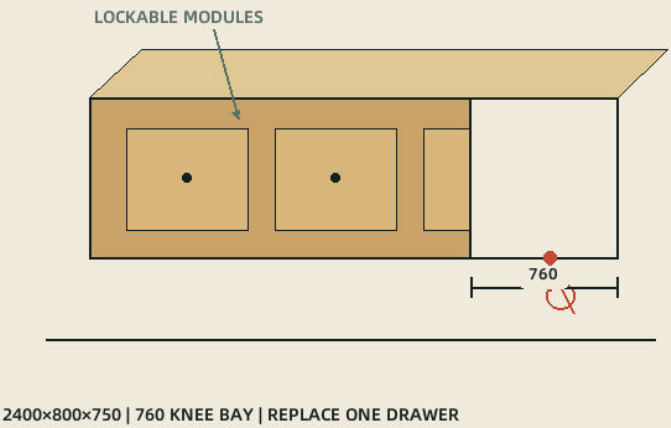

ALL DIMENSIONS IN MM | VERIFY STRUCTURE, FIRE AND UTILITIES BEFORE WORKS

OPEN-CITY-AI / HAIDIAN

CANOPY

Bolted connection

BENCHES

Three heights

RAIN EDGE

Cleaning opening

DESK

Replaceable drawer

09

FIX THE BREAKS, THEN DECIDE WHAT STAYS

One real base, three cumulative steps; public works, proposal and approvals stay separate

BUILT

UNDER CONSTRUCTION


PROPOSAL

APPROVAL REQUIRED

90 DAYS

OPEN THREE REVERSIBLE PILOTS

01

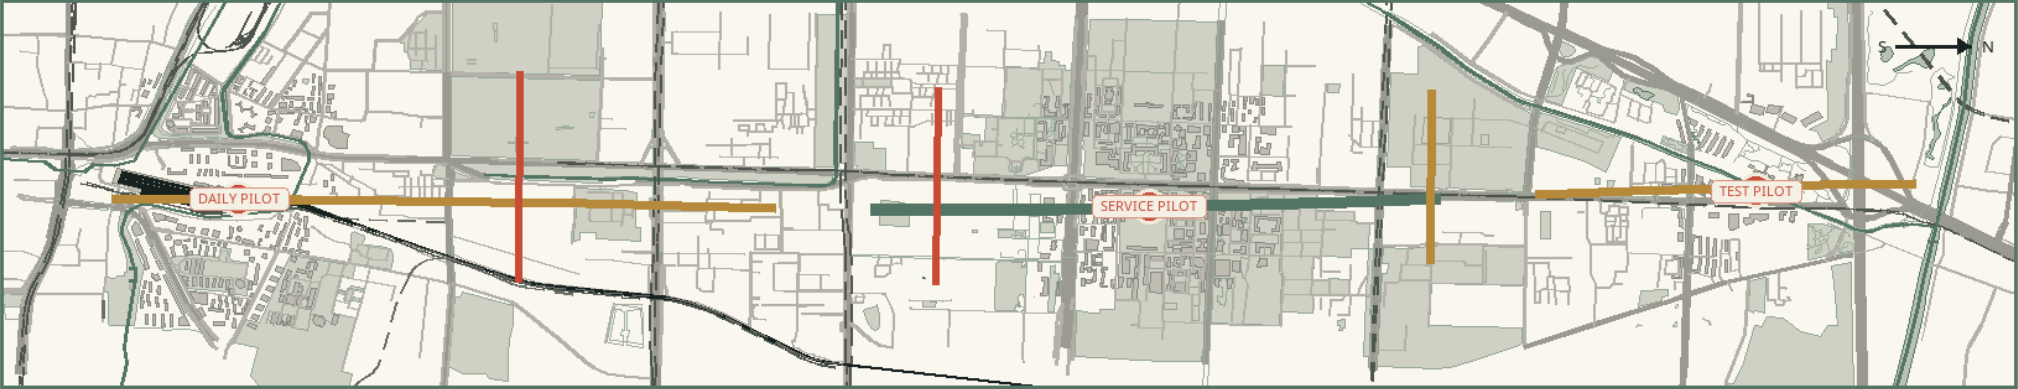

FIRST BREAK

Avoid rail structures; test three entrances and daily use

FIRST USERS

Residents, commuters, maintenance crews

PROPOSED LEAD

Subdistricts + park operator + maintenance team (proposed)


BEFORE WORK

Ownership check, survey, fire and access walk-through

1 YEAR

CUT THE WEST-SIDE DETOUR

02

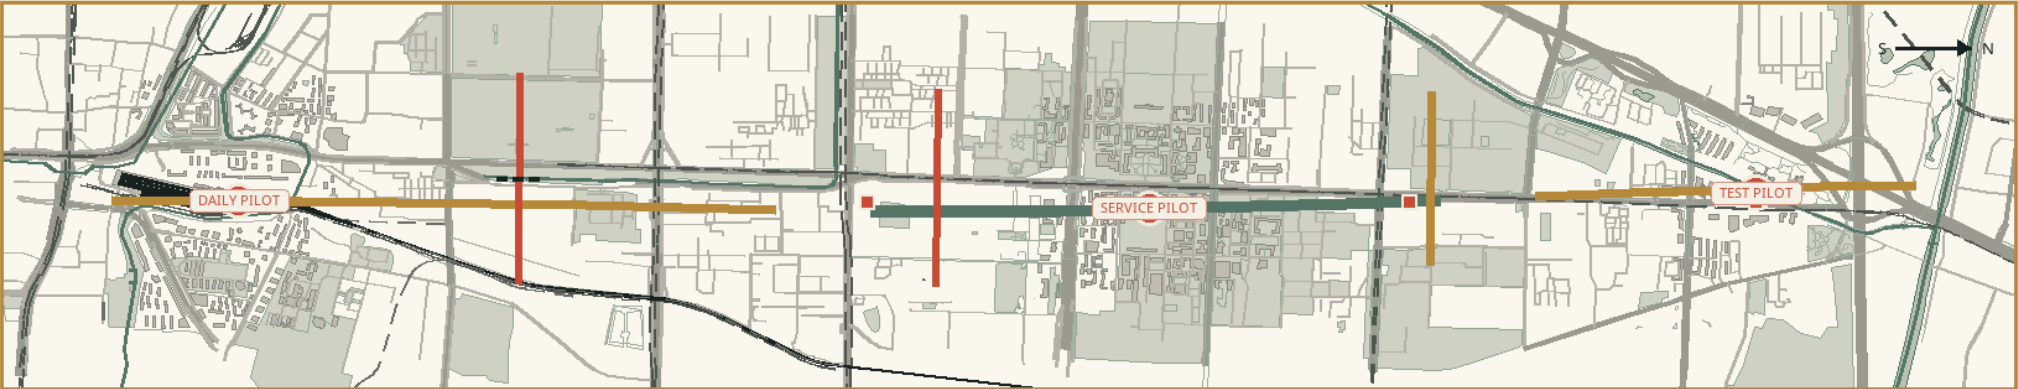

FIRST BREAK

Complete the existing-side path; any Line 13 crossing is separate

FIRST USERS

West-side residents, cyclists, service staff

PROPOSED LEAD

Transport + rail + subdistricts + park operator (proposed)


BEFORE WORK

Detour survey, Line 13 works interface, utilities and lighting

3 YEARS

KEEP ONLY USED AND MAINTAINED PARTS

03

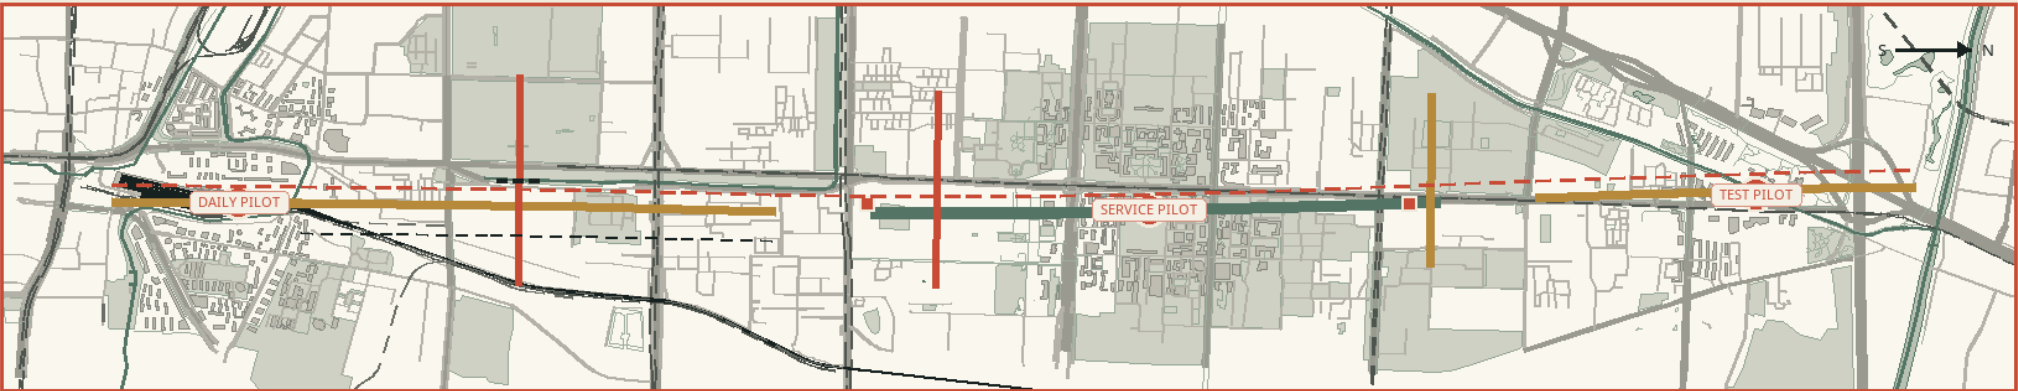

FIRST BREAK

Connect verified nodes; high-line option remains conditional long term

FIRST USERS

Corridor users and the three courtyard communities

PROPOSED LEAD

District lead + operator + landowners (proposed)

BEFORE WORK

Annual review, maintenance funding, heritage and crossing approvals

Red marks proposal additions only; black dash means heritage, rail or crossing approval is still required.

OSM context only | Concept boundaries require survey, ownership and approvals

EVIDENCE-GATED SEQUENCE | NOT A COMMITTED CONSTRUCTION SCHEDULE

90 DAYS

Three courtyard trials

1 YEAR

Crossing, rain garden, reading points

3 YEARS

Fix only after repeat review

10

THREE SIGNS, TESTED IN THE FIELD

Entry, distance and direction with clear size and viewing range

ENTRY SIGN

2400×620×140 | READ AT 30 m



MILESTONE

1050×280×120 | READ AT 8 m



DIRECTION SIGN

2200 HIGH, 900×280 BLADE | READ AT 20 m



MATERIAL BOARD

POWDER-COATED GALV. STEEL

SINGLE-PART REPLACEMENT

REPLACEABLE ALUMINIUM FACE

SINGLE-PART REPLACEMENT

MICROPRISM REFLECTIVE FILM

SINGLE-PART REPLACEMENT

2700 K SHIELDED LED

SINGLE-PART REPLACEMENT

INSTALLATION: KEEP SIGHTLINES AND TACTILE PAVING CLEAR; NO GLARE INTO HOMES

DIMENSIONS IN MM | MOCK UP EACH LOCATION AND VERIFY ILLUMINANCE ON SITE

OPEN-CITY-AI / HAIDIAN

ENTRANCE

Readable at 30 m

MILEPOST

Readable at 8 m

DIRECTION

Readable at 20 m

OPEN-CITY.AI / HAIDIAN

13 / 14

CONCEPT DESIGN / NOT FOR CONSTRUCTION / 2026-08-09



FORMER QINGHUAYUAN STATION / 2024 / CC BY-SA 4.0

SOURCE REGISTER

Beijing Municipal Forestry and Parks Bureau / 2023-06-26

Beijing Municipal Government / 2024-09-20

Beijing Municipal Cultural Heritage Bureau / 2026-02-14

OpenStreetMap contributors / ODbL 1.0

Wikimedia Commons / N509FZ / CC BY-SA 4.0

01 OFFICIAL STATUS

Phase I, Phase II, heritage status, and Xiaoyue River works retain their publication dates and original definitions.

02 WORKING BASE

OSM follows ODbL 1.0. Areas and lengths derived from submitted GeoJSON are recalculable and are not statutory boundaries.

03 WHAT PRECEDENTS DO

Xuhui Runway Park and Waterfront Toronto inform drawing order and post-occupancy review only.

04 WHAT REMAINS OPEN

Official boundaries, ownership, utilities, fire access, heritage GIS, and rail review must arrive before the PDFs are recalculated.