


JINGZHANG SWITCHBACK

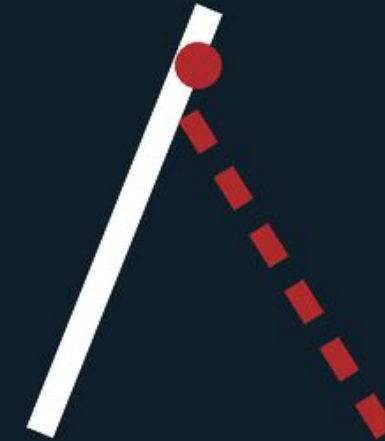

Centennial Jingzhang AI Innovation Belt open call • A3 booklet

In 1909 the Jingzhang Railway crossed the Guangou pass by building the herringbone switchback at Qinglongqiao: it traded one reversal for altitude. AI advances the same way - train, test, feedback, retrain. This proposal turns that century-old intelligence into the operating logic of the belt: a 9.72 km main track, three stations, two loops, twelve stitching milestones and twelve published service cards form a city test track that can actually be operated.

11.41 km²

Design area

9.72 km

Main track

16.2%

Green ratio

5.27%

Public-space ratio

12

Service cards


3

Landmarks

Every spatial suggestion is a concept proposal for professional teams to develop further; it does not replace statutory planning and is not a government decision. Geometry derives from the registered provisional rough boundary and is not an official redline or precise-area basis.

Concept, naming system and the switchback loop

The switchback loop

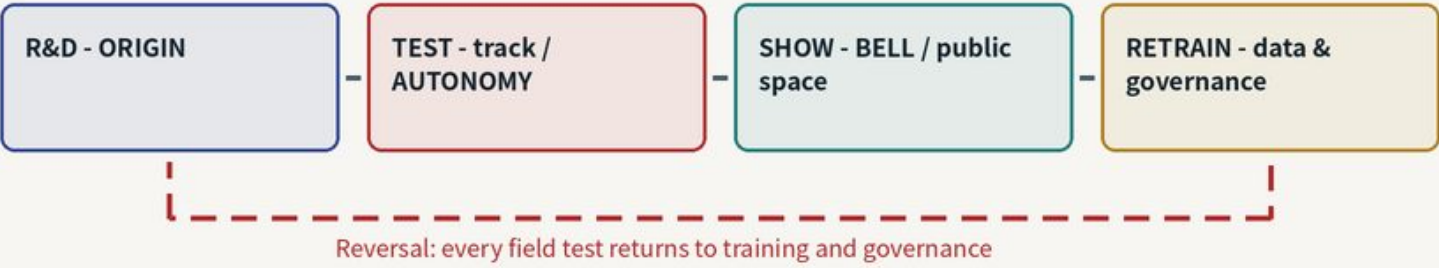


This is a spatial arrangement, not a metaphor: research happens in the ORIGIN Depot and release hall; field testing happens on the programmable lane inside the 44 m paving band and at the AUTONOMY open-test entrance; demonstration happens at the BELL station square, Echo Bell House and retail pilot street; feedback returns to the AUTONOMY standards and safety-governance cluster - an assessable, exit-capable, recomputable loop.

Naming system (track grammar)

Belt name	京张人字轨 / JINGZHANG SWITCHBACK
Tagline	可运行的AI试验轨 / The Living Test Track
Areas to stations	自主站（众智园）• 原点站（AI原点社区）• 钟声站（大钟寺）
Wings to loops	联挂环（中关村科技服务）• 月河试验环（场景赋能）
Nodes to milestones	K0-K11：导视、铭牌、端侧算力、无障碍休憩
Scenarios to services	S-01...S-12，公开时刻表与人工复核
Community to depot	开发者共建、公共任务板、贡献记录
Honours to nameplate	K0 贡献者铭牌墙，人与智能体署名可持续积累

Logo direction

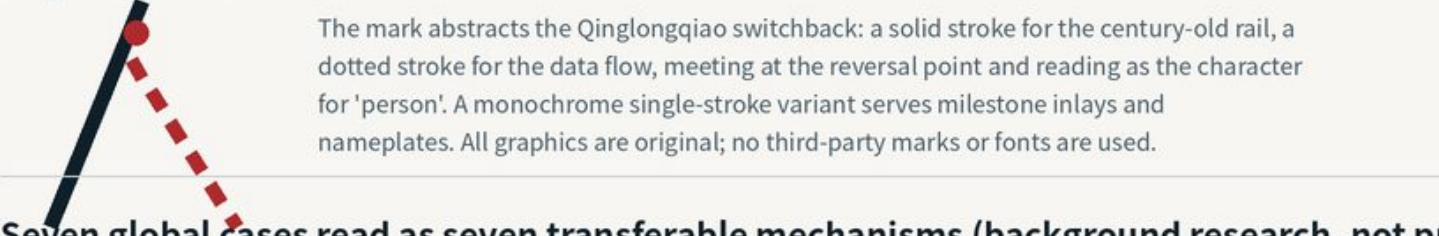

Seven global cases read as seven transferable mechanisms (background research, not primary-verified)

Case	Public facts	Transferable mechanism	Where it lands here
Station F (Paris)	1920s Halle Freyssinet rail shed (310 x 58 m) converted into a 34,000 m2 startup campus	Long-span rail heritage can carry intensive innovation uses	Existing long-span buildings prioritised for renovation
King's Cross / Knowledge Quarter (London)	100s of railway lands regenerated, 20 historic buildings retained	Public space and cultural anchors first, density follows	Track and milestones first, K0 and the Deck early
Punggol Digital District (Singapore)	50 ha district on one digital platform with a multi-operator robotics testbed in public areas	Public space as a governed multi-operator test site	Direct precedent for the programmable lane and sandbox
22@Barcelona	200 ha transformed after the 2000 plan revision through ~150 plot-by-plot plans	Renewal rules plus project-by-project plans	Item-by-item, exit-capable project list and policy
Seoul AI Yangjae Hub	A city-level AI agency links research, validation and urban application in a physical AI belt	Organise research, validation and application as one belt	Organisational prototype and international counterpart
Kendall Square (Boston-Cambridge)	Universities, firms and capital at walkable density; rising rents squeeze early-stage teams	Campus-adjacent innovation needs affordable space too	ORIGIN pairs talent housing with reserved land
Zhangjiang AI Island (Shanghai)	66,000 m2 with 21 buildings hosting more than 30 AI application scenarios	Scenario as carrier: a scenario list drives space use	Small-scale precedent for the service cards

Positionings, functions, areas and wings

How the three positionings become space

- Centennial culture belt**
Milestones and memory segment
- Urban AI life-experience belt**
Paving band, stitching, service cards
- AI convergence belt**
Stations and loops close the loop

Where the five functions land

- Full-stack autonomy**
AUTONOMY clusters and reserved land
- World-class ecosystem**
ORIGIN depot, release hall, housing
- AI+ empowerment**
Moonriver Loop services and tests
- Vibrant intelligent city**
BELL quadrants, square, Bell House
- Governance voice**
Standards cluster and timetables

Three areas and two wings

- AUTONOMY**
Models, standards, methods
- ORIGIN**
Talent, results, startups
- BELL**
Products, scenes, exchange
- Coupling Loop**
Zhongguancun services, capital
- Moonriver Loop**
Implementation and field feedback

Three scope levels and metric recomputation

Research area 约 43.6 km²	Strategy, seven case mechanisms, naming and visual direction; no redlines
Overall design area 11.41 km² (公告约 11.4)	60 land-use faces, 264 footprint suggestions, 69.6 km network, three phases
Key areas 369.3 ha (公告 368.4)	Three-station detail, renewal tendency, traffic and public-space connection

Recomputed metrics (EPSG:4548)

site_area_sqm	11,412,825.4	sqm	green_space_area_sqm	1,851,608.4	sqm	green_ratio	0.162239	ratio
public_space_area_sqm	601,206.2	sqm	public_space_ratio	0.052678	ratio	building_footprint_area_sqm	965,182.6	sqm
proposed_building_coverage_ratio	0.084570	ratio	proposed_building_count	264	count	land_use_partition_face_count	60	count
land_use_coverage_gap_sqm	50.8	sqm	park_land_area_1401_sqm	1,313,702.0	sqm	research_land_area_0802_sqm	2,044,279.8	sqm
reserved_white_land_area_16_sqm	355,849.2	sqm	residential_land_area_0701_sqm	2,687,298.2	sqm	business_land_area_0902_sqm	1,083,662.2	sqm
key_area_count	3	count	key_area_total_area_sqm	3,692,893.0	sqm	main_track_length_m	9,720.7	m
proposed_slow_mobility_network_length_m	69,607.7	m	stitching_node_count	12	count	milestone_count	12	count
pilgrimage_landmark_count	3	count	scenario_card_count	12	count	industry_test_scenario_count	4	count

Pending official data (status=unknown; no invented values)

floor_area_ratio	公开场地包未提供经审定的容积率控制条件，也没有官方边界面积，推定值会制造伪精确。
total_floor_area_sqm	缺少现状建筑层数、权属与审定高度条件，无法复算总建筑规模。
building_height_control_m	缺少经批准的高度管控、机场净空、景观视廊与文保建设控制地带条件。
official_building_density_control	公开资料没有法定建筑密度控制值；本包只提供方案提出的更新建筑基底占比。
setback_control_m	缺少道路红线、建筑控制线、消防与市政退线条件。
ai_enterprise_count_baseline	公开登记资料中没有可核验的带内 AI 企业名录与统计口径，编造企业名单属任务书禁止事项。
ai_industry_output_baseline	公开登记资料中没有带内 AI 产值统计；不得以推测值替代。


Overall structure: one track, three stations, two loops, twelve milestones

JINGZHANG SWITCHBACK

One Track, Three Stations, Two Loops, Twelve Milestones


Overall design area 11.4 km² concept suggestion | Figure F-01

Open co-creation package huer512 / jingzhang-living-test-track

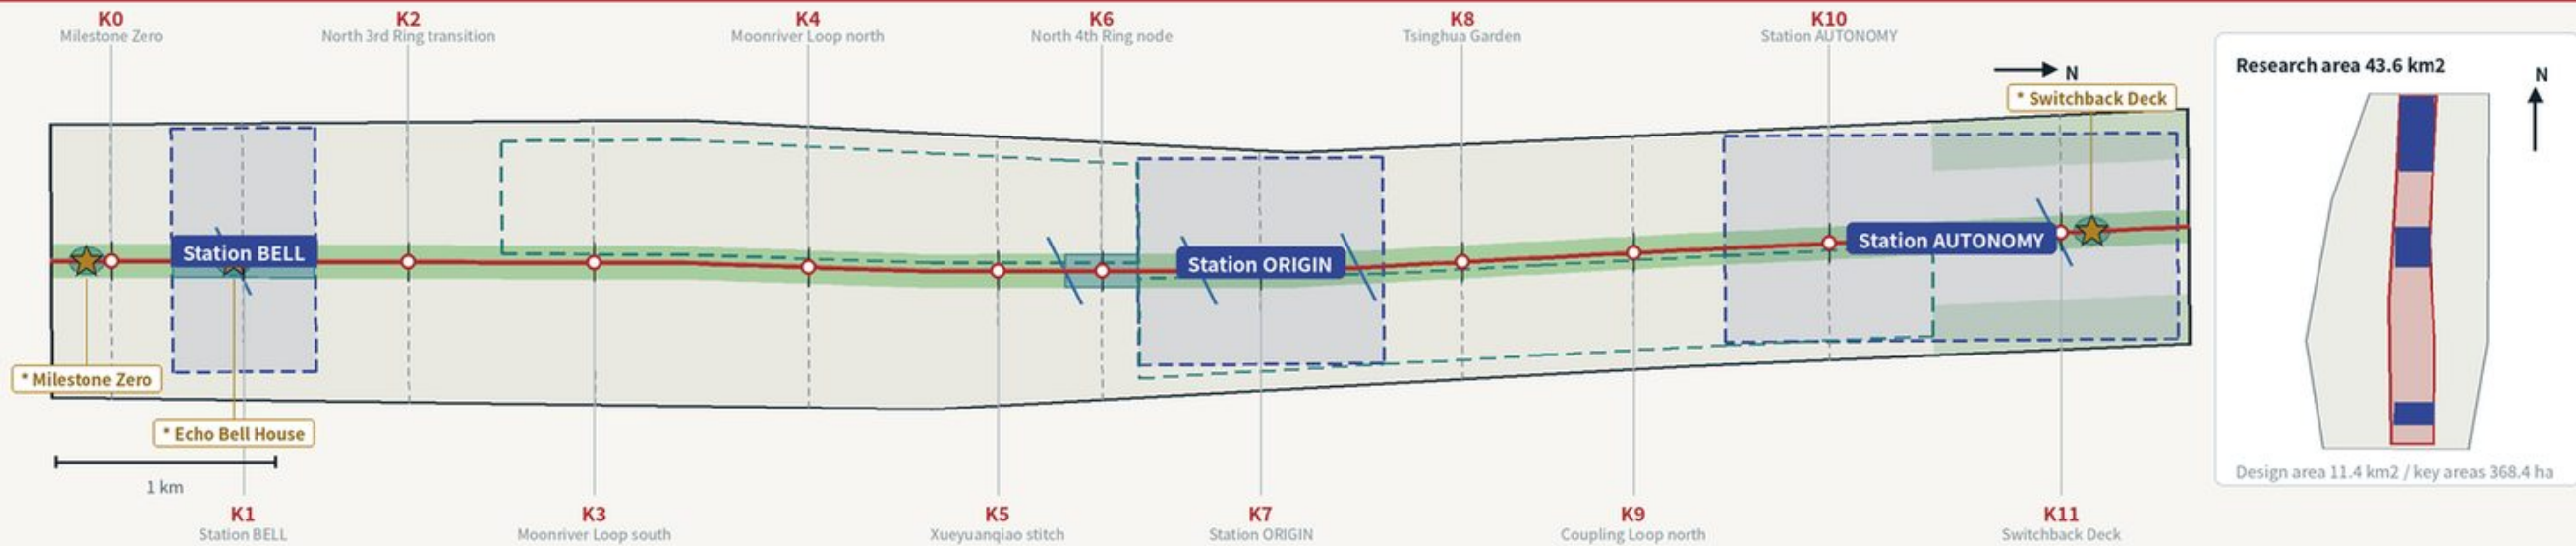

The switchback loop: how the belt operates

1909 Qinglongqiao switchback -> 2026 AI iteration loop

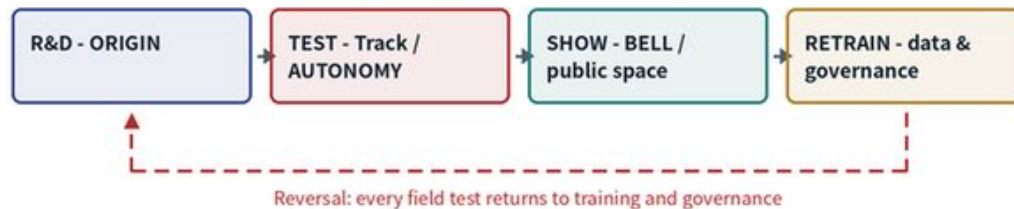

The herringbone switchback let 1909 engineering climb the Guangou pass by trading a reversal for altitude. Here it becomes the operating logic of the belt: research at ORIGIN, field testing on the track and at AUTONOMY, demonstration at BELL, and feedback returning to data and governance - an operable loop, not a strip to look at.

Naming system and logo direction

Track grammar: track, station, loop, milestone, service, depot, nameplate

Main name	京张人字轨 / JINGZHANG SWITCHBACK
Tagline	可运行的AI试验轨 / Living Test Track
Stations	自主站 • 原点站 • 钟声站
Loops	联挂环 • 月河试验环
Scenarios	班次卡 S-01...S-12
Community	机务段 Depot (开发者共建)
Honours	铭牌 Nameplate (K0 铭牌墙)

The mark abstracts the Qinglongqiao switchback: a solid stroke for the century-old rail and a dotted stroke for the data flow, meeting at the reversal point and reading as the character for 'person'. All graphics are original; no third-party marks or fonts are used.

Station AUTONOMY

K10 • 192.1 ha

Full-stack autonomy and AI governance voice
Qinghe low-carbon innovation waterfront; Standards and safety-governance cluster

Station ORIGIN

K7 • 104.3 ha

World-class ecosystem, campus-adjacent translation
Campus-park-neighbourhood stitching at K7; Open-source Depot and release hall

Station BELL

K1 • 72.0 ha

AI-native industries and global visibility
Four-quadrant pedestrian connection at the metro junction; Station-city civic square

11.41 km²

Design area

5.3%

Public-space ratio

16.2%

Green ratio

9.7 km

Main track

How the three positionings become space

Centennial Jingzhang culture belt

Milestones and the memory segment carry the railway story

Urban AI life-experience belt

Paving band, stitching nodes and service cards

AI convergence innovation belt

Stations and loops close the switchback loop

Where the five functions land

Full-stack autonomy

AUTONOMY clusters plus reserved land

World-class ecosystem

ORIGIN depot, release hall, talent housing

AI+ empowerment paradigm

Moonriver Loop scenarios and validation grounds

Vibrant intelligent city

BELL connections, square and Echo Bell House

Global governance voice

Standards cluster and published timetables

Three areas and two wings as one loop

AUTONOMY (area)

Models, standards, governance methods

ORIGIN (area)

Talent, open-source results, startups

BELL (area)

Products, consumption scenes, exchange

Coupling Loop (wing)

Zhongguancun services and capital

Moonriver Loop (wing)

Scenario empowerment and field feedback


Provisional boundary: geometry is derived from the repository provisional rough corridor (provisional_constraint, official_boundary=false). It is not an official redline, approval basis or precise-area basis; the package is recalculated when official geometry is released.

All spatial suggestions are concept proposals for professional teams to develop further. They do not replace statutory planning and are not government decisions. Basis: open-call announcement (2026-05-09), agent taskbook, MOHURD urban-design and regulatory-plan measures, MNR land-use guide. Data: this package's geometry/* .geojson and metrics.json.

JINGZHANG SWITCHBACK

Land-use Structure and Reserved-Land Strategy: a 60-face seamless partition

Coded with the MNR land-use classification guide | Figure F-02
Open co-creation package huer512 / jingzhang-living-test-track

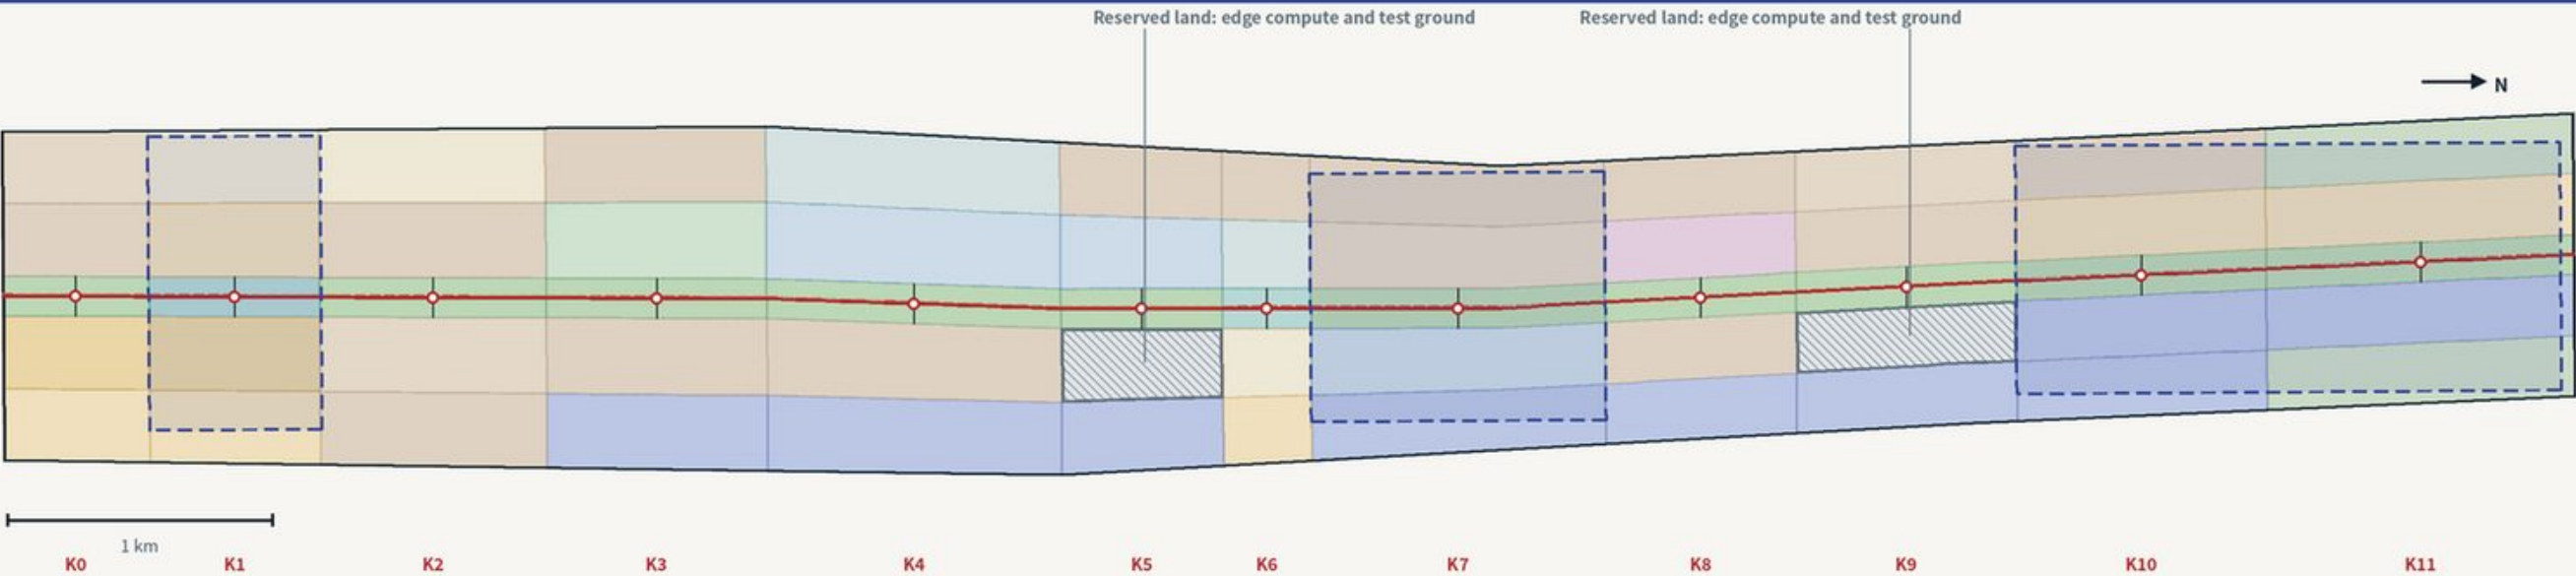

Land-use codes, areas and design intent

0701 Residential	268.7 ha	23.5%	0904 Other services	50.7 ha	4.4%
0802 Research	204.4 ha	17.9%	0806 Health	40.1 ha	3.5%
1401 Park green	131.4 ha	11.5%	16 Reserved	35.6 ha	3.1%
0902 Business	108.4 ha	9.5%	0901 Commercial	33.3 ha	2.9%
0702 Community service	85.1 ha	7.5%	0805 Sports	23.9 ha	2.1%
0804 Education	74.5 ha	6.5%	0803 Culture	16.7 ha	1.5%
1402 Protective green	53.8 ha	4.7%	1403 Civic square	14.7 ha	1.3%

Partition topology and recomputation

Faces	60
Coverage gap	50.8 m ²
Overlaps	0
Tolerance	1,141 m ² (0.01%)
Park green	131.4 ha
Research	204.4 ha
Reserved	35.6 ha

The partition is generated, not hand-drawn: the provisional boundary, twelve segment lines and longitudinal control lines are polygonized together, so adjacent faces share vertices and the result is seamless and overlap-free in EPSG:4548, recomputable by scripts/spatial_review.py. Reserved land keeps the uncertainty of compute, energy and test grounds in space instead of in false-precision indicators.

Twelve segments: dominant land use, renewal tendency, projects

Retain/renovate/demolish is a concept suggestion pending ownership and survey data

Seg/Milestone	Area	Dominant land use	Renewal tendency	Key renewal projects
B01 • K0	69.6 ha	Business + commercial	Renovate-led	Milestone Zero and gateway frontage
B02 • K1	81.6 ha	Business + civic square	Renovate + selective new build	Quadrant link, square, Echo Bell House
B03 • K2	109.6 ha	Residential + community	Retain-led	AI life-service street, embedded services
B04 • K3	108.3 ha	Research + sports	Renovate + new build	Moonriver Loop south, trackside sports
B05 • K4	142.9 ha	Research + health	New-build-led	AI+health validation ground, rental housing
B06 • K5	75.1 ha	Research + reserved	Renovate + reserve	Translation street, compute/energy reserve

Seg/Milestone	Area	Dominant land use	Renewal tendency	Key renewal projects
B07 • K6	39.2 ha	Business + civic square	Renovate-led	Stitching square, talent one-stop service
B08 • K7	122.6 ha	Research + education + community	Low-disturbance renewal	Depot, release hall, talent housing
B09 • K8	77.5 ha	Residential + culture	Retain + restore	Memory gallery, open-source units
B10 • K9	88.9 ha	Research + reserved	Renovate + reserve	Coupling Loop services, test reserve
B11 • K10	100.8 ha	Research + business	New-build-led	Autonomy clusters, standards, display
B12 • K11	125.1 ha	Protective green + research	Ecology-first	Switchback Deck, Qinghe waterfront


Provisional boundary: geometry is derived from the repository provisional rough corridor (provisional_constraint, official_boundary=false). It is not an official redline, approval basis or precise-area basis; the package is recalculated when official geometry is released.

All spatial suggestions are concept proposals for professional teams to develop further. They do not replace statutory planning and are not government decisions. Basis: open-call announcement (2026-05-09), agent taskbook, MOHURD urban-design and regulatory-plan measures, MNR land-use guide. Data: this package's geometry/*.geojson and metrics.json.

JINGZHANG SWITCHBACK

Three Stations in Detail: AUTONOMY, ORIGIN, BELL

Key detailed-design area 368.4 ha concept suggestion | Figure F-03
Open co-creation package huer512 / jingzhang-living-test-track

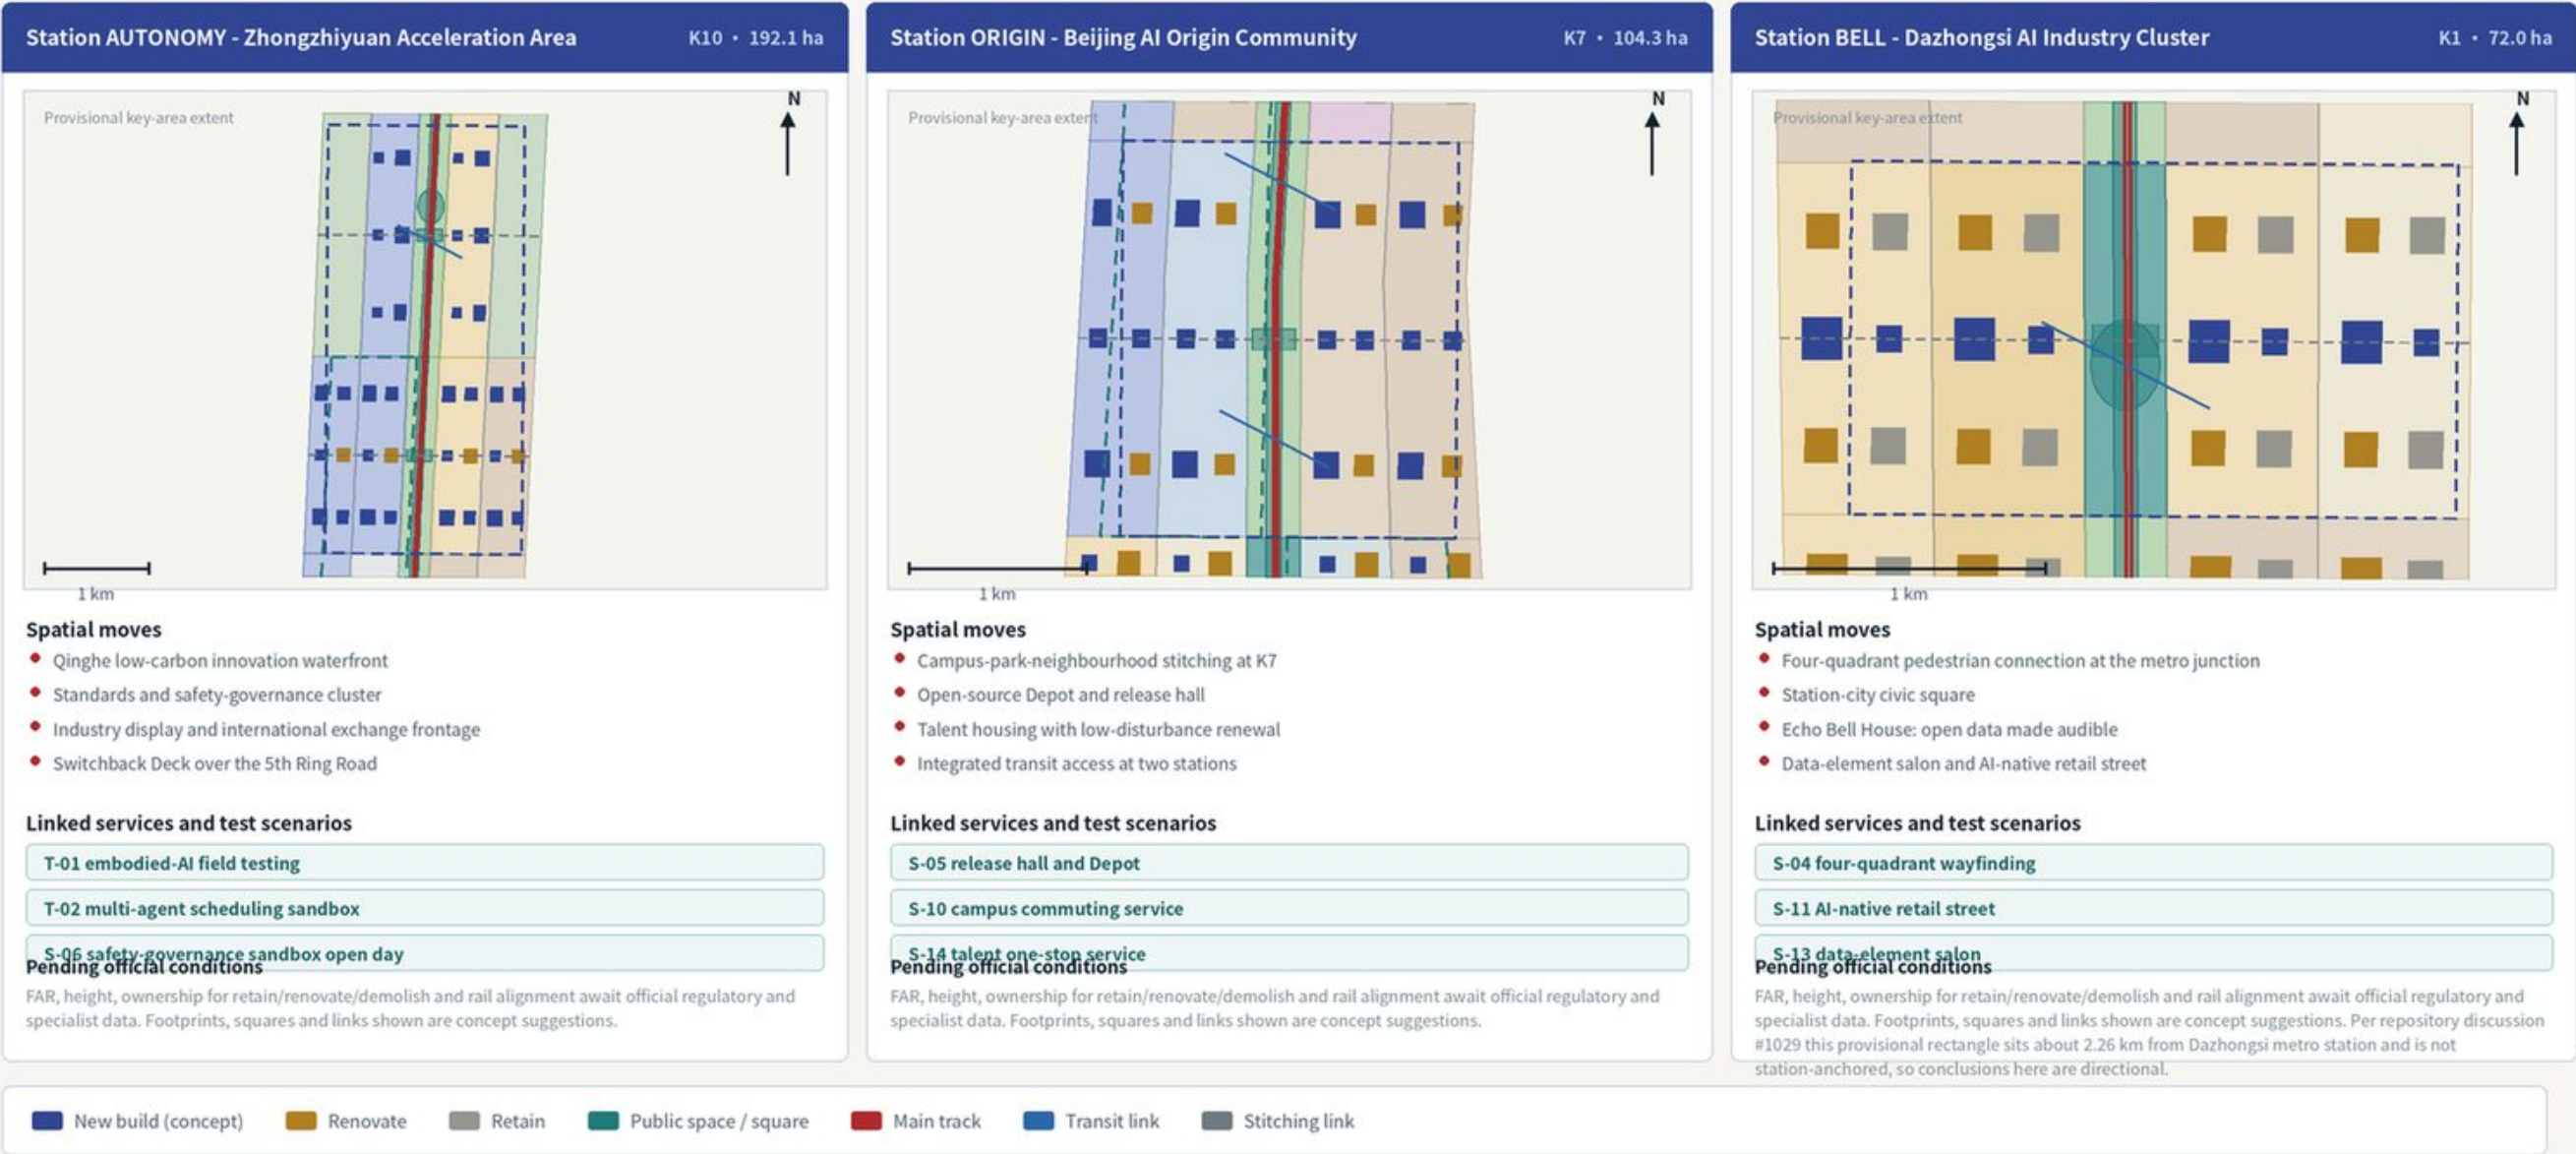


JINGZHANG SWITCHBACK

Stitching, Blue-Green Network and the Programmable Lane Section


12 stitching nodes, 5 transit links, 44 m public paving | Figure F-04

Open co-creation package huer512 / jingzhang-living-test-track

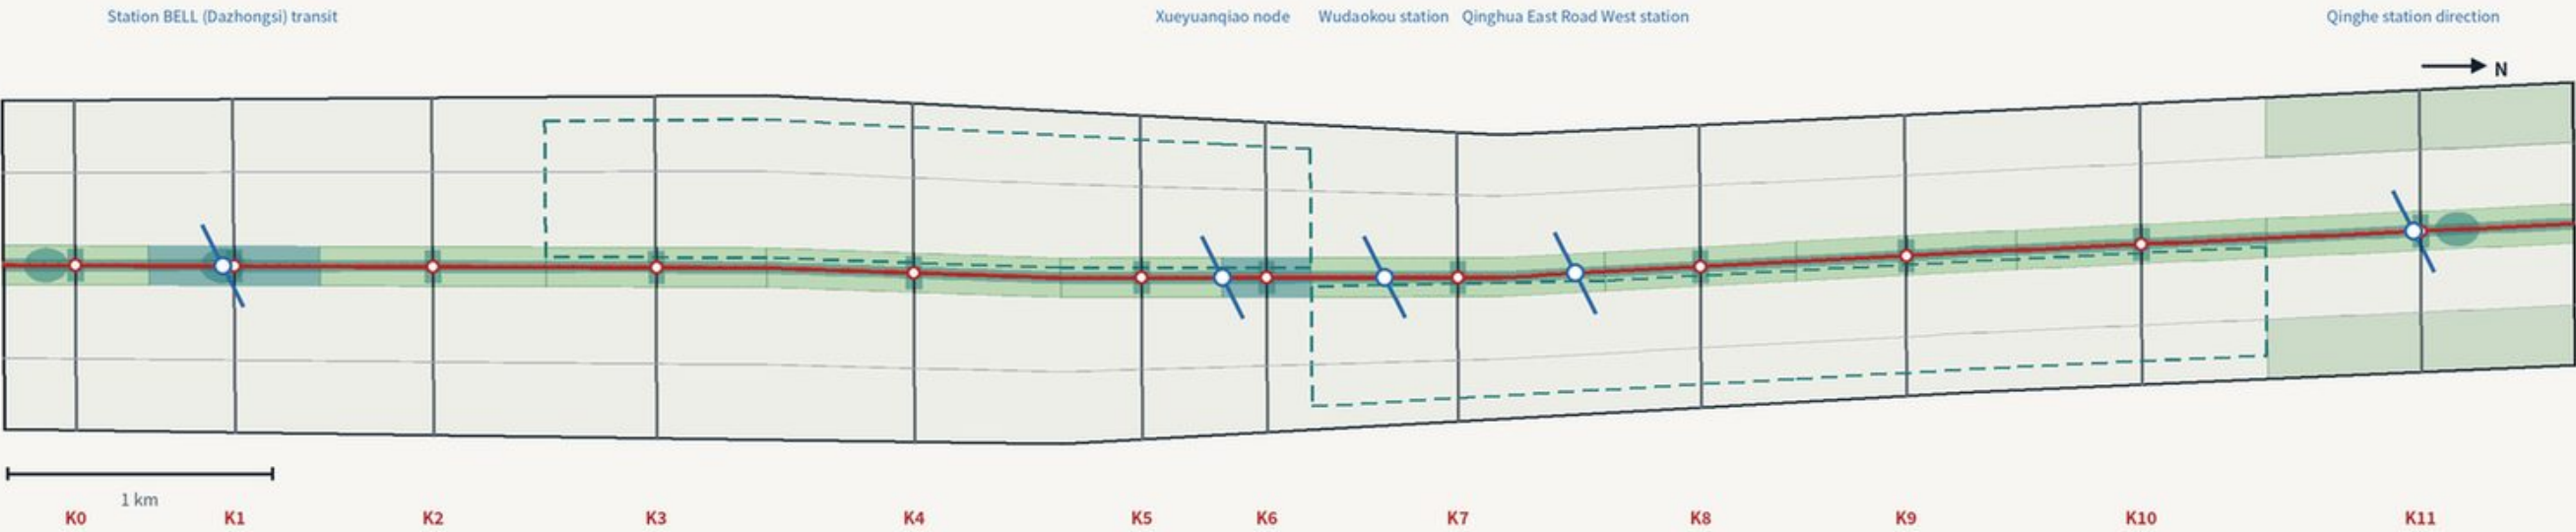

Section of the switchback public paving band (concept, 44 m)

Heritage strip | 4.5 m slow lane | 2.5 m programmable lane | buffer | community edge

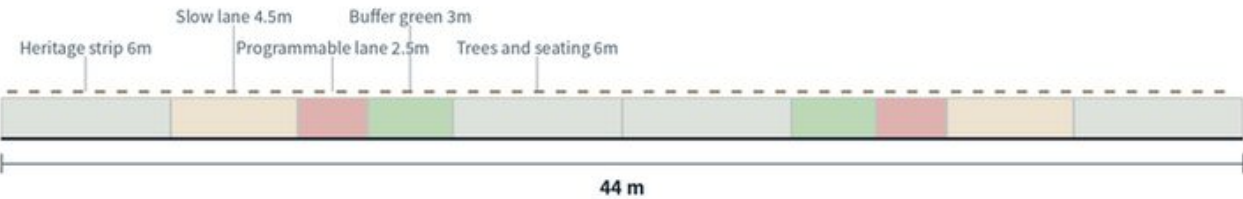

The section is about time, not width. The programmable lane shares material and level with the slow lane: by default it is walking and resting space, opened by published timetable for delivery, cleaning and wheelchair-companion trials, with on-site human override and stop controls, and no night-time testing.

Gap stitching and the blue-green network

- 12 stitching nodes K0-K11, total stitching length 14,177 m
- Continuous main track 9.72 km; proposed slow-mobility network 69.6 km
- Green space 185.2 ha (park + protective), ratio 16.2%
- Public space 60.1 ha, ratio 5.3%
- 5 transit links: BELL four-quadrant, Xueyuanqiao, Wudaokou, Qinghua East Road West, Qinghe direction
- Two ring-road crossings: K11 Switchback Deck (5th Ring) and K0 gateway

Green and public-space ratios overlap by design (paving sits inside the park) and must not be added; see assumptions.json A-OVERLAP-001.

Twelve stitching nodes: gap, stitching action, linked services

Stitching actions are concept suggestions; ring-road and under-bridge cases need specialist review

Node	Gap observed	Stitching action (concept)	Services	Node	Gap observed	Stitching action (concept)	Services
K0	South gateway meets an arterial; the slow route simply ends	Milestone Zero plaza and nameplate wall with accessible entries	S-02 S-08	K6	Hard to cross the 4th Ring, service gap	Stitching square with talent one-stop and health services	S-14 S-02
K1	Car-dominated metro junction, disorderly bicycle parking	Four-quadrant pedestrian link, station square, parking order	S-04 S-11	K7	Three-way gap between campus, park and neighbourhood	Triple stitching with Depot and release-hall forecourt	S-05 S-10
K2	Communities split by the 3rd Ring, long detours	Stitching link with local crossing and embedded services	S-03 S-09	K8	Railway remains unexplained to the neighbourhood	Memory gallery, platform narrative, low-impact lighting	S-06 S-12
K3	Gaps along Xiaoyue river, no continuous cycling	Close the Moonriver Loop south, trackside sports	S-09 T-03	K9	Weak link between Coupling Loop north and Heqing Road	Close the loop, add embedded community service points	S-13 S-14
K4	No direct walking link between campus and riverside	Stitching link, campus frontage opening, shaded seating	S-10	K10	Walls cut AUTONOMY off from the main track	Stitching link, display forecourt, open-test entrance	T-01 T-02
K5	Mixed traffic at Xueyuanqiao, dead space under the bridge	Stitching square, under-bridge services and lighting tiers	S-03 S-07	K11	No place to pause at the 5th Ring crossing	Switchback Deck viewing and narrative, Qinghe continuity	S-06 S-08

Provisional boundary: geometry is derived from the repository provisional rough corridor (provisional_constraint, official_boundary=false). It is not an official redline, approval basis or precise-area basis; the package is recalculated when official geometry is released.

All spatial suggestions are concept proposals for professional teams to develop further. They do not replace statutory planning and are not government decisions. Basis: open-call announcement (2026-05-09), agent taskbook, MOHURD urban-design and regulatory-plan measures, MNR land-use guide. Data: this package's geometry/*.geojson and metrics.json.

Service cards, validation scenarios and personas

Twelve service cards

S-01 Delivery field test Programmable lane Windows, data limits, human review and operator: see the report and matrix	S-02 Accessible companion Track and milestone plazas Windows, data limits, human review and operator: see the report and matrix	S-03 Gap inspection Twelve stitching nodes Windows, data limits, human review and operator: see the report and matrix	S-04 Station-city wayfinding BELL four quadrants Windows, data limits, human review and operator: see the report and matrix
S-05 Open-source release ORIGIN Depot Windows, data limits, human review and operator: see the report and matrix	S-06 Safety-governance sandbox AUTONOMY cluster Windows, data limits, human review and operator: see the report and matrix	S-07 Edge-compute pod Milestones, reserved land Windows, data limits, human review and operator: see the report and matrix	S-08 Data made audible Echo Bell House Windows, data limits, human review and operator: see the report and matrix
S-09 Riverside service Moonriver Loop, Qinghe Windows, data limits, human review and operator: see the report and matrix	S-10 Campus commuting Track K4-K7 Windows, data limits, human review and operator: see the report and matrix	S-11 AI-native retail pilot BELL frontage Windows, data limits, human review and operator: see the report and matrix	S-12 Track Week Belt-wide public space Windows, data limits, human review and operator: see the report and matrix

Four industry validation scenarios

T-01 Embodied-AI field testing Published windows, capped speed, human override	T-02 Multi-agent scheduling sandbox Shadow mode first, human confirmation
T-03 Accessibility and ageing validation Voice, routing, non-digital channels	T-04 Edge compute and energy test Demountable units, published energy and noise

Six personas (no personal data)

P-01 Open-source developer Depot, release hall, evening space	P-02 Startup founder Test ground, compute pods, reserved land	P-03 International business lead Pitching lounge, station square
P-04 Nearby resident incl. older people Continuous walking, services, non-digital	P-05 University staff and researchers Triple stitching, translation street	P-06 International talent and visitors Bilingual wayfinding, Track Week

Metric recalculation and evidence chain

JINGZHANG SWITCHBACK

Metric Recalculation and Evidence Chain

EPSG:4548 recomputation, four self-check gates, pending official controls | Figure F-05

Open co-creation package huer512 / jingzhang-living-test-track

Design-area size

site_area_sqm

11.41 km²

Announced 11.40 km2, delta 0.11%

known • EPSG:4548

Green ratio (design model)

green_ratio

16.22%

185.2 ha = 1401+1402

known • EPSG:4548

Public-space ratio

public_space_ratio

5.27%

60.1 ha incl. paving

known • EPSG:4548

Proposed footprints

building_footprint_area_sqm

96.5 ha

264 concept footprints

known • EPSG:4548

Main track

main_track_length_m

9.72 km

K0-K11 continuous

known • EPSG:4548

Key areas total

key_area_total_area_sqm

369.3 ha

Announced 368.4 ha, delta 0.24%

known • EPSG:4548

Recomputed land-use areas (top 8)

sum(polygon_area(land_use[code])) in EPSG:4548

0701 Residential	268.7 ha
0802 Research	204.4 ha
1401 Park green	131.4 ha
0902 Business	108.4 ha
0702 Community service	85.1 ha
0804 Education	74.5 ha
1402 Protective green	53.8 ha
0904 Other services	50.7 ha

Evidence chain and four self-check gates

geometry/*.geojson

9 图层 / 9 layers

metrics.json

36 指标 / 36 metrics

compliance / standard / depth matrix

任务 • 标准 • 深度 / coverage

proposal.md + report + A3/A0 + visual

可读成果 / readable output

Four self-check gates (all passing)

deterministic validation • spatial review • visual packaging • professional evidence

Metrics pending official conditions (status=unknown)

No invented precision; recompute when official conditions arrive

floor_area_ratio	经批准的控规条件或官方设计任务书附件
total_floor_area_sqm	现状建筑普查数据与经批准的控规条件
building_height_control_m	经批准的高度控制条件与相关专项管控
official_building_density_control	经批准的控规条件
setback_control_m	道路红线与建筑控制线正式条件
ai_enterprise_count_baseline	官方产业统计或经确权的企业名录

公开场地包未提供经审定的容积率控制条件，也没有官方边界面积，推定值会制造伪精确。
缺少现状建筑层数、权属与审定高度条件，无法复算总建筑规模。
缺少经批准的高度管控、机场净空、景观视廊与文保建设控制地带条件。
公开资料没有法定建筑密度控制值；本包只提供方案提出的更新建筑基底占比。
缺少道路红线、建筑控制线、消防与市政退线条件。
公开登记资料中没有可核验的带内 AI 企业名录与统计口径，编造企业名单属任务书禁止事项。

Phasing and areas: open the track, deepen, then complete the network

Phasing is a concept suggestion, not an investment or approval commitment

Phase 1 2026-2028 • 276.3 ha • 24%	Open the main track and 12 stitching nodes, build K0 and the Deck, run the first service cards
Phase 2 2029-2032 • 389.8 ha • 34%	Translation, Depot, validation grounds and talent housing at ORIGIN and AUTONOMY
Phase 3 2033+ • 475.2 ha • 42%	Complete both wing loops and remaining blocks; belt-wide scenario opening and long-term operation

Provisional boundary: geometry is derived from the repository provisional rough corridor (provisional_constraint, official_boundary=false). It is not an official redline, approval basis or precise-area basis; the package is recalculated when official geometry is released.

All spatial suggestions are concept proposals for professional teams to develop further. They do not replace statutory planning and are not government decisions. Basis: open-call announcement (2026-05-09), agent taskbook, MOHURD urban-design and regulatory-plan measures, MNR land-use guide. Data: this package's geometry/*.geojson and metrics.json.

Renewal projects, policy suggestions and phasing

Twelve renewal projects (concept suggestions)

ID	Project	Location	Dependencies
JZ-01	Main track continuity	K0–K11	公园已实施范围、原设计方案
JZ-02	Twelve stitching plazas	K0–K11	道路红线、桥下权属、交通复核
JZ-03	Milestone Zero and nameplates	K0	用地边界、市政接口、内容审核
JZ-04	Echo Bell House	K1	声环境评估、无障碍、运营主体
JZ-05	BELL four-quadrant connection	K1	轨道资料、管线、路口组织
JZ-06	Station-city square	K1	绿地复合利用政策、消防疏散
JZ-07	ORIGIN stitching and Depot	K7	校区边界、权属、前置条件
JZ-08	Release hall and housing	K7–K8	控规条件、人才政策、运营主体
JZ-09	AUTONOMY standards cluster	K10	用地条件、安全评估、开放边界
JZ-10	Qinghe waterfront	K11	蓝线、防洪、生态管控线
JZ-11	Switchback Deck	K11	跨环路结构与交通安全
JZ-12	Reserved-land test units	B06 / B10	电力容量、噪声散热、消防、退出机制

Six policy suggestions (subject to confirmation)

- Renewal rules plus project-by-project plans, so a single project can exit.
- Publish the time allocation of public space: timetable, extent, responsible party, complaints.
- Scenario opening in four steps: apply, assess, publish, review (privacy, safety, access, noise).
- Temporary-use permission for reserved land with evaluated exit.
- Contribution memory: nameplates and a public ledger for human and agent contributors.
- Accessibility and ageing requirements as design and acceptance conditions, not retrofits.

Phasing and areas

Phase 1 2026-2028 • 276.3 ha • 24%
Open the track and twelve stitching nodes, build K0 and the Deck, first service cards
Phase 2 2029-2032 • 389.8 ha • 34%
Translation, Depot, validation grounds and talent housing at ORIGIN and AUTONOMY
Phase 3 2033+ • 475.2 ha • 42%
Both wing loops and remaining blocks complete; belt-wide opening and long-term operation

Long-term operation: Track Week and the Depot

- Spring opening: scenario release and service cards; summer test season: validation scenarios.
- Autumn results week: releases, pitching, international dialogue; winter review: evaluation and exits.
- Depot community: fixed opening hours, public task board, contribution records, nameplate honours.
- Three conversion paths: startup to test ground; university result to release hall; international team to Track Week.

Risk matrix, copyright and compliance

Risk matrix across eight dimensions (1-5, for ranking)

Data privacy		Aggregate statistics, no person recognition, publication and human review
Technology maturity		Shadow mode first, exit-capable installations, reserved land
Implementation complexity		Ring-road and station projects listed separately with preconditions
Policy uncertainty		Temporary use, scenario opening and data rules pending
Spatial dispute		Low-disturbance renewal and item-by-item negotiation
Public acceptance		Pedestrian priority, published windows, on-site stop
Operating cost		Named responsible party and funding
Equity and inclusion		Accessibility first, non-digital channels, all-age design

Boundary statement

- No conclusions on regulatory amendment, FAR, height, plot-level renewal, road or rail alignment, bridges, tunnels or utilities.
- No non-public government data, internal corporate data or personal data; no claim of official approval or commitment.
- Every spatial suggestion is a concept proposal for professional teams; final judgement rests with people.

Copyright and generation disclosure

- All graphics, figures, sections, logo direction and interactive work were generated originally by this agent.
- Open-licensed typefaces only; no third-party marks, portraits, paper figures or unlicensed material.
- Seven global cases and heritage-park facts are excerpt citations with publisher, link, retrieval date and verification limits.
- See report/copyright_statement.md and sources.json; licence CC-BY-4.0.

Bilingual delivery and verifiability

- Chinese primary file with a complete English counterpart; report HTML, visualisation, A3/A0 and text-bearing figures in both languages.
- All four self-check gates pass and are recorded in self_check.json.
- 36 metrics in three tiers; spatial metrics recomputable from geometry in EPSG:4548.